



INTERIOR COLOUR SCHEME

*** NOTE: This is not an approved document. Document must be locked ***

Purchasers: SARFARAZ KHAN & SHABANA AAFAQI
Telephone Res. / Bus: / (416) 524-2756
Decor Advisor: Terri Parisani
SARFARAZ KHAN & SHABANA AAFAQI
Scheduled Closing Date: Thursday, July 9, 2020
Property: 146 of Plan -
Project: North Oakville - Phase 1
Model and Elevation: WILLOW VALLEY (43-02) ELEV A

Layout Changes: ☐ Yes ☒ No Sketch Attached: ☒ Yes ☐ No Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Counter	Hardware
Kitchen / Breakfast	3 Hudson Coconut	Std. Uba Tuba	Standard Edge 9677
Laundry Room	2 Slab LPL Stainless	6697-46 Argento Romano	181
Powder Room	3 Slab Mpl Noce Nero CL	P-277-LM St Lawrence Bedrock	181
ENSUITE 4	3 Slab Mpl Oyster CL	1876K-52 Spring Carnival	181
Master Ensuite Bathroom	2 Slab PVC White Sugar	1877K-52 Autumn Carnival	197
Second Ensuite Bathroom (If Applicable)	2 Slab PVC White Sugar	4957K-22 Mocha Fantastico	197
ENSUITE 5	3 Slab Mpl Chocolate CL	1875K-52 Summer Carnival	113B

Comment

2. Floor Tile

	Selection
Entrance Vestibule	*UPG.6 ETERNA CALACATTA TAUPE 24 X 48
Main Hall	
Kitchen / Breakfast	*UPG.6 ETERNA CALACATTA TAUPE 24 X 48
Laundry Room	MALENA ICE 13 X 13
Powder Room	*UPG.6 ETERNA CALACATTA TAUPE 24 X 48
ENSUITE 4	CINQ WHITE 13 X 13
Master Ensuite Bathroom	CINQ BROWN 13 X 13
Second Ensuite Bathroom (If Applicable)	CINQ WHITE 13 X 13
Lower Landing (If Applicable)	
ENSUITE 5	MALENA IVORY 13 X 13

Comment

SIDE HALL/ ENTRY: BELLINA CREAM 13 X 13

3. Wall Tile

	Selection	Listello/Inserts	Describe
ENSUITE 4	CINQ WHITE 8 X 10	☐ Yes ☒ No	
Master Ensuite Bathroom			
Tub Deck		☐ Yes ☐ No	
Shower Stall	CINQ BROWN 8 X 10	☐ Yes ☒ No	
Bathroom Walls		☐ Yes ☐ No	
Second Ensuite Bathroom (If Applicable)	CINQ WHITE 8 X 10	☐ Yes ☒ No	
ENSUITE 5	MALENA IVORY 8 X 10	☐ Yes ☒ No	
Kitchen Backsplash	☐ Yes ☒ No		Backsplash Behind Fridge

Comment

45
TR



INTERIOR COLOUR SCHEME

*** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date: Thursday, July 9, 2020

Property: 146 of Plan -

Project: North Oakville - Phase 1

Model and Elevation: WILLOW VALLEY (43-02) ELEVA

Purchasers:

SARFARAZ KHAN & SHABANA AAFAQI

Telephone Res. / Bus: / (416) 524-2756

Decor Advisor: Terri Parisani

4. Plumbing Fixtures

☐	☐	☐	☐
Master Ensuite Bathroom	Second Ensuite	Powder Room	
☐	☐	☐	☐
Other Room - Specify		Other Washroom	

Comment

ALL FIXTURES TO REMAIN AS STANDARD

5. Hardwood Flooring

	Type and Stain	Upper Landing	Type and Stain
Main Hall	*LEVEL 2, SEE BELOW	Upper Hall	SANDED LANDING
Kitchen / Breakfast		Master Bedroom	
Living Room	*LEVEL 2, SEE BELOW	Bedroom #2	
Dining Room	*LEVEL 2, SEE BELOW	Bedroom #3	
Family Room	*LEVEL 2, SEE BELOW	Bedroom #4	
Den/Library	*LEVEL 2, SEE BELOW	Bedroom #5	
Entrance Vestibule		Other Room - Specify	
Lower Landing (If Applicable)	SANDED LANDING		

Comment

LEVEL 2, GEVALDO 4" BRUSHED WHITE OAK IN GREY KARIMA

6. Carpeting

	Upgrade	Description
Ground Floor	☐	
Second Floor	☐	W6761 SPIREA 11 HO55 FAWN
BASEMENT LANDING	☐	W6761 SPIREA 11 HO55 FAWN

	Type	Area
Upgrade Underpad	STANDARD	
Carpet on Stairs	Capped	Runner - *Upgrade

Comment

7. Fireplace

	Living Room	Family Room	Other Room - Specify
	Purchased	Purchased	Purchased
	As Per Plan	As Per Plan	As Per Plan
	N/A	N/A	N/A
Fireplace Type	☐	☐	☐
Mantle Type	☐	☐	☐
Colour / Stain	☐	☐	☐
Surround	☐	☐	☐
Hearth	☐	☐	☐

Comment

45
12



INTERIOR COLOUR SCHEME

*** NOTE: This is not an approved document. Document must be locked ***

Purchasers: SARFARAZ KHAN & SHABANA AFAQI
Telephone Res. / Bus: / (416) 524-2756
Decor Advisor: Terri Parisani
Scheduled Closing Date: Thursday, July 9, 2020
Property: 146 of Plan -
Project: North Oakville - Phase 1
Model and Elevation: WILLOW VALLEY (43-02) ELEV A

8. Trim Carpentry

Interior Doors	STANDARD	Front Door Glass Inserts	STANDARD	Door Handles	STANDARD
Interior Trim	STANDARD				
Comment					

9. Plaster Mouldings and Medallions

Standard Throughout ☐ Yes ☐ No ☒ N/A

Entrance Vestibule				Kitchen/Breakfast		
Main Hall				Den/Library		
Living Room				Lower Landing		
Dining Room				Other Room - Specify		
Family Room						
Comment						

10. Railings and Spindles

Railing Package STANDARD B

Railing Colour	*GREY KARMA	Spindle Colour	*GREY KARMA
Stringer / Riser	*GREY KARMA	Treads	*GREY KARMA
Comment		Oak Stairs	☒ Yes ☐ No ☐ N/A

*NOTE THAT PURCHASER IS AWARE THAT STAIN ON RED OAK STAIRS WILL NOT BE A PERFECT MATCH WITH THE WHITE OAK FLOOR THEY SELECTED

11. Wall Paint / Ceilings

Throughout Finished Areas SOUTHERN SHADOW

Trim Paint White

Smooth Ceilings

Ground Floor ☒

Second Floor ☒

Note

Comment

45
A



INTERIOR COLOUR SCHEME

*** NOTE: This is not an approved document. Document must be locked ***

Purchasers: SARFARAZ KHAN & SHABANA AFAQI
Telephone Res. / Bus: / (416) 524-2756
Decor Advisor: Terri Parisani
Scheduled Closing Date: Thursday, July 9, 2020
Property: 146 of Plan -
Project: North Oakville - Phase 1
Model and Elevation: WILLOW VALLEY (43-02) ELEVA

-12. Electrical

Hood Fan ☐ White ☐ Stainless ☒ N/A

Above Kitchen Cabinet Light ☐ Yes ☒ No
Below Kitchen Cabinet Light ☐ Yes ☒ No

Standard Appliances ☐

Over The Range Microwave ☐

Chimney Style Fan ☒

Comment

13. Heating and Air Conditioning

Air Conditioning

Gas Provisions Stove
Gas Provisions Barbecue

YES

Gas Provisions Dryer

Comment

14. Additional Comments

15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. KS SA Purchaser's initials
- 4) The Purchaser acknowledges reading and accepting the "Valery Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:


Signature: Shella

Date: Oct 29 2019

5
1

- ① - Telephone
- ② - Cable
- ③ - Electrical

Lot 146
 Cd. 29.19



Tile Direction


Willow Valley

Elevation A
 3,623 Sq.ft.


Includes 47 Sq.ft. of Finished Basement

Elevation B
 3,628 Sq.ft.


Includes 47 Sq.ft. of Finished Basement

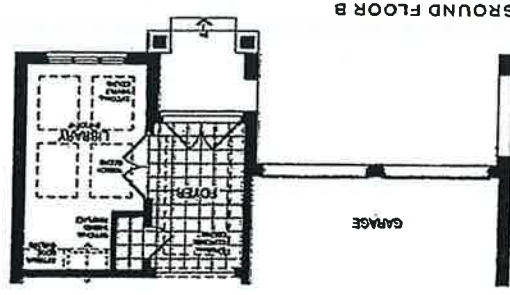


GROUND FLOOR B

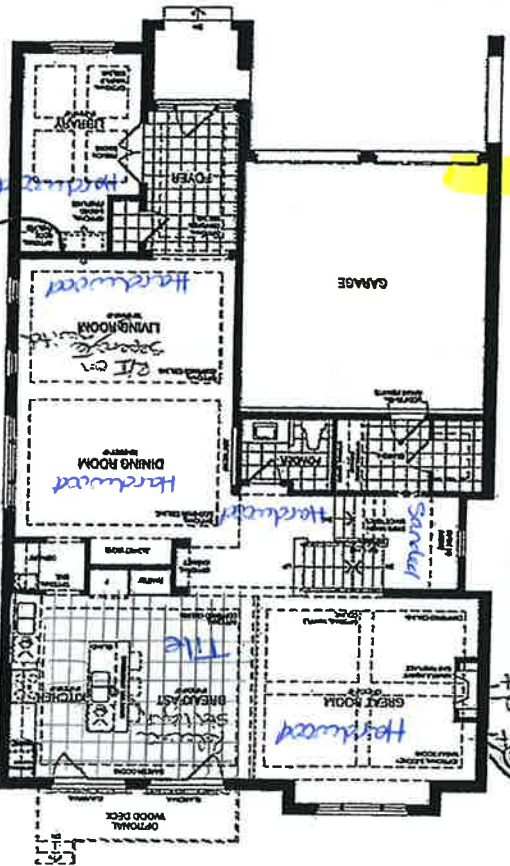


GROUND FLOOR A

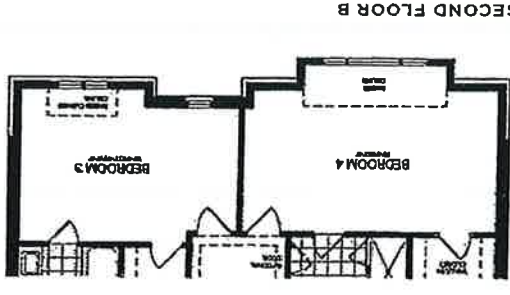


SECOND FLOOR B

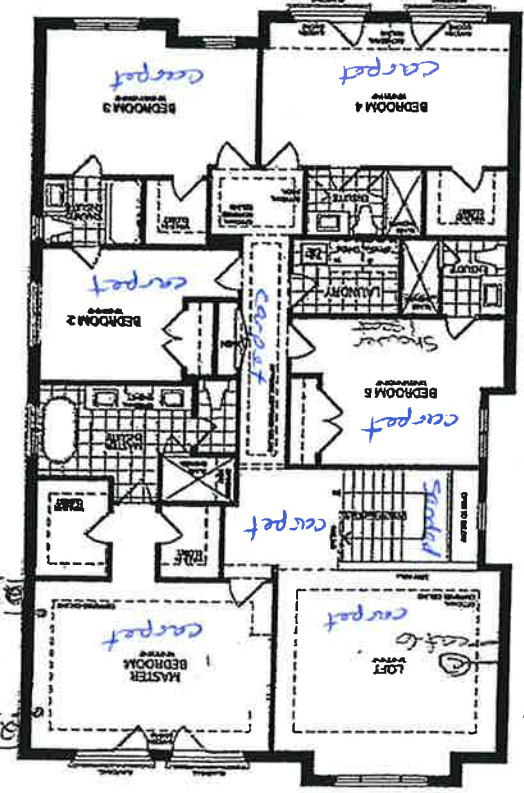

SECOND FLOOR A



BASEMENT B

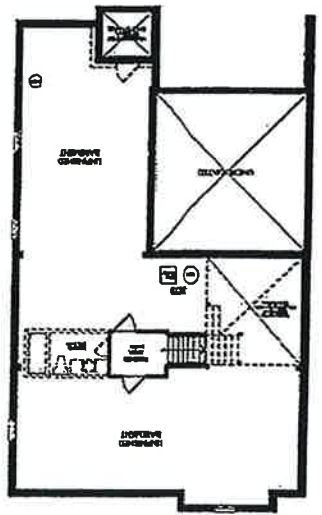

BASEMENT A

Disclaimer: All dimensions are approximate and subject to normal construction variances. Dimensions may exceed the usable floor area. Size and specifications subject to change without notice. Furniture is displayed for illustration purposes only and does not necessarily reflect the electrical plan for the suite. Sales are sold unfinished. Balcony and facade variations may apply, contact a sales representative for further details. E.A.O.E. ©Valley Homes 2018. All rights reserved.

VALENTY HOMES

July 11, 2019
 176
 54


STANDARD FEATURES:

- 100cm Upper cabinets
- Ceiling strip to underside of bulkhead in kitchen
- Backing on kitchen and Bath cabinets
- Kitchen countertops by others
- Post-form laminate countertops in baths and Laundry

Approved By Builder:

Date:

This sketch is for DESIGN PURPOSES ONLY – It is not meant to be an exact rendition.

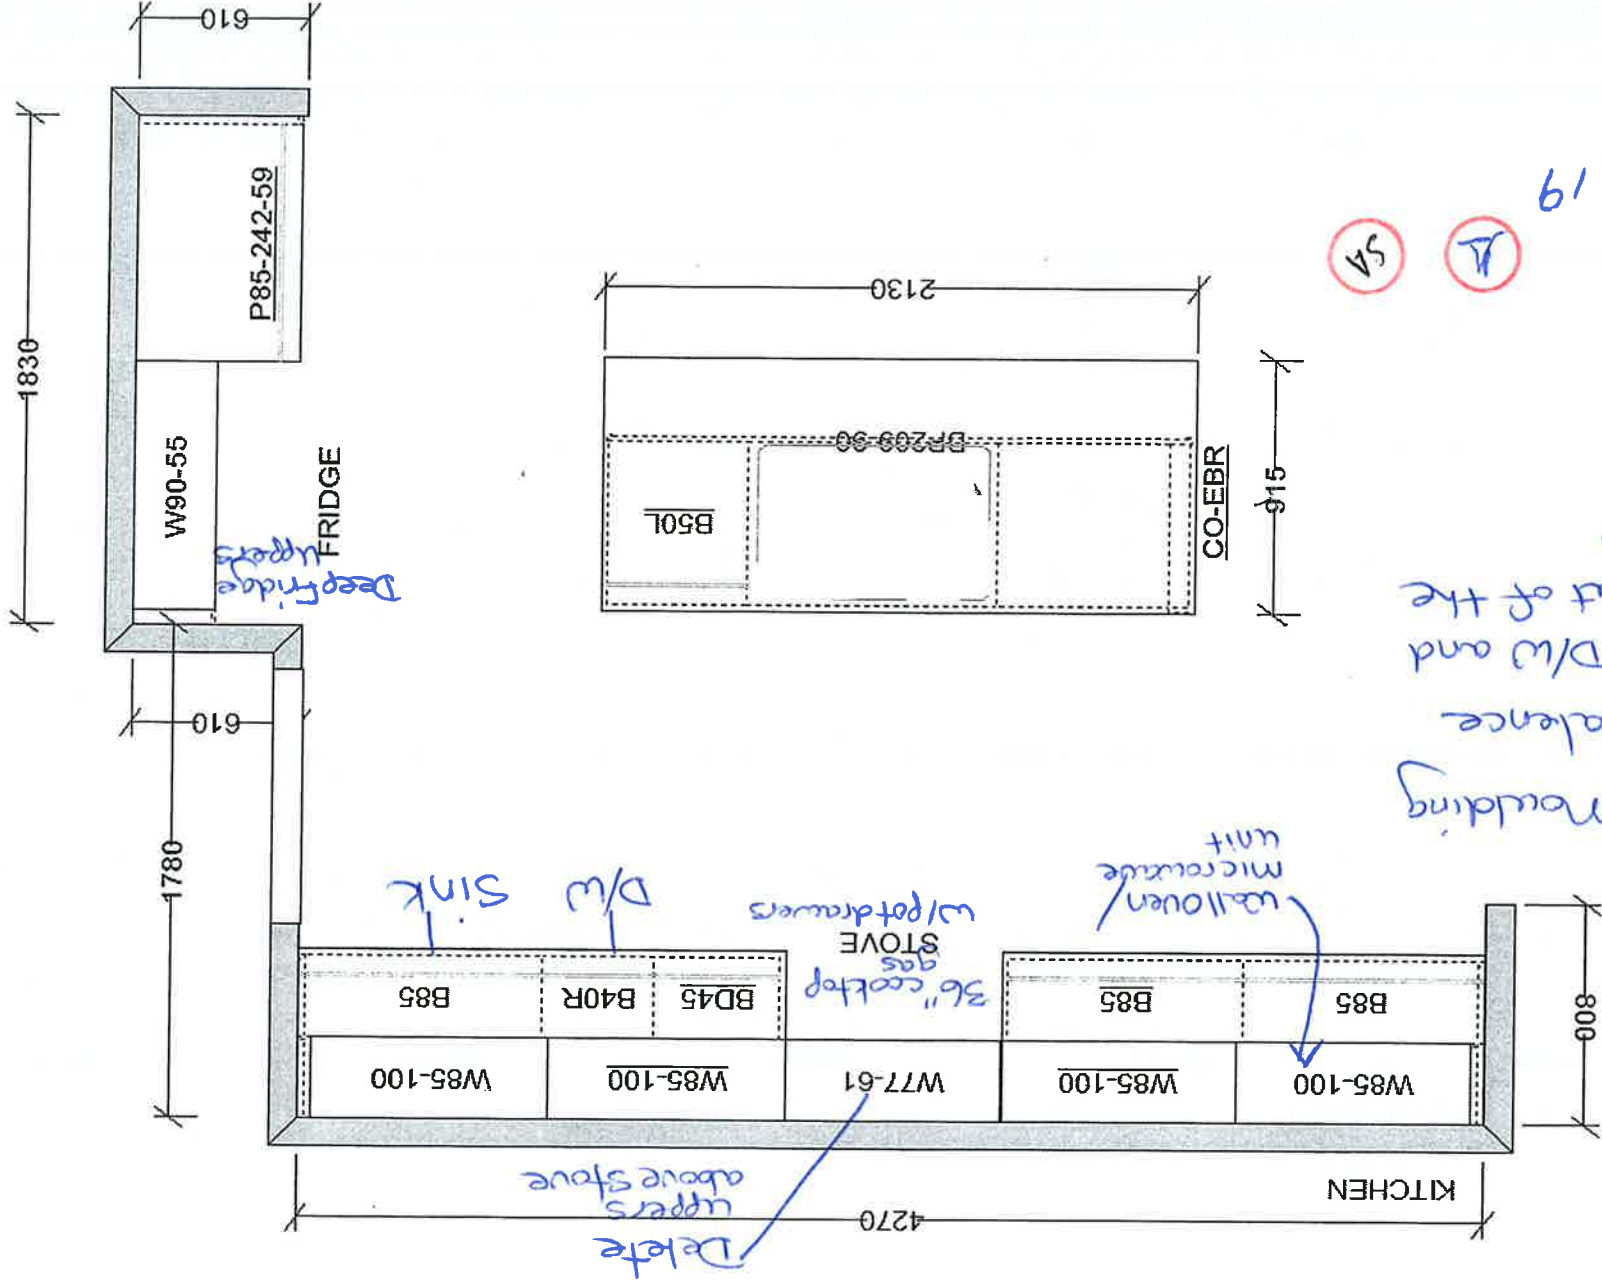

- Crown Moulding
- Light Valve
- Move D/W and sink out of the island.

61'68' to 91'146'

VS




F R E N D E L
K I T C H E N S L I M I T E D

Lot 146

Oct. 29, 19 *ll* SA

Knobs & Handles Selection

STANDARD

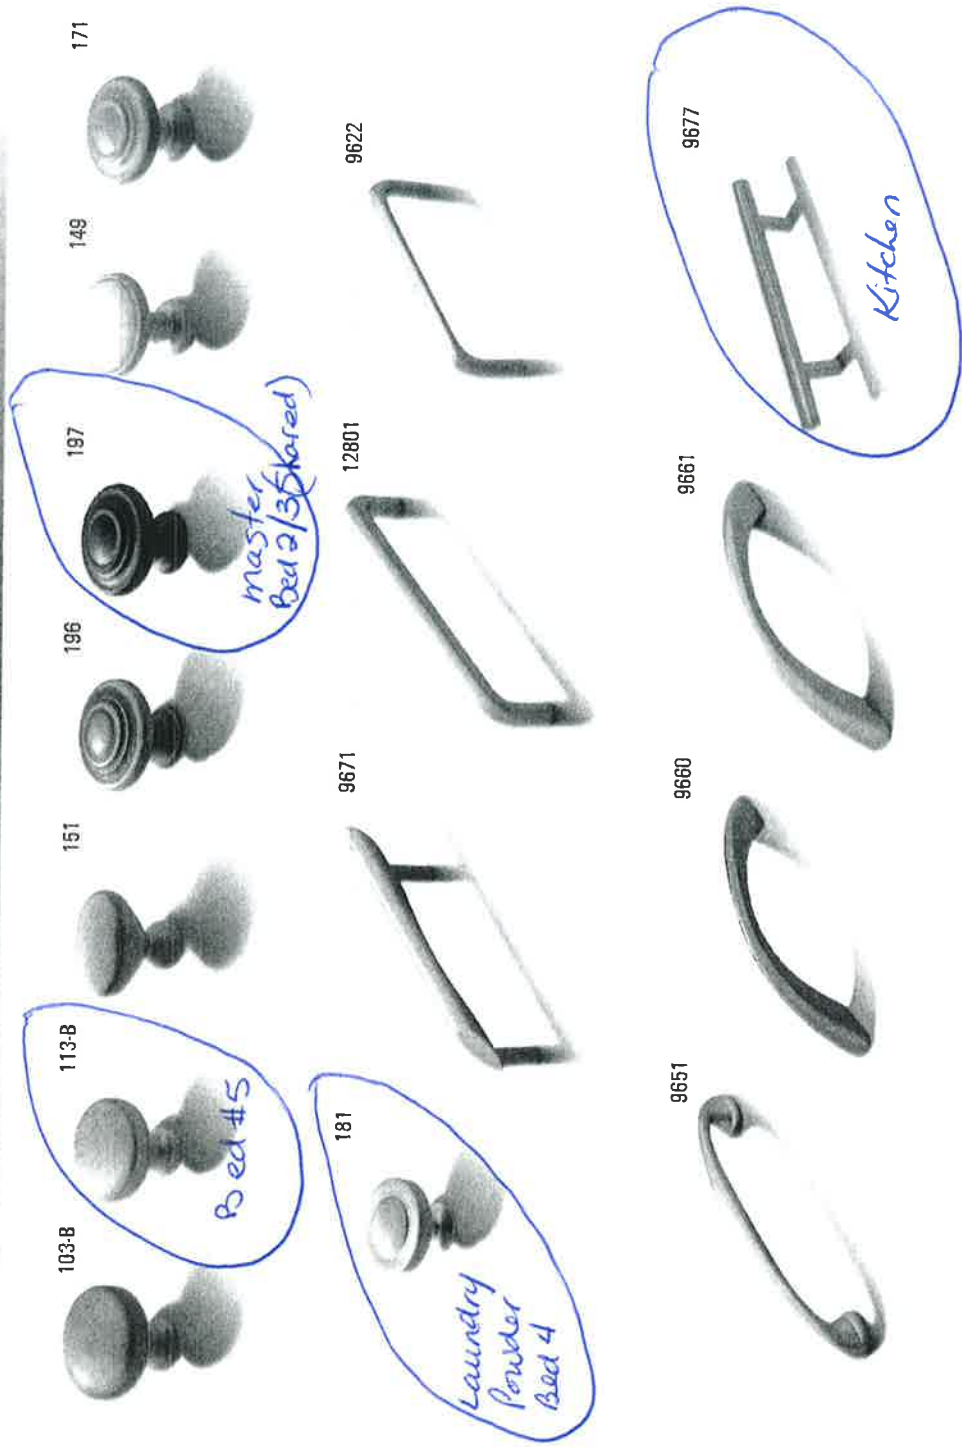

FRIGIDAIRE GALLERY


FGEW3066U F/D

SA SK

Lot 146

July 15, 2014

SINGLE WALL OVEN
30" ELECTRIC

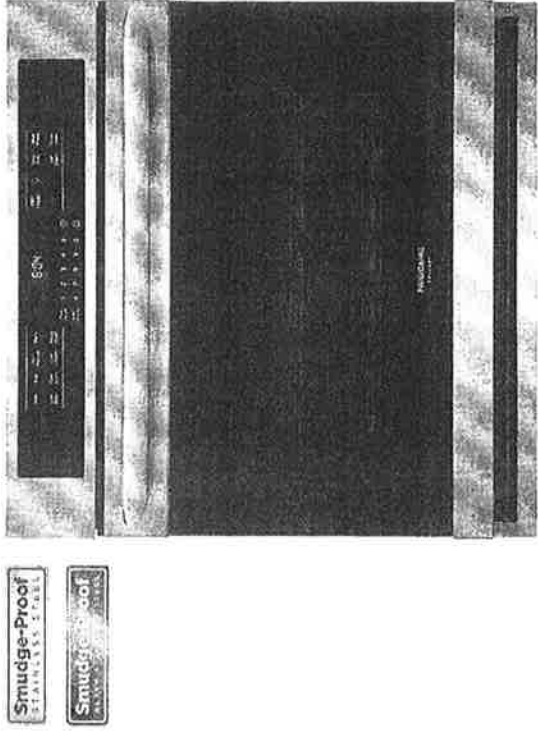

Smudge-Proof
STAINLESS STEEL

Smudge-Proof
GLASS

AVAILABLE
COLORS

D
Dark
Stainless

F
Stainless

PRODUCT DIMENSIONS

Height (Max.)	29"
Width	30"
Depth (Incl. Handle)	27-1/8"

MORE EASY-TO-USE FEATURES

Cleanup is Easy with Hidden Bake
Lower heating elements are beneath the oven floor, making for a smooth surface that is easy to clean.

Smudge-Proof* Stainless Steel
Resists fingerprints and cleans easily. Available in Stainless Steel and Black Stainless Steel finishes.

Our Largest Capacity Oven
Cook more at once with 51 cubic feet of oven capacity.

Easily Access Dishes with our Glide Rack
Rack easily glides in and out allowing you to access dishes from your oven.

Oven Rack Handles
Oven racks are designed with space for you to easily pull out the racks, even when wearing an oven mitt.


Easy to Clean with Self-Cleaning
Your oven cleans itself - so you don't have to. Self clean options available in 2, 3, and 4-hour cycles.

Even Baking Technology
Our Even Baking Technology ensures even baking every time.

CERTIFICATIONS

Star-K® Certified (Sabbath Mode)

SIGNATURE FEATURES

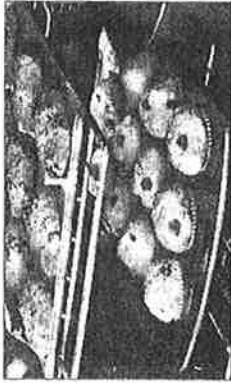


Faster, More Even Baking Results with True Convection

Get faster, more even multi-rack baking with a powerful convection fan and third heating element that evenly circulates hot air throughout the oven.



Effortless™ Temperature Probe

The Effortless™ Temperature Probe detects and alerts when the desired finished cooking temperature has been reached and automatically switches to the keep warm setting.

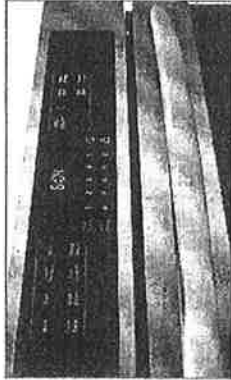

Quick Preheat

Preheat in just a few minutes.†

FRIGIDAIRE FIT PROMISE

Frigidaire Fit Promise

We promise that your new 27" or 30" Frigidaire® single or double wall oven will fit your existing cabinet cutout of the same width and configuration, or we will reimburse you for installation costs up to \$300.*

* Via mail-in rebate. See Frigidaire.com/FitPromise for additional information.

† Based on single rack cooking performance, not set temperature, using Quick Preheat.

lot 146

FGEW3066U D/F
SINGLE WALL OVEN
30" ELECTRIC

FRIGIDAIRE
GALLERY

FEATURES

Control/Timing System	Express-Select® Controls
Window	Extra-Large
Exterior Door Finish	Stainless-Proof® Stainless Steel (F) / Stainless-Proof® Black Stainless (D)
Handle Design	Stainless Steel (F) / Black Stainless (D)
Oven Cleaning System	Self-Clean w/ Steam Clean Option

OVEN CONTROLS

Bake/Broil	Yes / Variable (400 - 550 °F)
Effortless™ Convection Conversion	Yes
Convection Bake / Broil / Roast	Yes / Yes / Yes
Oven Preheat	Quick
My Favorite	
Slow Cook	
Effortless™ Temperature Probe	Yes
Keep Warm	Yes
Add-a-Minute	Yes
Delay Start	Yes
Self-Clean / Clean Options	Yes/2, 3, 4 Hours
Steam Clean	Yes
Delay Clean	Yes
Kitchen Timer	Yes
Timed Cook Option	Yes
Control Lock	Yes
Auto Oven Shut-Off	Yes
Oven Lock-Out	Yes

OVEN FEATURES

Capacity (Cu Ft.)	5.1
Convection System	True Convection
Oven Light	1 Halogen
Hidden Bake Element	Yes
Rack Configuration	2 Heavy Duty, 1 Offset Rack
Baking System	Even Baking Technology
Broiling System	Power Broil
Bake / Broil Element (Watts)	2,200 / 4,000

OPTIONAL ACCESSORIES

3" High Bottom Trim - Black Stainless (D) / Stainless Steel (F)	(D) PN # 5304520624 (F) PN # 5304520627
10' Long Armored Power Cable	PN # 903056-9010

CERTIFICATIONS

A.D.A. Compliant†	Yes
Star-K® Certified (Sabbath Mode)	Yes

SPECIFICATIONS


Oven Interior (H x W x D)	18 5/8" x 24 1/8" x 19 1/2"
Power Supply Connection Location	Left Bottom Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240 / 208 Volts*	4.5 / 3.4
Amps @ 240 / 208 Volts	18.8 / 16.3
Minimum Circuit Required (Amps)	20
Approved for Under-Counter Installation	Yes
Shipping Weight (Approx.)	145 Lbs.

PRODUCT DIMENSIONS

A - Height (Max.)	29"
B - Width	30"
C - Depth (Incl. Handle)	27 1/8"
D - Height (Wrapper)	27 3/16"
E - Width (Wrapper)	24-5/8"
Depth with Door Open 90°	45 3/4"

CABINET CUTOUT DIMENSIONS

Height (Min.) / (Max.)	27 1/2" / 28 5/8"
Width (Min.) / (Max.)	28 1/8" / 29"
Depth (Min.)	24"

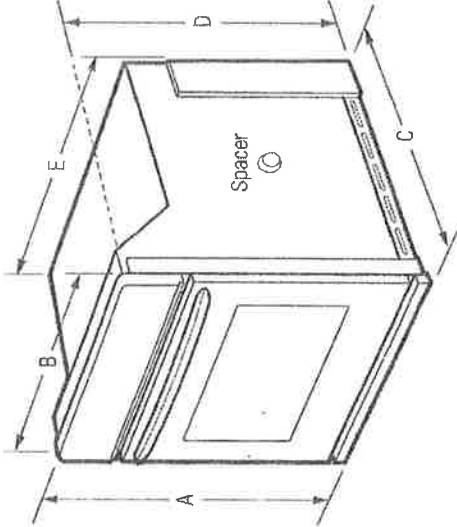

†When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.
2 Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line


Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca)

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

© 2019 Electrolux Home Products, Inc.
FGEW3066 03/19

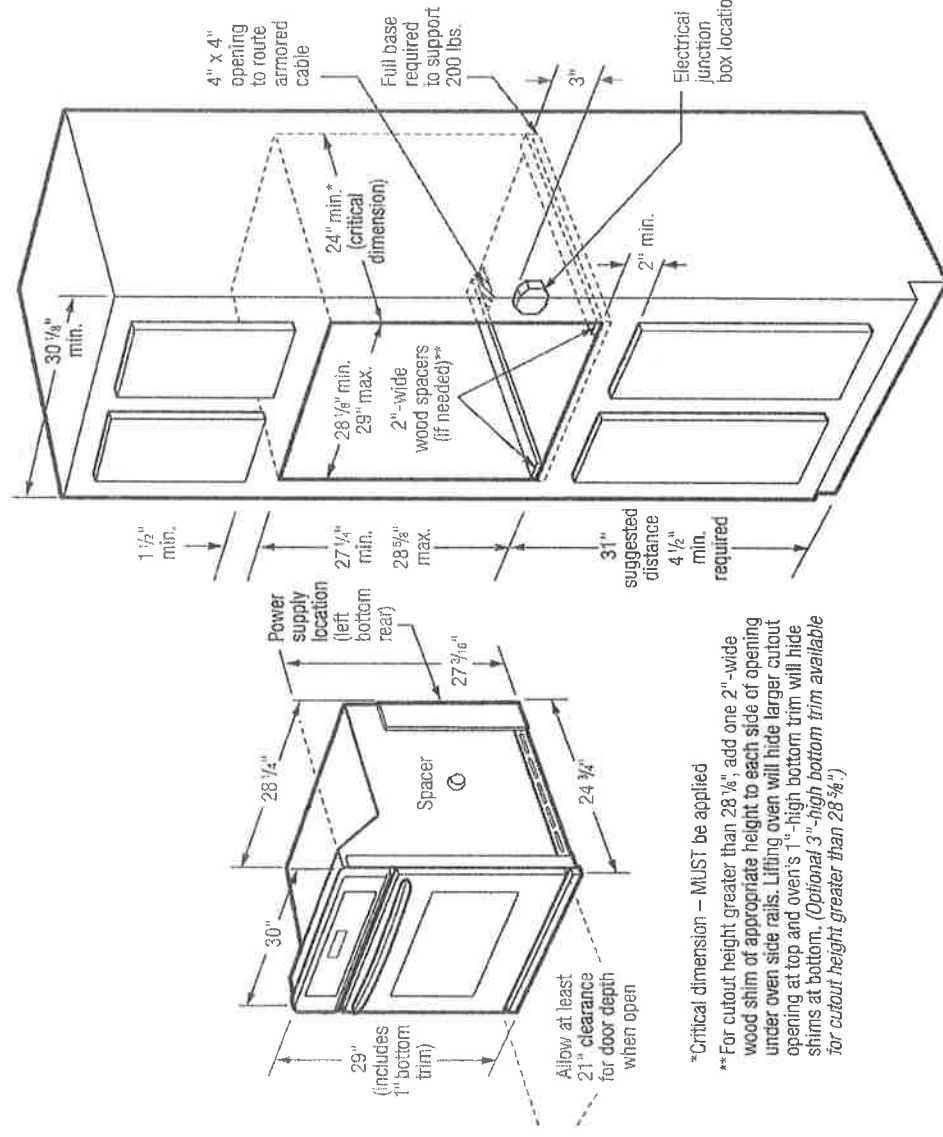

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) – 145 Lbs.
- Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240 / 208 Volts = 4.5 / 3.4 kW
- Amps @ 240 / 208 Volts = 18.8 / 16.3 Amps
- Recommended Circuit Breaker – 20 Amps
- Always consult local and national electric codes.
- Minimum 2" clearance for oven door depth when open.
- Suggested distance from floor is 3". Minimum required distance is 4-1/2".
- Minimum 24" deep cutout dimension is critical for proper installation, to ensure that oven's faceplate will fit flush against cabinet front.
- To adapt oven to fit cutout height greater than 28-1/8", add one 2"-wide wood shim of appropriate height to each side of opening under oven side rails. Lifting oval will hide larger cutout opening at top and oven's 1"-high bottom trim will hide shims at bottom. (*Standard 1"-High Bottom Trim included*.)
- To adapt oven to fit cutout height greater than 28-5/8", optional 3"-High Bottom Trim available.




FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • fridaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • fridaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca). Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca.

© 2019 Electrolux Home Products, Inc.
FGEW3066 03/19

Quick Guide to Operation *(continued)*

Feature	How to Operate
To use as a Kitchen Timer (☛page 23)	 →  →  Press once. To set time. Press once.
To set Stand Time (☛page 23)	 →  →  →  Press once. To set time. Press once. To set time. Press once.
To Use Delay Time (☛page 23)	 →  →  →  Press once. To set time. Press once. To set time. Press once.

Microwave Spec

SA SK


Lot 146

July 13, 2019



Specifications

Model Number	NN-SD973S	NN-SD773S NN-SD763S
Power Source:	120 V 60 Hz	
Power Consumption :	12.7 A 1500 W	
Cooking Power:*	1200 W	
Outside Dimensions (W x H x D):	23 ²⁷ / ₃₂ " x 14" x 20" (606 mm x 356 mm x 506 mm)	21 ²⁷ / ₃₂ " x 12" x 20" (555 mm x 304 mm x 506 mm)
Overall Oven Cavity Dimensions (W x H x D):	18 ¹⁷ / ₂ " x 11" x 18 ¹⁷ / ₃₂ " (470 mm x 278 mm x 469 mm)	18 ¹ / ₂ " x 9" x 16 ²⁹ / ₆₄ " (470 mm x 228 mm x 418 mm)
Operating Frequency:	2450 MHz	
Net Weight:	Approx. 16.7 kg (36.8 lbs.)	Approx. 14.3 kg (31.5 lbs.)

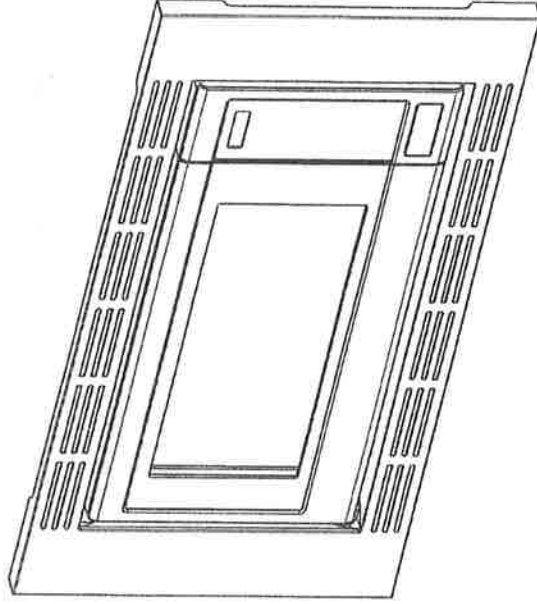

Trim kit

Installation Instructions

Notice d'installation


Instrucciones para la instalación

Cabinet Armoire Gabinete	Trim kit Nécessaire d'encastrement Juego de acabados
30" (762 mm) 30 po (762 mm) 30" (762 mm)	NN-TK932S NN-TK732S
27" (686 mm) 27 po (686 mm) 27" (686 mm)	NN-TK922S NN-TK722S

Read carefully and keep these installation instructions.
Lisez attentivement et conservez cette notice d'installation.
Lea cuidadosamente y guarde este instructivo de
instalación para su referencia.

Lot 146

- 2. Installation Diagram
- 2. Schéma d'installation
- 2. Diagrama de instalación

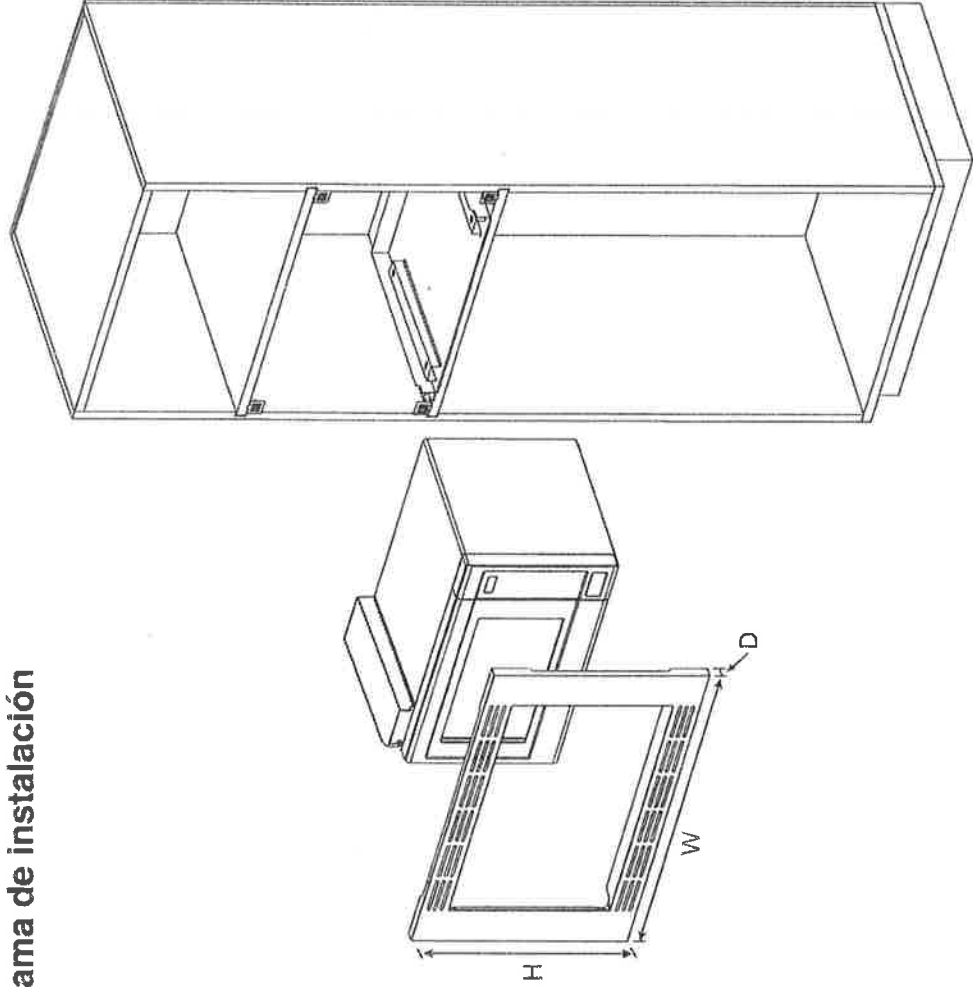

Trim Kit Dimensions			
	TK932S	TK922S	TK732S
Width	30" (760 mm)	27" (684 mm)	30" (760 mm)
Height	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)
Depth (Thickness)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)


Dimensions du nécessaire d'encastrement			
	TK932S	TK922S	TK732S
Largeur	760 mm (30 po)	684 mm (27 po)	760 mm (30 po)
Hauteur	472 mm (18 9/16 po)	472 mm (18 9/16 po)	419 mm (16 1/2 po)
Profondeur (épaisseur)	20 mm (3/4 po)	20 mm (3/4 po)	20 mm (3/4 po)

Dimensiones del juego de acabados			
	TK932S	TK922S	TK732S
Ancho	30" (760 mm)	27" (684 mm)	30" (760 mm)
Altura	18 9/16" (472 mm)	18 9/16" (472 mm)	16 1/2" (419 mm)
Profundidad (grosor)	3/4" (20 mm)	3/4" (20 mm)	3/4" (20 mm)

3-1. Cabinet Diagram and Dimensions (For TK932S)

3-1. Schéma de l'armoire et dimensions (Pour TK932S)

3-1. Dimensiones y diagrama del gabinete (Para TK932S)

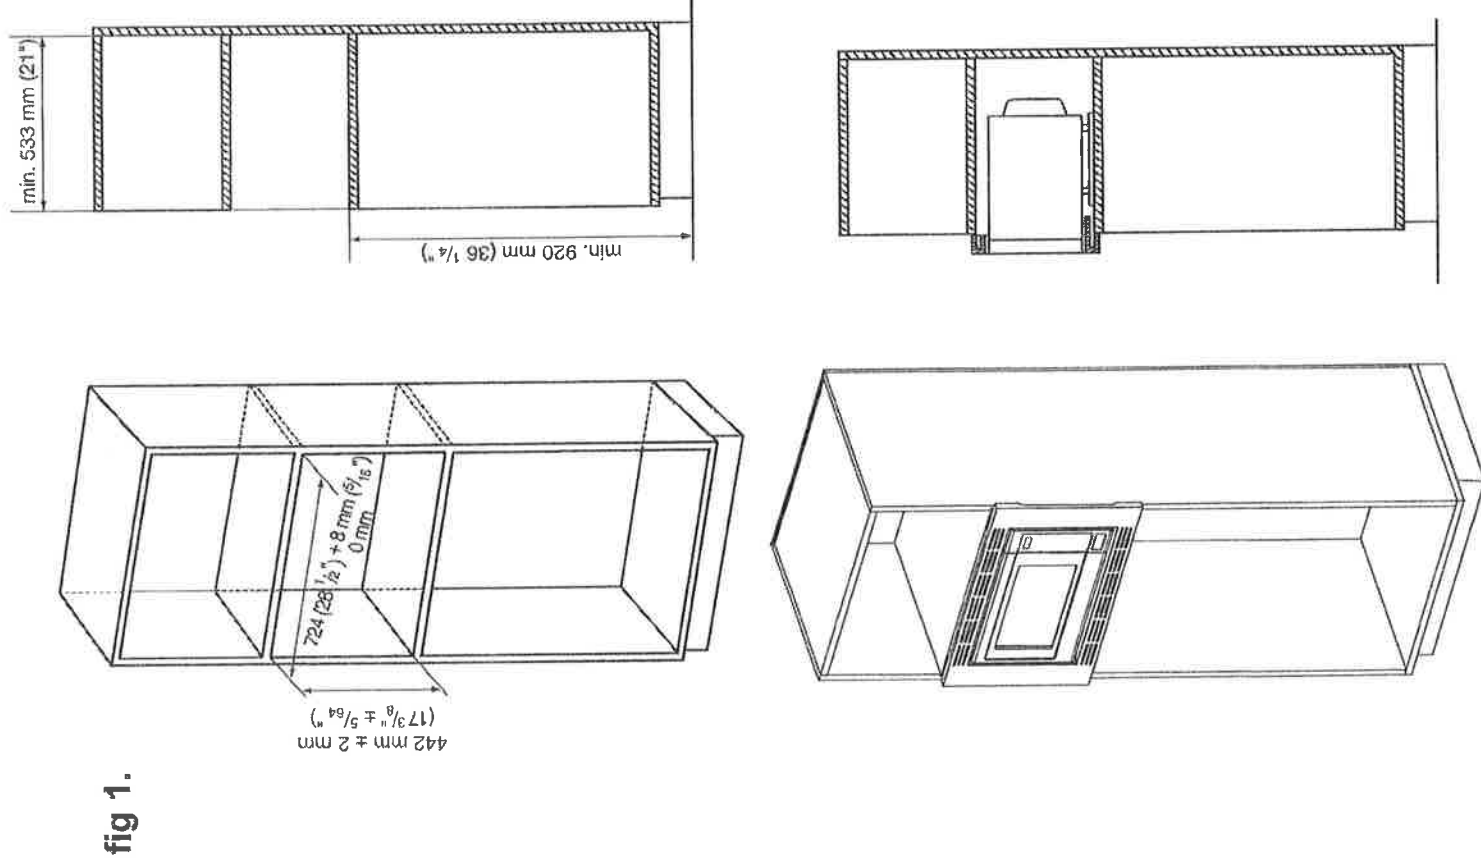

FRIGIDAIRE
GALLERY

SA SK


Lot 146

July 15, 2019

Built-In Cooktops

FGGC3645Q S/W/B

36" Gas

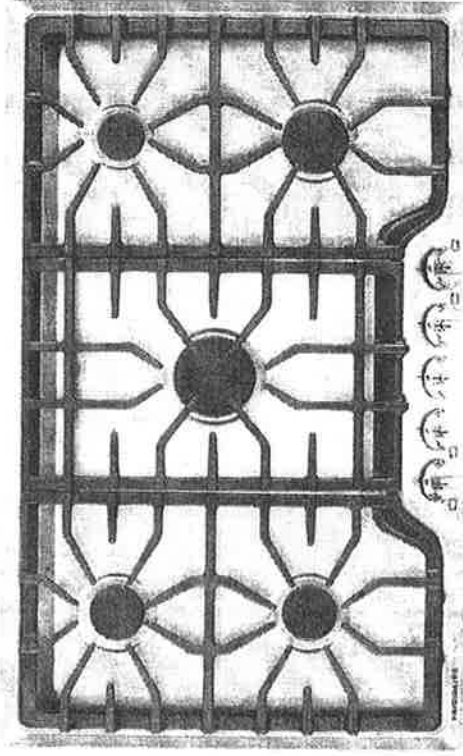

Product Dimensions

Width	36"
Depth	21-3/4"
Height	4-1/4"

More Easy-To-Use Features

Electronic Pilotless Ignition

LP Gas Conversion Option

A.D.A. Compliant


When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.



Available in:


Stainless (S)	White (W)	Black (B)
---------------	-----------	-----------

Signature Features




Express-Select® Controls

Easily go from warm to boil.




Continuous Corner-To-Corner Grates

Continuous grates make it easy to move heavy pots and pans between burners without lifting.



Approved Over Frigidaire® Electric Wall Ovens

Cooktops are approved for installation above any of our Single Electric Wall Ovens.



Low Simmer Burner

Perfect for delicate foods and sauces.


frigidaire.com

Lot 146

Features	
Controls	Express-Select™
Surface Type	Stainless Steel Recessed (S), Color-Coordinated Recessed (W/B)
Sealed Gas Burners	Yes
Grates	Continuous Corner-To-Corner Cast Iron w/Black Matte Finish
Right Front Burner (BTU)	12,000
Right Rear Burner (BTU)	5,000
Left Front Burner (BTU)	9,500
Left Rear Burner (BTU)	9,500
Center Burner (BTU)	750 - 16,000
Control Location	Front
Knob Color	Stainless (S), Color-Coordinated (W/B)
Knob Type	Cast Metal (S), Plastic (W/B)
Certifications	
A.D.A. Compliant	Yes
Specifications	
Power Supply Connection Location	Right Rear
Gas Supply Connection Location	Right Rear
LP Gas Conversion Kit	Included
Voltage Rating	120V / 60 Hz / 15A
Amps @ 120 Volts	1.0
Minimum Circuit Required (Amps)	15
Approved for Electric Single Wall Oven Combination Installation*	Yes
Shipping Weight (Approx.)	60 Lbs.

*When properly installed, this model is A.D.A. qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

*Cooktops are approved for installation above any of our Electric Single Wall Ovens.

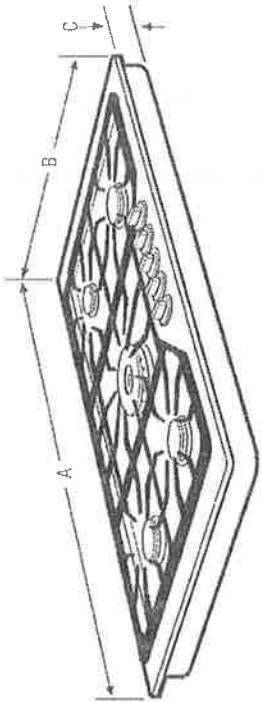

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Width	36"
B - Depth	21-3/4"
C - Height	4-1/4"

Cutout Dimensions	
Width (Min.) / (Max.)	33-7/8" / 34-1/4"
Depth (Min.) / (Max.)	19-3/8" / 19-3/4"
Height	8"

Granite Cornerpiece
Installation Kit available.

FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGGC3645Q 08/15

© 2015 Electrolux Home Products, Inc.

Accessories information available
on the web at frigidaire.com

Specifications
subject to change

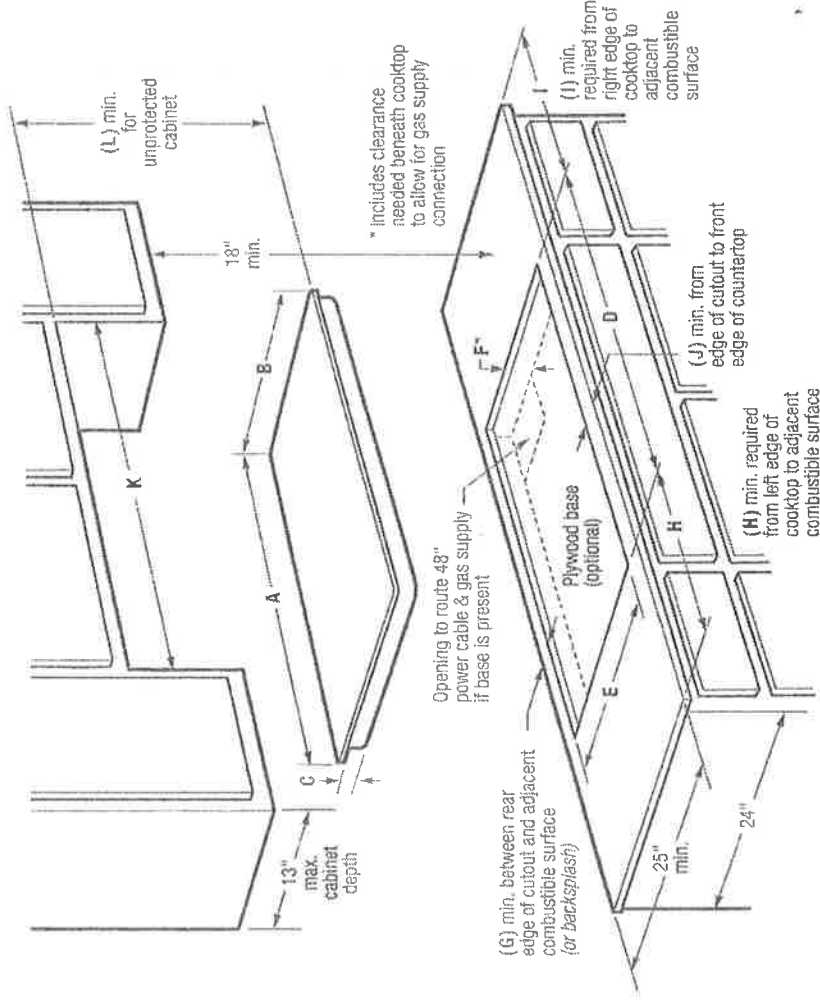

Product Dimensions				Required Clearances			
A - Width	B - Depth	C - Height		G (min.)	H (min.)	I (min.)	J (min.)
36"	21-3/4"	4-1/4"		2"	12"	12"	2-1/4"
Product Cutout Dimensions				K - Cabinet Opening Width (min.)	L - For Unprotected Cabinet (min.)	Utility Connection Locations	
D - Width (min. - max.)	E - Depth (min. - max.)	F - Height (min.)*		36"	34"	Power Supply	Gas Supply
33-7/8" - 34-1/4"	19-3/8" - 19-3/4"	8"				Right Rear	Right Rear

Built-In Cooktop Specifications

- Product Shipping Weight (approx.) – 60 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.
- Amps @ 120 Volts = 10 Amps
- Always consult local and national electric and gas codes.
- Cooktop cutout height includes clearance needed beneath cooktop to allow for gas supply connection. Recommended location for grounded 120V outlet is on rear wall in an 8"-wide by 10"-high area, positioned 22" above floor surface and 4" from right side of cooktop centerline. Access to underside of cooktop and junction box must be provided for inspection and service.
- Cooktop snips with 3/4" factory regulator.
- LP Gas conversion kit supplied.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than 36".
- Allow 34" minimum clearance between top of cooktop platform and bottom of unprotected wood or metal overhead cabinet.
- Allow 2" minimum distance between rear edge of cutout and adjacent combustible surface (or backsplash).
- Allow 12" minimum required clearance from left edge of cooktop to adjacent combustible surface and 12" minimum from right edge of cooktop to adjacent combustible surface.
- Installation of drawer beneath cooktop requires 6-1/2" minimum clearance beneath countertop surface, and assured clearance for gas and electrical connections.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Gas Built-In Cooktop model FGGC3645Q is approved to be used over any Frigidaire® Electric Single Wall Oven. (Refer to Gas Cooktop Installation Over 30" / 27" Electric Single Wall Oven Specifications page on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidare.com for detailed instructions.

Optional Accessories

- Granite Countertop Installation Kit – (PN # 903103-9010).

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28261 • 1-800-FRIGIDAIRE • frigidare.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidare.ca
FGGC3645Q 08/75


© 2015 Electrolux Home Products, Inc.

Accessories information available on the web at frigidare.com



Specifications subject to change

Quick Guide to Operation *(continued)*

Feature	How to Operate	
To use as a Kitchen Timer (☛ page 23)	 → 	 Press once.
To set Stand Time (☛ page 23)	 →  → 	 Press once. To set time. Press once.
To Use Delay Time (☛ page 23)	 →  → 	 Press once. To set time. Press once.

Microwave



Specifications

Model Number	NN-SD973S NN-SD773S NN-SD763S
Power Source:	120 V 60 Hz
Power Consumption :	12.7 A 1500 W
Cooking Power:*	1200 W
Outside Dimensions (W x H x D):	23 ²⁷ / ₃₂ " x 14" x 20" (606 mm x 356 mm x 506 mm) 21 ²⁷ / ₃₂ " x 12" x 20" (555 mm x 304 mm x 506 mm)
Overall Oven Cavity Dimensions (W x H x D):	18 ¹ / ₂ " x 11" x 18 ¹⁵ / ₃₂ " (470 mm x 278 mm x 469 mm) 18 ¹ / ₂ " x 9" x 16 ²⁹ / ₆₄ " (470 mm x 228 mm x 418 mm)
Operating Frequency:	2450 MHz
Net Weight:	Approx. 16.7 kg (36.8 lbs.) Approx. 14.3 kg (31.5 lbs.)



Specifications

(continued)

Trim Kit for 27" Cabinet:

	NN-SD973S	NN-SD773S	NN-SD763S
Model Number:	NN-TK922S	NN-TK722S	
Outside Dimensions (W x H):	684 mm x 472 mm (27" x 18 5/8")	684 mm x 419 mm (27" x 16 1/2")	
Cabinet Opening (W x D x H):	648 mm x 533 mm x 422 mm (25 1/2" x 21" x 17 3/8")	648 mm x 533 mm x 389 mm (25 1/2" x 21" x 15 5/16")	

Trim Kit for 30" Cabinet:

	NN-SD973S	NN-SD773S	NN-SD763S
Model Number:	NN-TK932S	NN-TK732S	
Outside Dimensions (W x H):	760 mm x 472 mm (30" x 18 5/8")	760 mm x 419 mm (30" x 16 1/2")	
Cabinet Opening (W x D x H):	724 mm x 533 mm x 422 mm (28 1/2" x 21" x 17 3/8")	724 mm x 533 mm x 389 mm (28 1/2" x 21" x 15 5/16")	

*IEC Test procedure

Specifications subject to change without notice.

SA SK

Lot 146

July 15, 2019

User's Record

The serial number of this product may be found on the back side of the oven or on the left side of the control panel.

You should note the model number and the serial number of this oven in the space provided and retain this book as a permanent record of your purchase for future reference.

Model No. _____

Serial No. _____


Date of Purchase _____

FRIGIDAIRE

SA SK

Lot 146


July 15, 2019

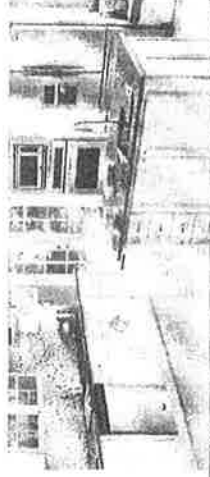


Glass Canopy Wall-Mount Hood

FHWX6650LS

36" Stainless Steel

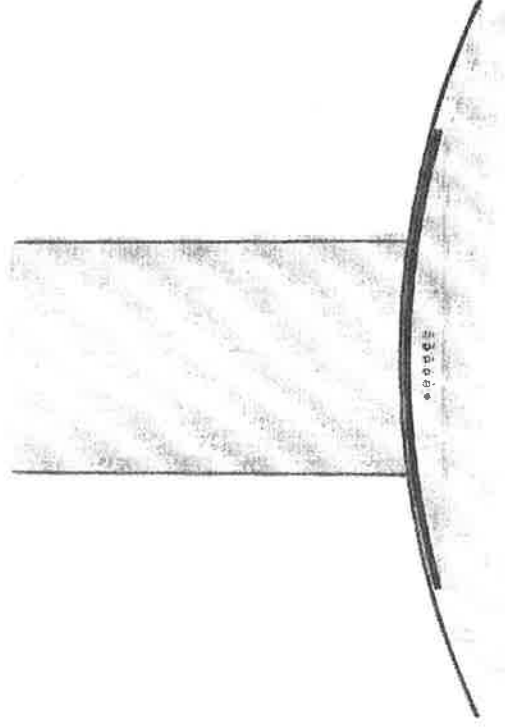


Signature Features



Glass Canopy Design
Glass and stainless steel construction is as attractive as it is functional.



Centrifugal Fan
Move air quietly and efficiently — up to 400 cu. ft. of air per minute.



Washable Filters
Dishwasher-safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.



Halogen Lighting
For bright illumination of the cooktop surface.

Features

Nominal Width	36"
Installation Type	Wall Mount
Style	Stainless Steel/ Glass Canopy
Air Discharge	Vertical
Air Delivery (CFM)	400
Blower Type	Centrifugal
Controls	Electronic Push Button
Fan Speeds	3
Sound Level (dBA)	67.1
Dual Halogen Lights	Yes
Dishwasher-Safe Filter†	Yes
Exhaust Duct	Convertible*
Duct Required	6" Round

Optional Accessories

Duct-Free Kit	PN# FHWRT60LS
10' Flue Extension Kit	PN# FHWX60LS

Specifications

Product Dimensions -	
Height (With One Cover) (With Flue Extension)	22-11/16" min. 26-1/2" min. 43-29/32" max
Width	35-11/32"
Depth	79-11/16"
Voltage Rating	120V/60Hz/15A
Amps @ 120 Volts	4.0
Connected Load (kW Rating) @ 120 Volts†	0.516
Shipping Weight (Approx.)	54 Lbs.
Sones Rating	6.5

*Ventilation is convertible to be either ducted outside or recirculated inside requiring no ducting. (Recirculated option requires use of optional Duct-Free Kit.)
†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.


Specifications subject to change.

Available in:

Stainless
(S)

frigidaire.com

Lot 146

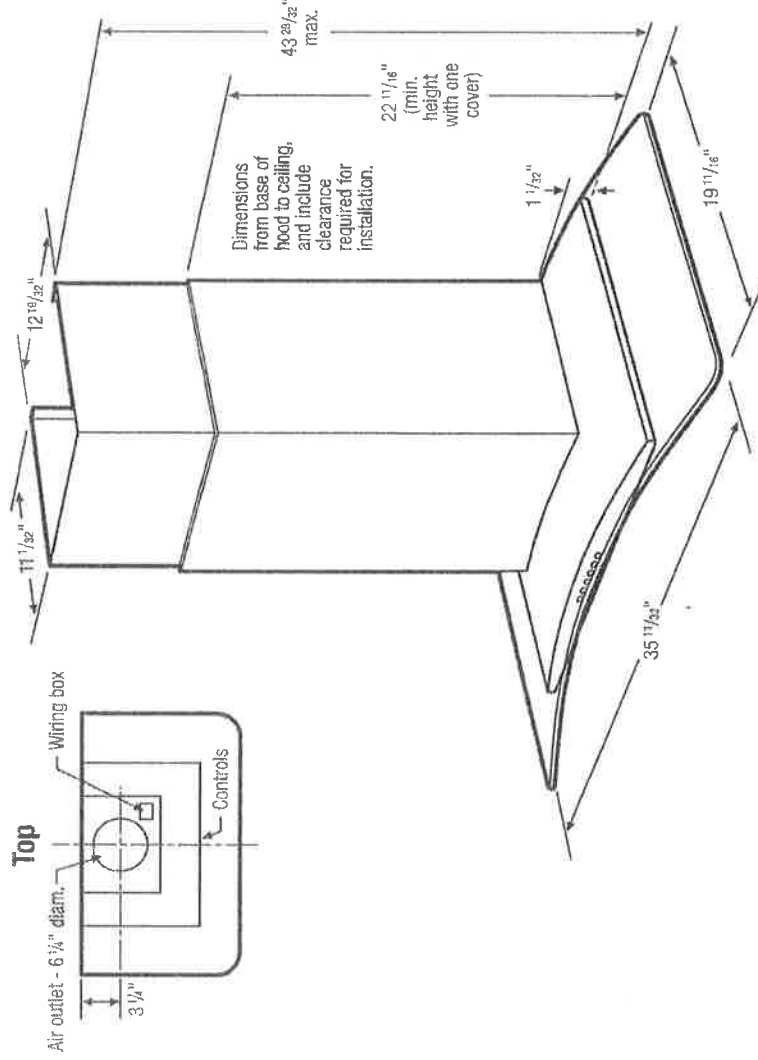

Glass Canopy Wall-Mount Hood Specifications

- Product Shipping Weight (approx.) - 54 Lbs.
- Wall-Mount Installation
- Ventilation system is preset to exhaust air outside. If outside ducting is not possible, optional Duct-Free Recirculation Kit (PN # FHWRT60LS) is available to convert ventilation to allow air to recirculate inside. (Refer to Ducted Option Specifications for outside ventilation.)
- Sones Rating - 6.5
- Voltage Rating - 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.516kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 4 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Minimum installation height allowed from bottom of hood to standard 36"-high electric or gas cooking surface is 26" - 35"; (NOT more than 32" recommended.) For detailed instructions regarding install heights in 8', 9' and 10' ceiling applications, refer to installation guide on web.
- To prepare mounting surface, adequate structure and support must be provided, capable of supporting 100 lbs.

Ducted Option Specifications

- For outside ventilation.
- Exhaust Duct Required - 6" round
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- Refer to installation instructions on web for detailed exhaust duct preparation and converting vent blower system for recirculating inside.

Note: For planning purposes only. Refer to *Product Installation Guide* on the web at frigidaire.com for detailed instructions.

Optional Accessories

- Duct-Free Recirculation Kit - (PN # FHWRT60LS).
- 10' Flue Extension Kit - (PN # FHW10X60LS).

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-3352 • frigidaire.ca

FWWC3660L 02/12

© 2012 Electrolux Home Products, Inc.

Accessories information available on the web at frigidaire.com



Specifications subject to change.