

KitchenAid® 30" (76.2 cm) AND 36" (91.4 cm) ELECTRIC INDUCTION COOKTOP

PRODUCT MODEL NUMBERS

KICU509X

KICU569X

ELECTRICAL REQUIREMENTS:

Before You Make the Electrical Connection:


To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- A 4-wire or 3-wire, single phase, 240 volt, 60 Hz., AC only electrical supply is required on a separate, 50-amp circuit (36" [91.4 cm] models) or 40-amp circuit (30" [76.2 cm] models), fused on both sides of the line.
- The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.
- Locate the junction box to allow as much slack as possible between the junction box and the cooktop so that the cooktop can be moved if servicing becomes necessary in the future.
- Do not cut the conduit. The length of conduit provided is for serviceability of the cooktop.
- A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.
- If the house has aluminum wiring, follow the procedure below:
 1. Connect a section of solid copper wire to the pigtail leads.
 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.


PRODUCT DIMENSIONS

30" (76.2 cm) Cooktop

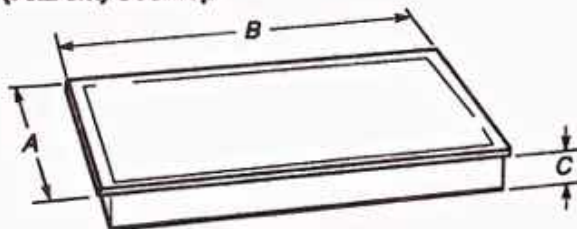

Model JIC4430	Model KICU509
A. 21 $\frac{1}{16}$ " (54.1 cm)	A. 21 $\frac{1}{16}$ " (54.1 cm)
B. 30 $\frac{3}{16}$ " (77.0 cm)	B. 30 $\frac{3}{16}$ " (78.2 cm)
C. 3 $\frac{1}{8}$ " (8.0 cm)	C. 3 $\frac{1}{8}$ " (8.0 cm)

36" (91.4 cm) Cooktop

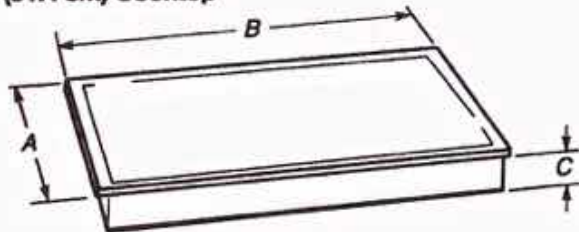


Models JIC4536 and KICU569


- A. 21 $\frac{1}{16}$ " (54.1 cm)
- B. 36 $\frac{1}{16}$ " (92.0 cm)
- C. 3 $\frac{1}{8}$ " (8.0 cm)

CABINET DIMENSIONS

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

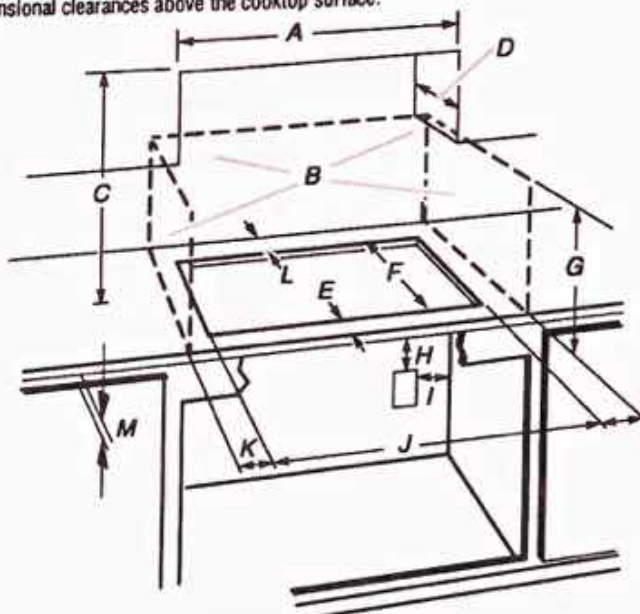

- A. 29 $\frac{1}{2}$ " (75.0 cm) on 30" (76.2 cm) models
33 $\frac{1}{8}$ " (84.0 cm) on 36" (91.4 cm) models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33.0 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 19 $\frac{1}{8}$ " (49.0 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet; 12" (30.5 cm) minimum from bottom of countertop
- I. Junction box or outlet; 10" (25.4 cm) from right-hand side of cabinet
- J. 29 $\frac{1}{2}$ " (75.0 cm) on 30" (76.2 cm) models
33 $\frac{1}{8}$ " (84.0 cm) on 36" (91.4 cm) models
- K. 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1" (2.5 cm) minimum clearance between back wall and countertop
- M. **IMPORTANT:** For proper ventilation, provide a vent of $\frac{3}{16}$ " (5 mm) under the countertop, in the front of the cabinet. The ventilation opening is to extend the full length of the cooktop cutout. See the following illustration.

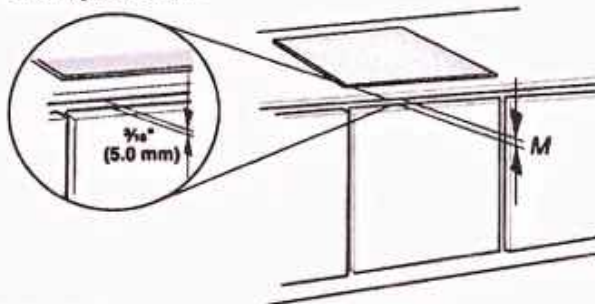

NOTES: After you make the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 5 $\frac{1}{2}$ " (13 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.


FGHB2868T D/F/P/E

Handy

FRENCH DOOR REFRIGERATOR

26.8 CU. FT. STANDARD-DEPTH

Smudge-Proof™
Stainless Steel

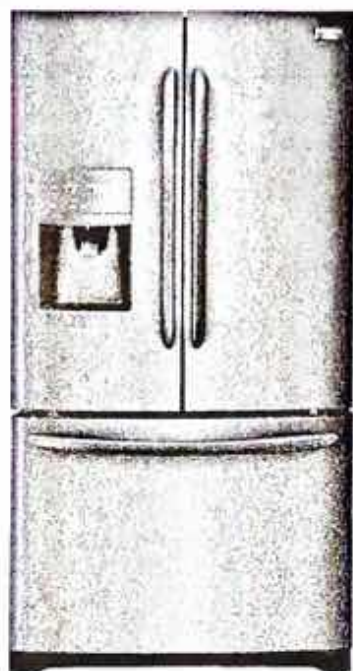

AVAILABLE COLORS



PRODUCT DIMENSIONS

Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	33-3/8"

MORE EASY-TO-USE FEATURES

Even Temp™

Even temperature throughout the refrigerator

Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator.

Store-More™ Flip-Up Shelves

Easily make room for tall or large items.

Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

Store-More™ Shelves

More space to store your food with edge-to-edge shelves.

Full-Width Cool-Zone™ Drawer

A large capacity Cool Zone™ drawer extends completely and provides space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

Express-Select® Controls

Easily select options with the touch of a button.

Freezer Basket with Divider

Deep freezer storage with adjustable divider keeps food organized and accessible.

Effortless™ Glide Freezer Drawers

Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

Quick Freeze

Quickly freeze foods so they stay at their freshest.

Store-More™ Bins

Our bins are designed to store more, so you can fit gallon size beverages.

SIGNATURE FEATURES



Crisp Seal™

Sealed humidity-controlled crispers maintain moisture for market-fresh produce.



Effortless™ Glide Crisper Drawers

Our humidity-controlled crisper drawers can be configured any number of ways, either side-by-side or stacked on top of each other so you can organize your refrigerator the way you want.



PureSource Ultra® II Ice & Water Filtration

Discover how our genuine filtration works to keep your water cleaner. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.9% of cysts from your household water.



PureAir Ultra® II Filters

Our PureAir Ultra® II air filters effortlessly keep the air in your refrigerator fresh.

CERTIFICATIONS


ENERGY STAR®



Star-K® Certified (Sabbath Mode)

FGB2868T D/F/P/E **FRENCH DOOR REFRIGERATOR** **26.8 CU. FT. STANDARD-DEPTH**

FRIGIDAIRE
GALLERY.

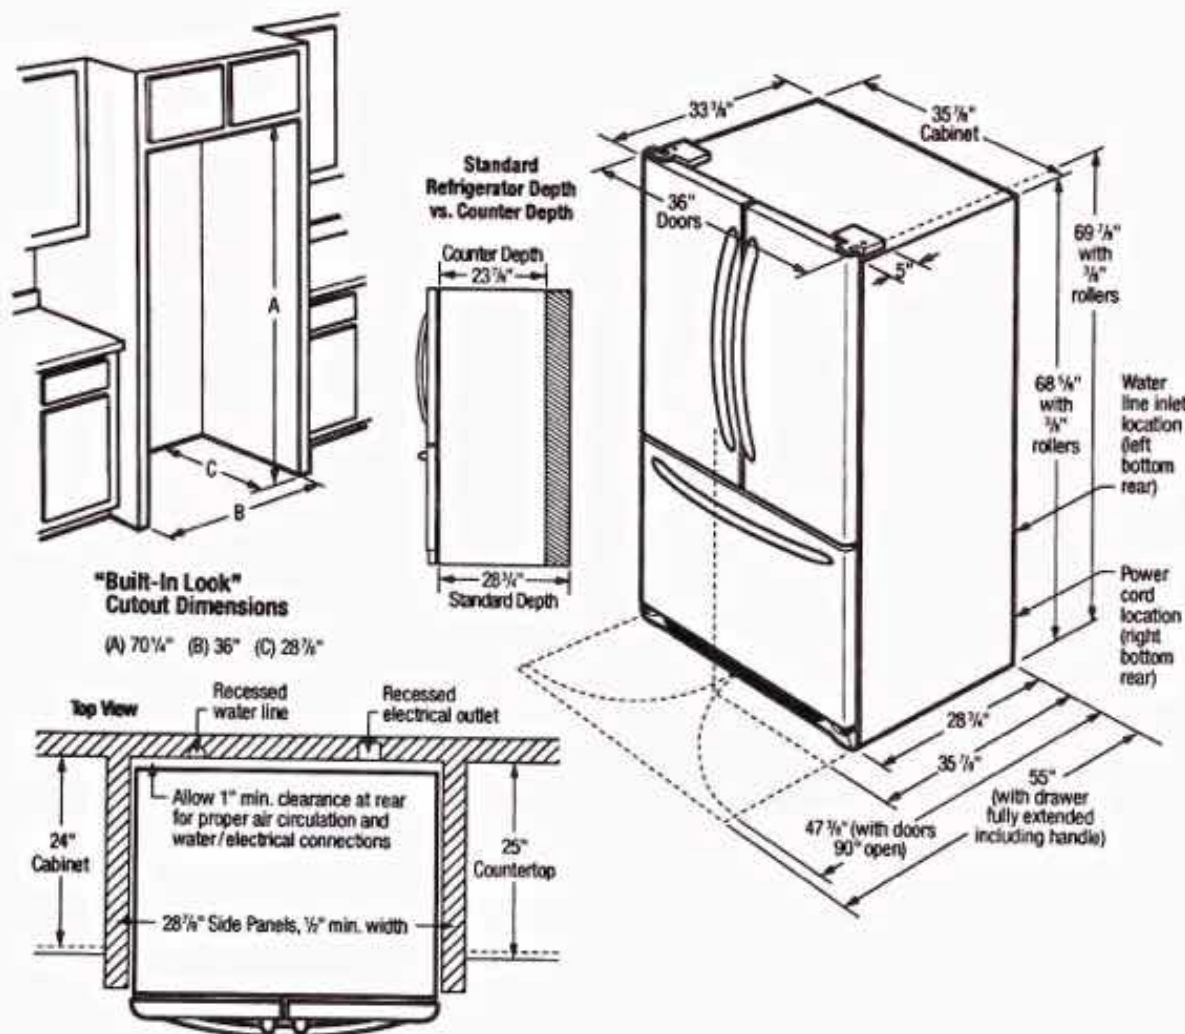

INSTALLATION SPECIFICATIONS

- Product Shipping Weight (approx.) - 365 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NECA 70) and local codes and ordinances.
- Voltage Rating - 120V/60 Hz
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.

- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure - Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"BUILT-IN LOOK" SPECIFICATIONS

- Minimum opening of 70-1/4" H x 36" W x 28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.



FRIGIDAIRE


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca. Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca.

FGB2868T 08/17
 © 2017 Electrolux Home Products, Inc.

Integrated Double DishDrawer™ Dishwasher, Tall, Sanitize


Series 9 | Integrated
Panel Ready

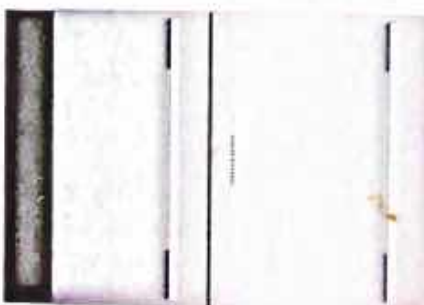

Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory

DIMENSIONS

Height	34 - 36 ³ / ₈ "
Width	23 ⁹ / ₁₆ "
Depth	22 ¹ / ₂ "

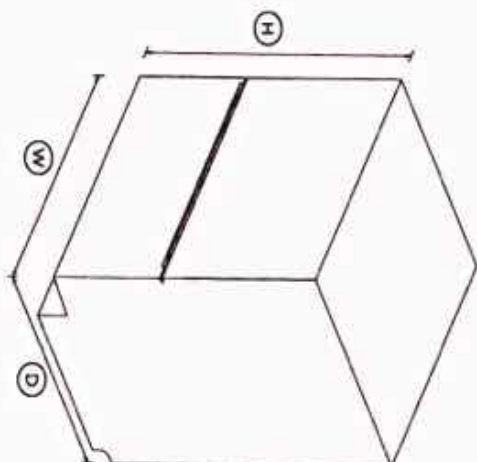

FEATURES & BENEFITS

- Knock to pause function is perfect if you miss a dish
- Six wash programs, as well as additional Quick wash, Sanitize and Extra Dry options
- Flexible racking can be folded down to fit bigger dishes

Doing the dishes got easier. Load one drawer while the other washes – with the top drawer fitting your large dinner plates easily.

Seamless integration
Slide your DishDrawer™ Dishwasher into an existing kitchen space or integrate into kitchen cabinetry, for a seamless look whilst delivering superior dish care.

Ease of use
DishDrawer™ Dishwashers are as easy to open and close as

kitchen drawers and can be conveniently positioned at bench height for ease of loading and minimal bending. Flexible racking allows you to make adjustments to fit in a variety of dishes.

Independent wash
With the ability to use both drawers independently and select different wash programs the DishDrawer™ Dishwasher can wash everything from fine glass and crystal to heavily soiled pots and pans.

True half load
Each drawer holds a true half load for guilt-free small washes and fast turnaround of your dishes. Both drawers operate independently so different wash cycles can run simultaneously to accommodate a variety of loads.

Quick, Sanitize and Extra Dry options
The Quick wash modifier delivers a faster wash while maintaining performance. The Sanitize option provides extra protection killing 99.9% of bacteria in the final rinse. The Extra Dry setting is perfect for plastic dishes.

Knock to pause
Instead of needing a remote control, these DishDrawer™ Dishwashers have a knock to pause function. A knock on the front panel will pause the dishwasher which can be re-started again by using the start/play button.

Quiet performer
Running at a very low decibel rating, these DishDrawer™ Dishwashers do their job without making a fuss. The combination of intelligent technology and simple mechanics means greater reliability and excellent wash performance.

SPECIFICATIONS

Accessories	
Contemporary round handle kit	Part number 81674
Cutlery basket	2
Kickstrip	•

Optional handle 513545 D3 front mount fitting
Optional stainless steel door kit 81261 Doors DD24DT

Capacity and Loading

Accommodates round plates 12,25" (top) - 11" (bottom)
Adjustable height, foldable
Fold down times
Pitch adjustable times
Place settings 14

Consumption

Energy star rating
Energy usage 263kWh/year
Water usage 3,28 gal running both tubs

Controls

Child lock
Electronic fault/Diagnostic
End of cycle beeps
Energy saving delay start
Internal wash selector
Knock to pause
Rinse aid indicator light

Features

Fan assisted drying
Flow through detergent
Quiet operation
SmartDrive™ technology

Performance

Noise on gentle cycle top 44

Power requirements

Amperage 9,6A
Electric circuit 3
Rated current 15A
Supply frequency 60Hz
Supply voltage 120V

Product dimensions

Depth 22 1/2"
Height 34 - 36 3/8"
Width 23 9/16"

Warranty

Parts and labor Limited 2 Year Parts & Labor

Wash Programs

Delicate
Eco
Extra Dry
Fast
Heavy
Medium
Number of wash programs 15
Quick
Rinse
Sanitize

Wash modifiers 3

Water connection

Inlet water temperature Max 140°F
Supplied hose to suit 3/8"
Water pressure 0,03 Mpa - 1 Mpa (4,3-145 psi)

SKU 81217

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2019.

TA's Unique
Protection Plans

Builder & Designer
Programs

Price Match
Promise

TA's Loyalty
Program


Home / Electric Ranges / Single Wall Electric Oven / Bertazzoni MASCS30X



30 Convection Steam Oven Stainless Steel

BER:MASCS30X

11 available in clearance, contact us for details

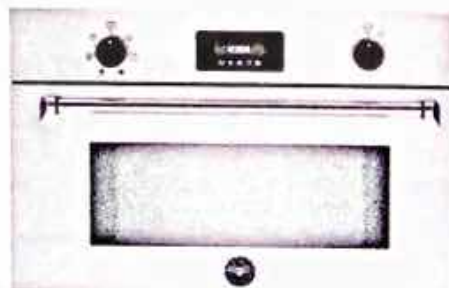

Quick Specs

- Type: Single Wall Oven
- Style: Built In
- Fuel: Electric
- Built In: Yes
- Width: 29 3/4"
- Height: 13 25/32"
- Depth: 21 17/64"
- Nominal Width: 30"
- Energy Star Rated: No
- Self Clean: No
- Convection: Yes
- First Oven: 1.34 cu. ft.
- Hidden Bake Element: No
- Sabbath Mode: No



Regular Price

Our Price

You Save

~~\$4,299.99~~

\$3,599.99

Delivery & Pickup Options

L9K 0K2 Change Location

QTY

- 1 +

Add to Cart

Share This Item



OVERVIEW SPECS DOCUMENTS DELIVERY WARRANTY

Size	30 in
Oven convection system	single with ring heating element
Overall volume	1.34 ft
Oven levels	2
Cavity finishing	stainless steel

SPECIALTY OVEN FEATURES

Size	30 in
Functions	broil / convection / convection broil / steam / steam convection / warming
Overall volume	1.34 ft
Oven convection system	single with ring heating element
Inner oven door	double
Removable inner glass	yes
Cavity finishing	stainless steel
Oven levels	2
Tray	1 stainless steel 40 mm deep
Grill trivet for tray	yes
Oven lights	single

TECHNICAL SPECIFICATIONS

Electrical requirements	208/240 V - 60 Hz - 15 A
Power rating	3300 W

QUICK SPECS

Appearance

Type: Single Wall Oven
 Style: Built In
 Fuel: Electric
 Built In: Yes

Dimensions

Width: 29 3/4"
 Height: 13 25/32"
 Depth: 21 17/64"

Size

Nominal Width: 30"

Energy Star Rated: No

Oven Features

Self Clean: No

Convection: Yes

First Oven: 1.34 cu. ft.

Hidden Bake Element: No

Extras

Sabbath Mode: No

WIFI Connected: No

MATCHING ITEMS

LIMITED STOCK



LIMITED STOCK



30 Single Convection Oven with Assistant Stainless Steel

Bertazzoni MASFS30XT

Our Price

\$2,399.99

[See Details](#)



36 Drop-In Low Profile 6 Burners Stainless Steel

Bertazzoni QB36M600X

Our Price

\$1,299.99

[See Details](#)

CONTACT US

Barrie Showroom
42 Caplan Ave.
Barrie, ON L4N 0M5

Brantford Showroom
195 Henry St.
Brantford, ON N3S 5C9

STAY CONNECTED




CUSTOMER SERVICE

[Contact Us](#)
[My Account](#)
[Privacy Policy](#)
[Terms of Service](#)




Steam oven

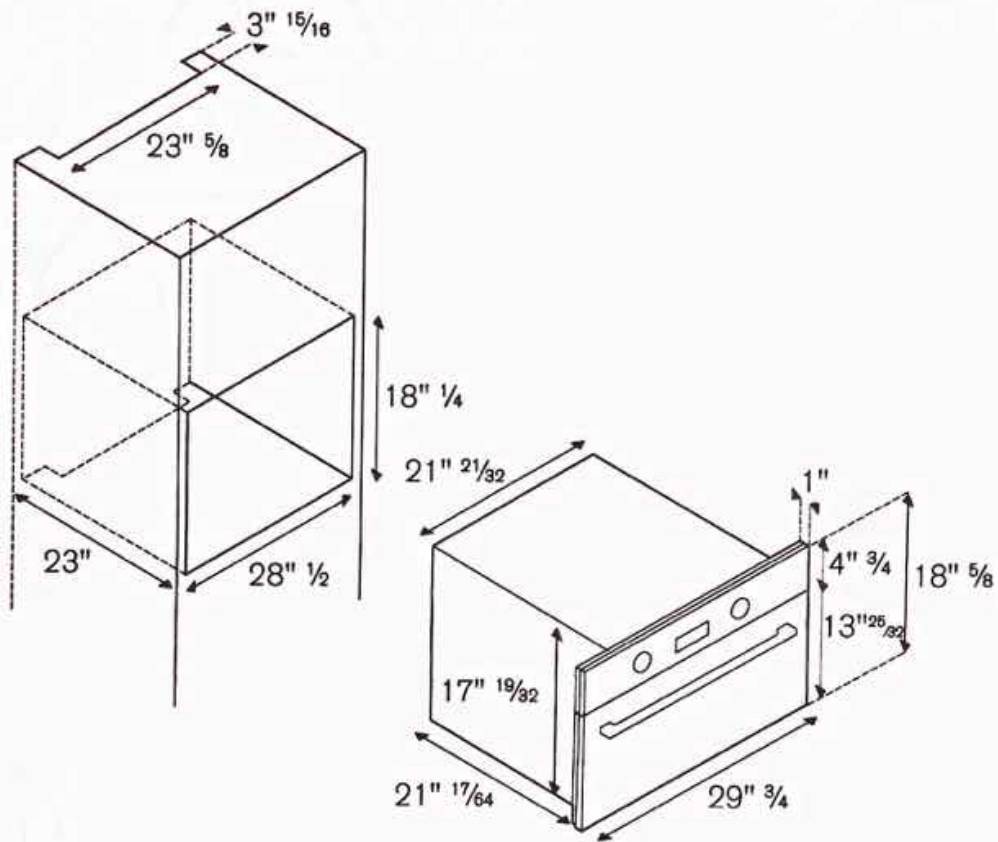


BUILT-IN COMBINATIONS INSTALLATION DRAWINGS

30 Speed Oven
or 30 Convection Steam Oven
30 Single Oven
30 Warming Drawer

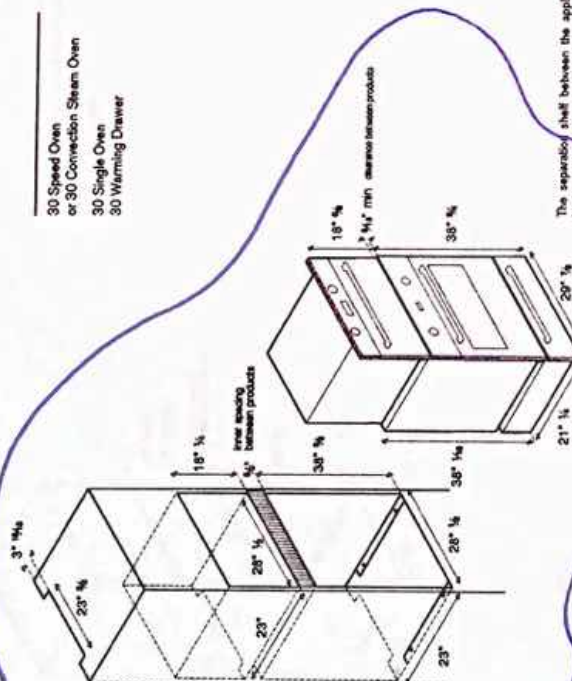


The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"

30 Speed Oven
or 30 Convection Steam Oven
30 Single Oven

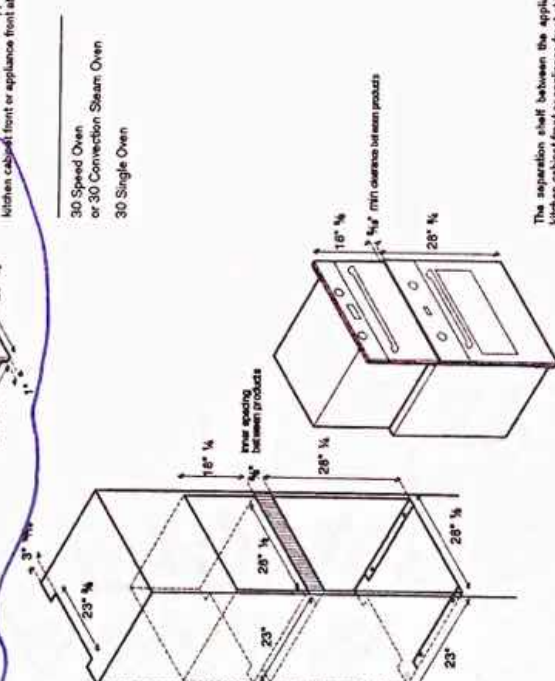


The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"

30 Double Oven
30 Warming Drawer

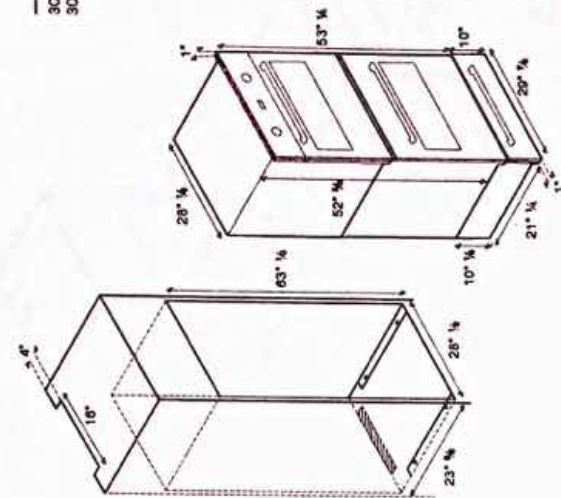

The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"


24 Speed Oven
24 Single Oven

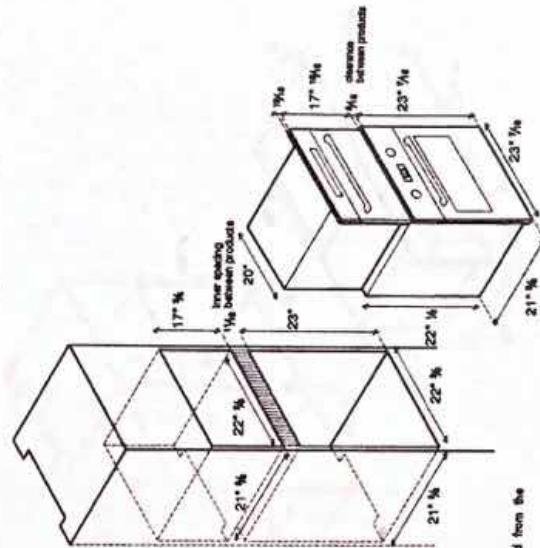

The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"


BUILT-IN COMBINATIONS

30 Microwave Oven with frame FR30 PRO X
30 Single Oven
30 Warming Drawer

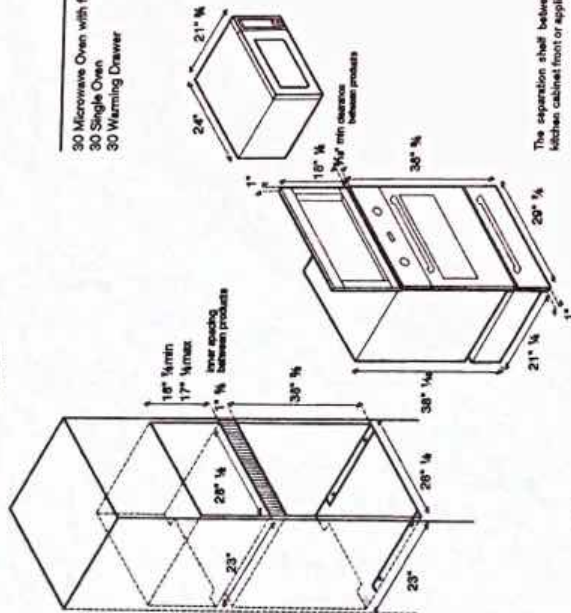


The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"

30 Microwave Oven with frame FRH30 PRO X
30 Single Oven
30 Warming Drawer

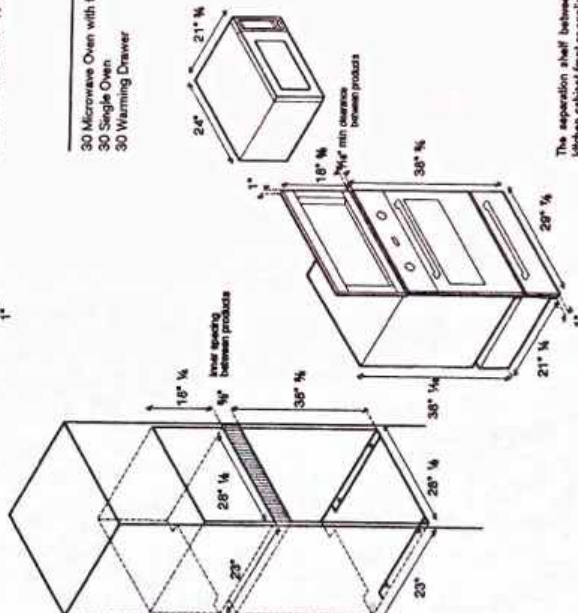


The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1"

30 Speed Oven	30 Convection Steam Oven
30 Warming Drawer	30 Warming Drawer

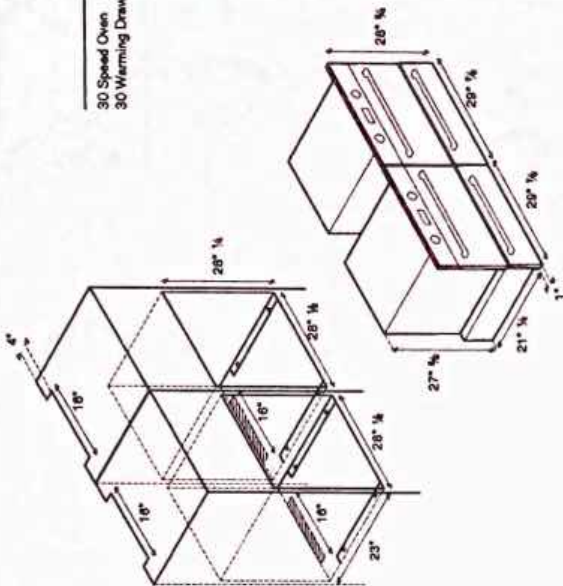

The separation shelf between the appliances must be recessed from the kitchen cabinet front or appliance front at least by 1".


30 Speed Oven	30 Single Oven
30 Warming Drawer	

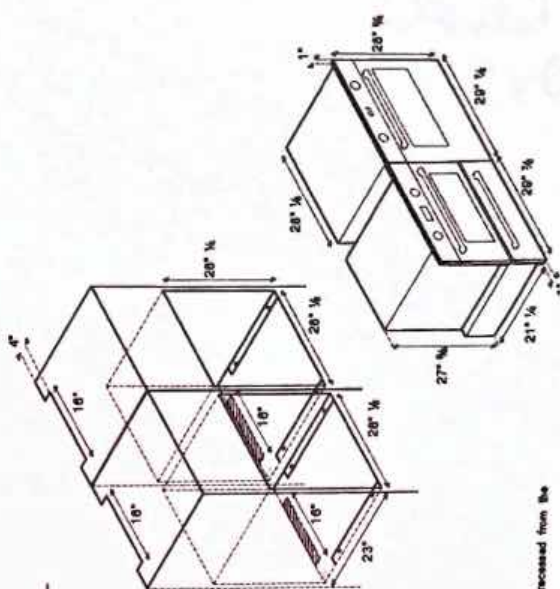

The separation shall between the appliances must be recessed from the kitchen cabinets front or appliance front at least by 1".

Steam
oven

ser
]

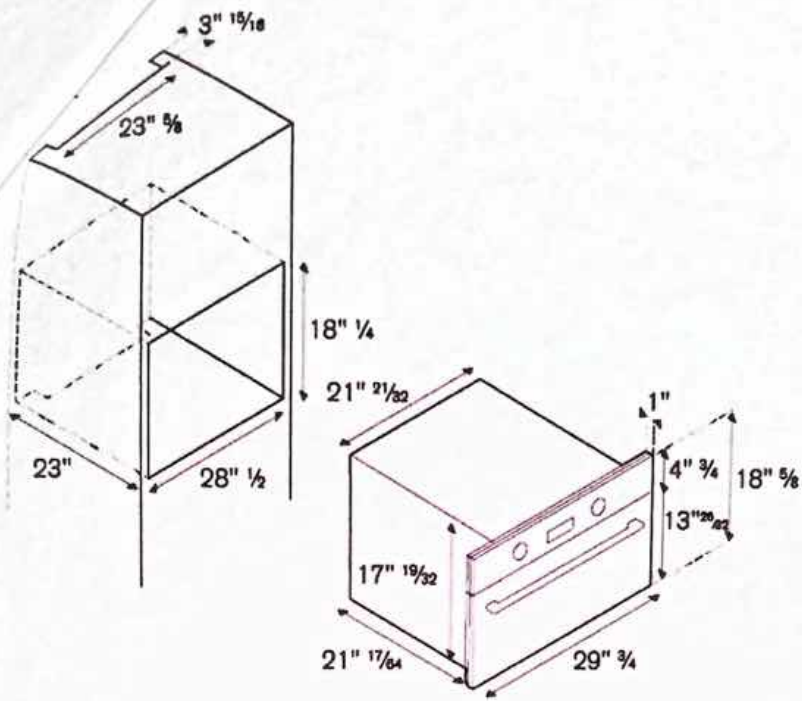



Search Keyword/Model #

warming drawer



TA's Unique
Protection Plans

Builder & Designer
Programs

Price Match
Promise

TA's Loyalty
Program

Home / Electric Ranges / Warming Drawers (electric) / Bertazzoni MASWD30X


FLOOR MODEL



30 Warming Drawer Stainless Steel


BER:MASWD30X

1 available in clearance, contact us for details

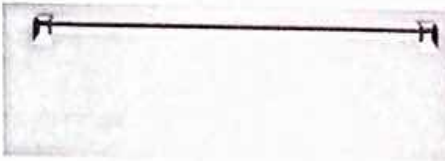

Quick Specs

- **Type:** Warming Drawers
- **Style:** Built In
- **Fuel:** Electric
- **Built In:** Yes
- **Width:** 29 7/8"
- **Height:** 10 3/64"
- **Depth:** 21 1/4"
- **Nominal Width:** 30"
- **Energy Star Rated:** No
- **Sabbath Mode:** No



Regular Price

\$1,809.99

Our Price

You Save

Delivery & Pickup Options

L9K 0K2 Change Location

QTY

-

1

+

Add to Cart

Share This Item

OVERVIEW

SPECS

DOCUMENTS

DELIVERY

WARRANTY

Size

30 in

Design

stainless steel

Equipment

thermostat light on/off

SPECIALTY OVEN FEATURES

Size

30 in

Design

stainless steel

Equipment

thermostat light on/off

Temperature range

185 Fahrenheit

TECHNICAL SPECIFICATIONS

Electrical requirements

120 V - 60 Hz - 10 A

Power rating

400 W

QUICK SPECS

Appearance

Type: Warming Drawers

Style: Built In

Fuel: Electric

Built In: Yes

Dimensions

Width: 29 7/8"

Height: 10 3/64"

Depth: 21 1/4"

Size

Nominal Width: 30"

Features

Energy Star Rated: No


Extras

Sabbath Mode: No

WiFi Connected: No

MATCHING ITEMS

LIMITED STOCK



30 Single Convection Oven with Assistant Stainless Steel

Bertazzoni MASFS30XT

Our Price
\$2,399.99

[See Details](#)



36 Drop-In Low Profile 6 Burners Stainless Steel

Bertazzoni QB36M600X

Our Price
\$1,299.99

[See Details](#)

CONTACT US

Barrie Showroom

42 Caplan Ave.
Barrie, ON L4N 0M5

705-719-1390

jstavroff@taappliance.com

Kitchener Showroom

932 Victoria ST. N
Kitchener, ON N2B 1W4

519-578-0300

cproper@taappliance.com

Toronto Clearance Outlet

24 Arrow Road
Toronto, ON M9M 2L7

416-740-2677

vlombardo@taappliance.com

Brantford Showroom

195 Henry St.
Brantford, ON N3S 5C9

519-750-1118

kruthig@taappliance.com

Mississauga Showroom

1655 Dundas Street East Unit B
Mississauga, ON L4X 1L5

289-814-4415

kknight@taappliance.com

Kitchener Clearance Outlet

960 Victoria ST. N
Kitchener, ON N2B 1W4

226-666-9675

imcleod@taappliance.com

STAY CONNECTED



CUSTOMER SERVICE

[Contact Us](#)

[My Account](#)

[Privacy Policy](#)


[Terms of Service](#)

[Site Map](#)

[Do Not Sell My Personal Information](#)

Welcome to our website! As we have the ability to list over one million items on our website (our selection changes all of the time), it is not feasible for a company our size to record and playback the descriptions on every item on our website. However, if you have a disability we are here to help you. Please call our disability services phone line at 800-303-7550 during regular business hours and one of our kind and friendly personal shoppers will help you navigate through our website, help conduct advanced searches, help you choose the item you are looking for with the specifications you are seeking, read you the specifications of any item and consult with you about the products themselves. There is no charge for the help of this personal shopper for anyone with a disability. Finally, your personal shopper will explain our Privacy Policy and Terms of Service, and help you place an order if you so desire.

Warming
drawer

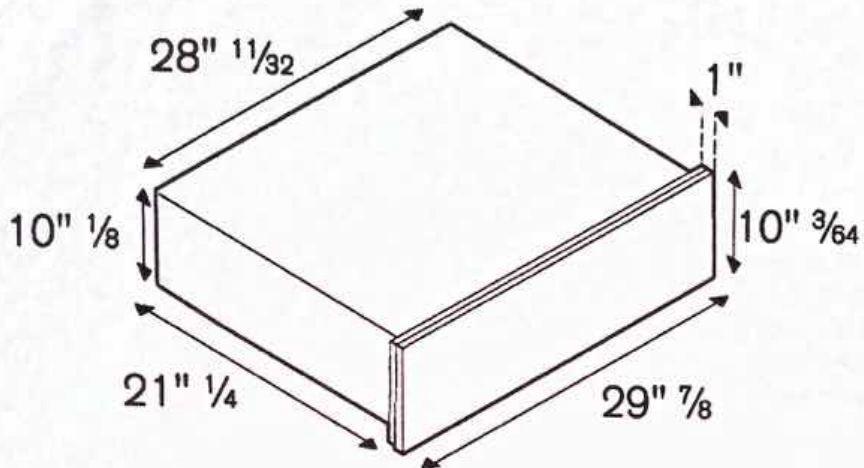

BERTAZZONI MASTER SERIES

30 CONVECTION SELF-CLEAN SINGLE OVEN MASFS30XV

HIGHLIGHTS

- Bertazzoni ovens use stainless steel metal knobs to select cooking modes and temperature, while the intuitive interface lets users program time and other functions.
- Two large-blade fans positioned on the diagonal axis and subsidiary air vents at the top and bottom of the oven cavity provide balanced airflow and even heat distribution.
- All Bertazzoni ovens install flush with the cabinet doors and integrate seamlessly with specialty ovens and warming drawers in both vertical and horizontal combinations.

FEATURES

Oven type	electric convection self-clean
Oven broiler type	electric
Oven controls	LED touch interface
Inner oven door	quadruple glass
Door Hinge	soft motion
Oven handle	solid metal
Oven door finishing	stainless steel
Convection System	dual diagonal
Oven levels	7
Wire shelves	2 heavy gauge
Tray	1 baking tray
Grill trivet for Trays	yes

TECHNICAL SPECIFICATIONS

Voltage, frequency	120/208 Vac - 120/240 Vac, 60 Hz
Oven volume	4.1ft ³
Max Amp usage, power rating	30 A - 5500 W
Certification	CSA
Warranty	2 years parts and labor

ACCESSORIES

30 Telescopic Slide Shelf	code TG
---------------------------	---------



TO COOK BEAUTIFULLY
WWW.BERTAZZONI.COM

FUNCTIONS

CONVECTION	BROILER	CONVECTION BROILER	CONVECTION BAKE	BAKE
TURBO	DEFROST DEHYDRATE	PROOFING	SELF CLEAN	WARMING

OVERVIEW

SPECS

DOCUMENTS

DELIVERY

WARRANTY

Size	30 in
Oven type	self-clean
Oven controls	knobs / touch LED display
Timer	touch digital programmer



OVEN CAVITY

Size	30 in
Oven configuration	single
Oven fuel	electric
Oven type	self-clean
Oven broiler type	electric
Oven functions	bake / broiler / convection / convection bake / convection broiler / defrosting / dehydrate / proofing / pyrolytic self clean / turbo / warming
Oven convection system	dual diagonal with heating element
Oven controls	knobs / touch LED display
Inner oven door	quadruple
Removable inner glass	yes
Cavity finishing	pyrolytic grey enamel
Oven handle	metal
Cooling fan	yes
Oven levels	7
Timer	touch digital programmer
Door hinge	soft-motion
Wire-shelves	2 heavy gauge chromed
Tray	1 enamelled
Grill trivet for tray	yes
Oven lights	single

TECHNICAL SPECIFICATIONS

Electrical requirements	120/240 V - 60 Hz - 30 A
Power rating	5500 W

Wall oven

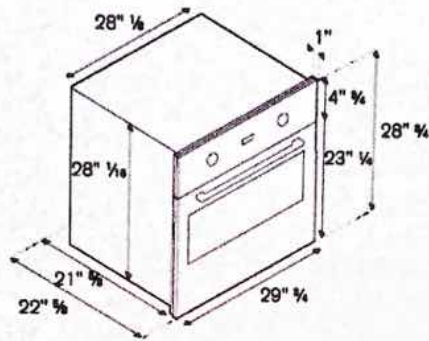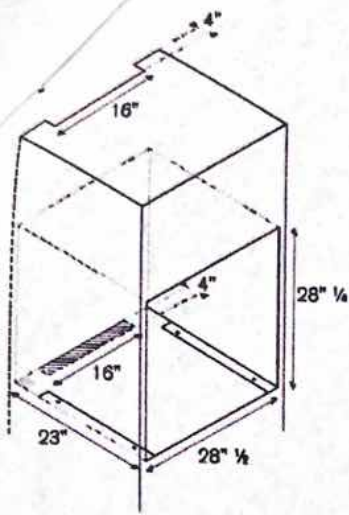



Search Keyword/Model #

Kitchen fridge Q

TA's Unique
Protection Plans

Builder & Designer
Programs

Price Match
Promise

TA's Loyalty
Program

Home / Freezers / Upright Freezers / JennAir JBZFR30IGX

FLOOR MODEL



30" Built-In Freezer Column (Right-Hand Door Swing)

JEN:JBZFR30IGX

Features

- Over 250 Configurations - Freezer or refrigerator. Left-hand or right-hand swing. One, two, three columns in a row. Four different widths. With 12 one-unit options, 75 two-unit combinations and over 250 three-unit combinations, configuration is where bespoke begins.
- Divinity Freezing - One provocative air tower. Two precision sensors. Calibrated every second. United, they keep freezer temperatures from swinging and spirits impeccably chilled.
- Remote Access - Open door. Power outages. Filter changes. Connect to WiFi for real-time notifications and control your columns from anywhere. Tap and swipe on both iOS and Android devices. 1 1 Appliance must be set to remote enable. WiFi & app required. Features subject to change. For details and privacy statement, visit jennair.com/connect.
- Ecliptic Lighting - Live beyond the shadow. Abandoning the dark spots cast by dated puck lighting, over 650 LEDs frame and fill your column, coming alive at a touch of the controls. Each zone awakens and pulses as you mold your column to your desires.

Quick Specs

- **Type:** Freezer
- **Style:** Upright
- **Width:** 29 3/4"
- **Height:** 84"
- **Depth:** 27 1/8"
- **Energy Star Rated:** No
- **Refrigerator Size:** 17 (cu. ft.)

[See More](#)

Call for Our Best Price

Enter Postal Code *

For delivery options and item availability.

QTY

1

Request Quote

Share This Item

Print

Kitchen ~~Model~~ freezer







18" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

17 $\frac{3}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{11}{16}$ " (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Base Unit (Panel Ready)	Base Unit+Stainless Panel Kits			
	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column freezer JBZFR18IGX, JBZFL18IGX, ALOVE18FLC				
	LH: JKCPL181GL, RH: JKCPR181GL	LH: JKCPL181GM, RH: JKCPR181GM	LH: JKCPL181GS, RH: JKCPR181GS	LH: JKCPL181GP, RH: JKCPR181GP

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity - One handle per kit

EURO-STYLE HANDLE KIT COLUMNS

- W11220300
- For use with Custom Overlay panels
- Quantity - One handle per kit

NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity - One handle per kit

PRO-STYLE® HANDLE KIT COLUMNS

- W11220299
- For use with Custom Overlay panels
- Quantity - One handle per kit

JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

			
Handle-to-handle join kit (JAJ13HSS)	Handle-to-hinge join kit (JAJ11HSS)	Hinge-to-handle join kit (JAJ12HSS)	Burlesque Handle-to-handle join kit (JAJ14JSS)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

WT1356522C




18" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

17 $\frac{3}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{1}{16}$ " (Depth without door panels/handles)

PRODUCT DIMENSIONS

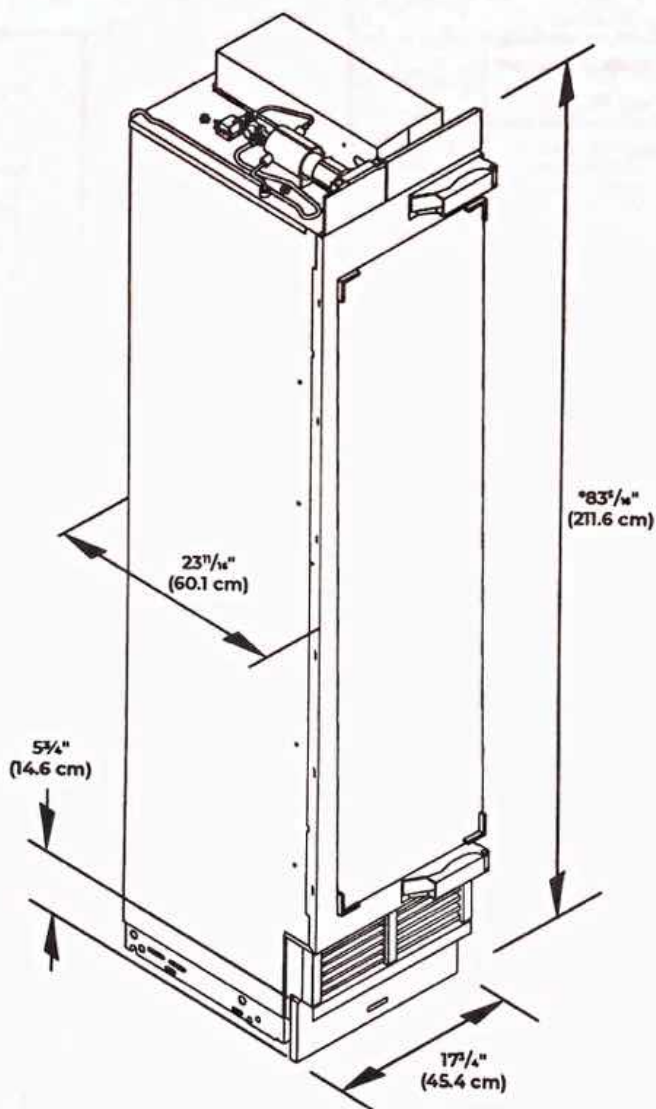

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




18" COLUMN REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

17 $\frac{3}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{1}{16}$ " (Depth without door panels/handles)

PRODUCT DIMENSIONS

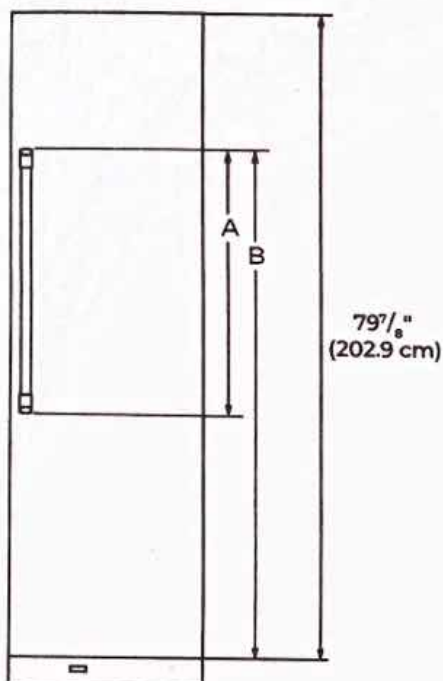

FRONT VIEW

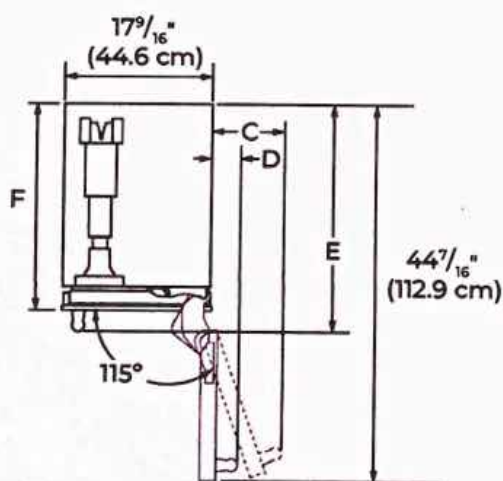

TOP VIEW

DIMENSION	DESCRIPTION	JBZFR18IGX, JBZFL18IGX, ALOVE18FLC
A	Height of door handle	
	RISE™ Stainless	57 $\frac{15}{16}$ " (147.2 cm)
	NOIR™ Stainless	40 $\frac{5}{8}$ " (103.2 cm)
	Euro-Style Stainless	50 $\frac{1}{16}$ " (127.1 cm)
	Pro-Style® Stainless	45 $\frac{9}{16}$ " (115.7 cm)
	Custom panel (3/4" thick)	** **
B	Height to top of door handle	
	RISE™ Stainless	70 $\frac{3}{4}$ " (179.7 cm)
	NOIR™ Stainless	68 $\frac{1}{16}$ " (174.5 cm)
	Euro-Style Stainless	68 $\frac{5}{16}$ " (173.4 cm)
	Pro-Style® Stainless	66 $\frac{1}{16}$ " (167.7 cm)
	Custom panel (3/4" thick)	** **
C	Width from side of freezer to handle – door fully open 115°	10 $\frac{1}{2}$ " (26.7 cm)
D	Width from side of freezer to handle – door open 90°	5" (12.7 cm)
E	Depth with handle	
	RISE™ Stainless	26 $\frac{5}{8}$ " (67.7 cm)
	NOIR™ Stainless	26 $\frac{9}{16}$ " (67.5 cm)
	Euro-Style Stainless	26 $\frac{1}{16}$ " (67.4 cm)
	Pro-Style® Stainless	27 $\frac{1}{8}$ " (68.9 cm)
	Custom panel (3/4" thick)	** **
F	Depth with door	24 $\frac{1}{2}$ " (62.2 cm)

**For custom panel models, this depends on handle chosen.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




18" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

17 $\frac{1}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{1}{16}$ " (Depth without door panels/handles)

OPENING DIMENSIONS

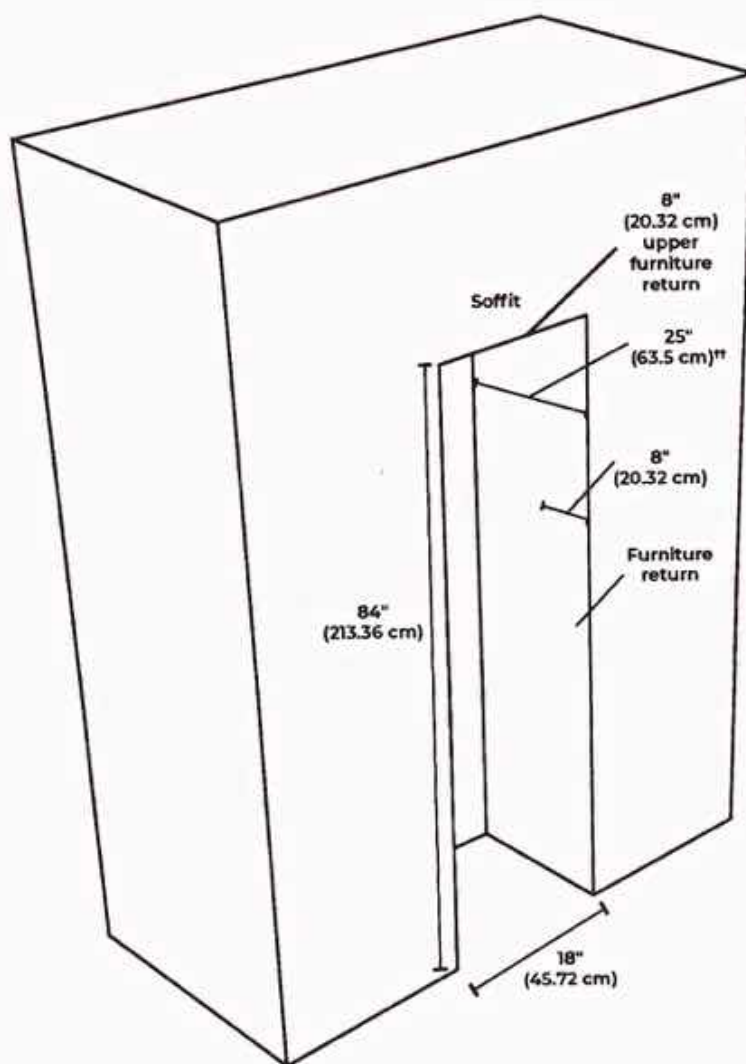

H24* with 24* trim kit.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



18" COLUMN REFRIGERTOR


DETAILED PLANNING DIMENSIONS GUIDE

JBZFR18IGX, JBZFL18IGX and ALOVE18FLC

17 $\frac{3}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{11}{16}$ " (Depth without door panels/handles)



TOP VIEW - CABINET OPENING

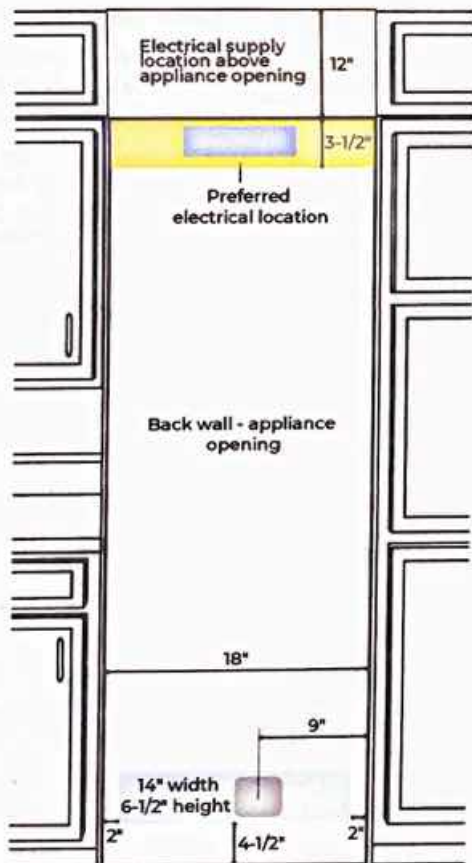

water supply location behind unit
(also approved for electrical supply)

FRONT VIEW - CABINET OPENING

ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3 $\frac{1}{2}$ " of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

FLOOR WATER SUPPLY LOCATIONS

- There is no floor access through an 18" unit.

Kitchen fridge







30" COLUMN REFRIGTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29 3/4" (W) x 83 7/16" (H) x 23 11/16" (Depth without door panels/handles)

Choose one of following configuration to match your kitchen design.

Base Unit (Panel Ready)	Base Unit+Stainless Panel Kits			
	RISE™ Stainless Panel	NOIR™ Stainless	Euro-Style Stainless Panel	Pro-Style® Stainless Steel Panel
Column freezer JBZFR30IGX, JBZFL30IGX				
	LH: JKCPL30IGL, RH: JKCPR30IGL	LH: JKCPL30IGM, RH: JKCPR30IGM	LH: JKCPL30IGS, RH: JKCPR30IGS	LH: JKCPL30IGP, RH: JKCPR30IGP

OPTIONAL ACCESSORIES FOR CUSTOM OVERLAY DESIGNS

RISE™ STAINLESS HANDLE KIT

- W11220303
- For use with Custom Overlay panels
- Quantity - One handle per kit

EURO-STYLE HANDLE KIT COLUMNS

- W11220300
- For use with Custom Overlay panels
- Quantity - One handle per kit





NOIR™ STAINLESS HANDLE KIT

- W11220302
- For use with Custom Overlay panels
- Quantity - One handle per kit

PRO-STYLE® HANDLE KIT COLUMNS

- W11220299
- For use with Custom Overlay panels
- Quantity - One handle per kit

JOIN KITS (FOR MULTIPLE UNIT INSTALLATIONS)

 <p>Handle-to-handle join kit (JAJ13HSS)</p>	 <p>Handle-to-hinge join kit (JAJ11HSS)</p>	 <p>Hinge-to-handle join kit (JAJ12HSS)</p>	 <p>Burlesque Handle-to-handle join kit (JAJ14JSS)</p>
---	--	---	---

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29³/₄" (W) x 83⁷/₁₆" (H) x 23¹¹/₁₆" (Depth without door panels/handles)

PRODUCT DIMENSIONS

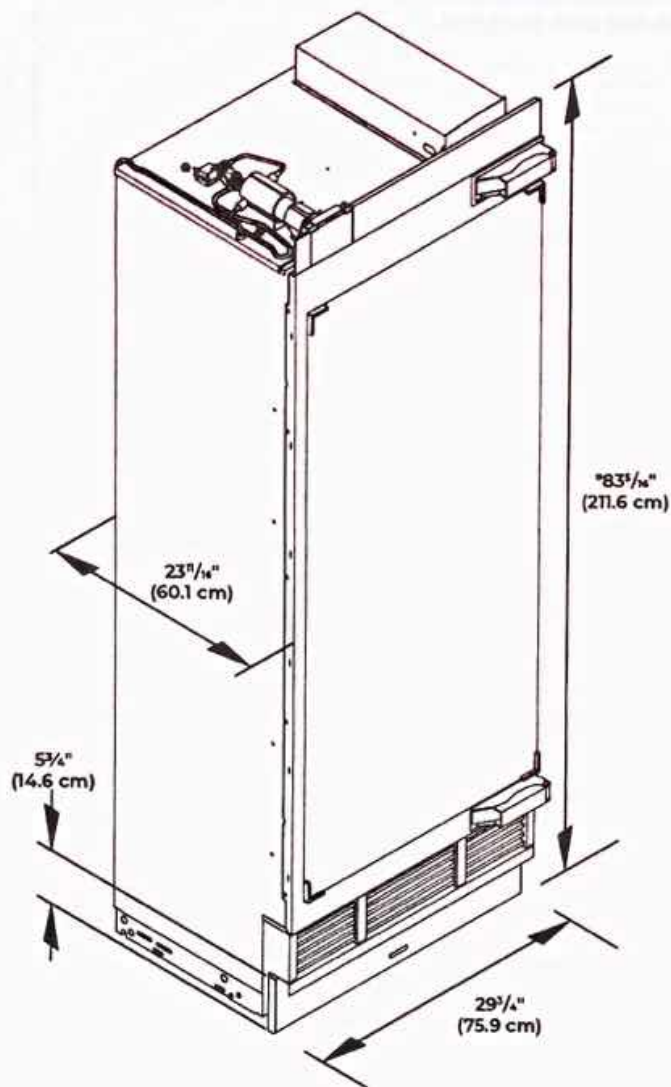

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




30" COLUMN REFRIGERATOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR30IGX, JBZFL30IGX

29 3/4" (W) x 83 7/16" (H) x 23 11/16" (Depth without door panels/handles)

PRODUCT DIMENSIONS

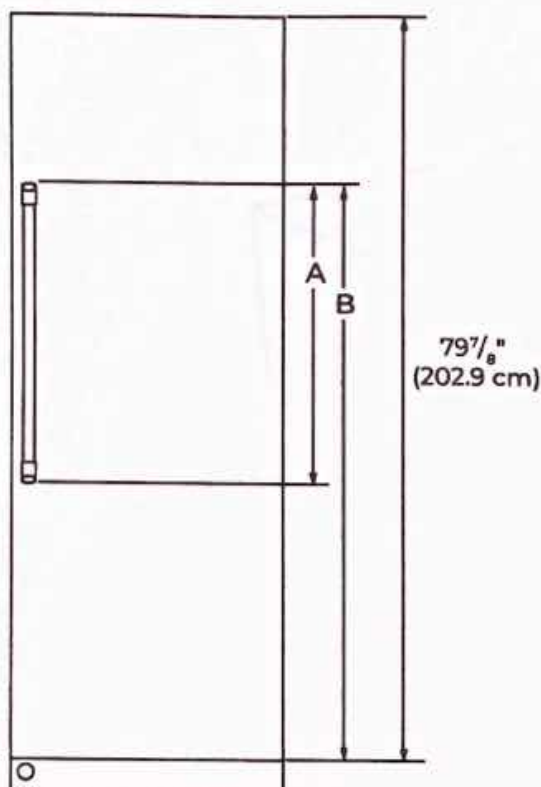

FRONT VIEW

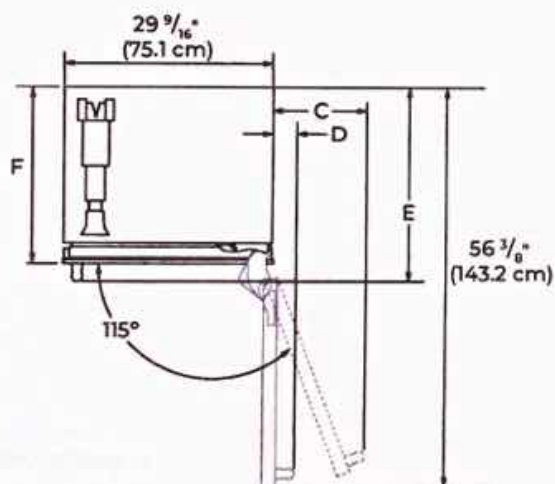

TOP VIEW

DIMENSION	DESCRIPTION	JBZFR30IGX JBZFL30IGX
A	Height of door handle	
	RISE™ Stainless	57 15/16" (147.2 cm)
	NOIR™ Stainless	40 5/8" (103.2 cm)
	Euro-Style Stainless	50 1/16" (127.1 cm)
	Pro-Style® Stainless	45 9/16" (115.7 cm)
	Custom panel (3/4" thick)	** **
B	Height to top of door handle	
	RISE™ Stainless	70 3/4" (179.7 cm)
	NOIR™ Stainless	68 1 1/16" (174.5 cm)
	Euro-Style Stainless	68 9/16" (173.4 cm)
	Pro-Style® Stainless	66 1/16" (167.7 cm)
	Custom panel (3/4" thick)	** **
C	Width from side of freezer to handle – door fully open 115°	15 1/2" (39.4 cm)
D	Width from side of freezer to handle – door open 90°	5" (12.7 cm)
E	Depth with handle	
	RISE™ Stainless	26 5/8" (67.7 cm)
	NOIR™ Stainless	26 9/16" (67.5 cm)
	Euro-Style Stainless	26 3/16" (67.4 cm)
	Pro-Style® Stainless	27 1/8" (68.9 cm)
	Custom panel (3/4" thick)	** **
F	Depth with door	24 1/2" (62.2 cm)

**For custom panel models, this depends on handle chosen.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29 3/4" (W) x 83 7/16" (H) x 23 11/16" (Depth without door panels/handles)

OPENING DIMENSIONS

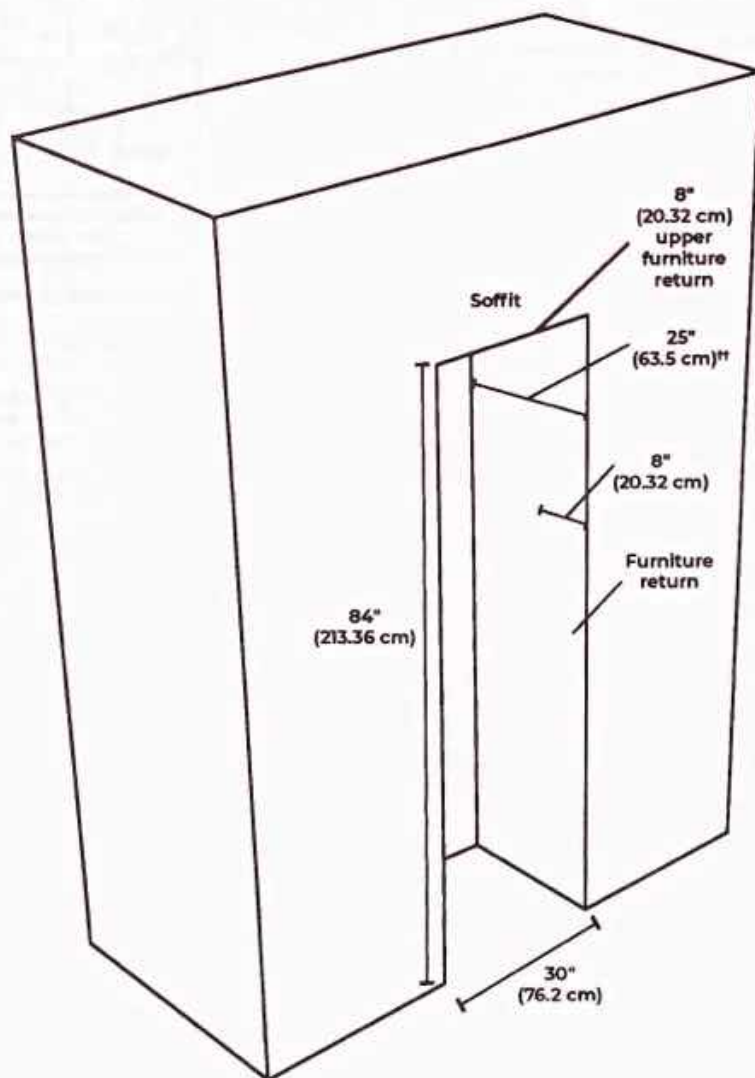

***24" with 24" trim kit.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE


JBZFR30IGX, JBZFL30IGX

29 3/4" (W) x 83 7/16" (H) x 23 11/16" (Depth without door panels/handles)



water supply location
under unit
(accessible behind air grille)

TOP VIEW - CABINET OPENING

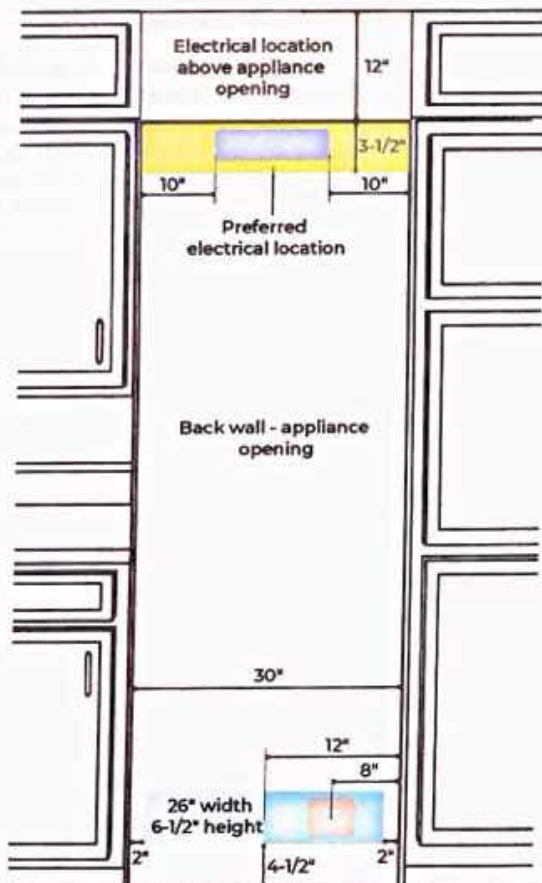

water supply location behind unit
(also approved for electrical supply)

FRONT VIEW - CABINET OPENING

ELECTRICAL SUPPLY LOCATION

- Lighter yellow area indicates electrical supply located in a cabinet or accessible space above the unit opening.
- Power cord length is 9ft and originates from the front right corner of the unit.
- There is room for a surface mount electrical outlets within the top 3 1/2" of the opening.
- Darker yellow area indicates the electrical supply location within the top of the opening.
- Outlet should be located near the center of the allowable area for easy connection and disconnection after installation.

WALL WATER SUPPLY LOCATIONS

- Water outlet area shown in blue.
- Water outlet area is also approved for the electrical outlet location.
- Outlet area width and height corresponds to a 3/4" deep recessed area found on the back of all unit.
- Targeting the left side of the allowable area allows for additional water line routing flexibility and easier water line management under the unit.

FLOOR WATER SUPPLY LOCATIONS

- Floor access is available through the open space behind the air grille.
- The area available is shown in blue and is limited in size by the compressor compartment on the right and leveling assembly on the left.
- The height of the open space above the access area is 11" high which makes drilling water lines access holes through floor after installation possible.




30" COLUMN REFRIGERTOR

DETAILED PLANNING DIMENSIONS GUIDE

JBZFR30IGX, JBZFL30IGX

29 $\frac{3}{4}$ " (W) x 83 $\frac{7}{16}$ " (H) x 23 $\frac{11}{16}$ " (Depth without door panels/handles)

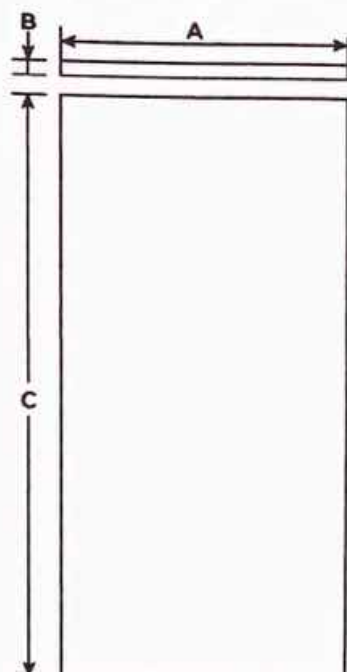

FRONT VIEW

Thickness (B)	3/4" (1.9 cm) max.
Weight	60 lbs. (27.2 kg) max.
Height (C)	79 $\frac{7}{8}$ " (202.9 cm)



WOOD PANEL GUIDE

CAUTION

Pinch Hazard

Installation of door panels with less than a $\frac{3}{8}$ " (0.95 cm) gap between the door panel and the adjacent cabinet increases the risk of potential pinching.

MODEL	FLUSH WIDTH (A)
30"	29 $\frac{3}{4}$ " (75.6 cm)

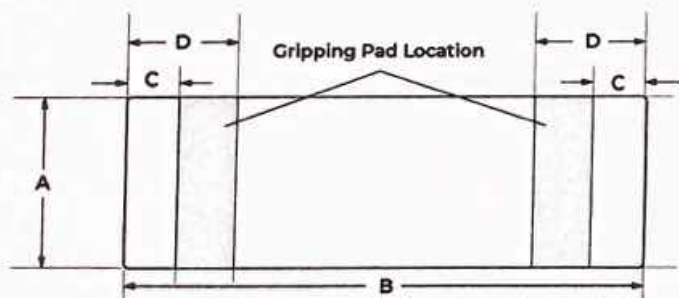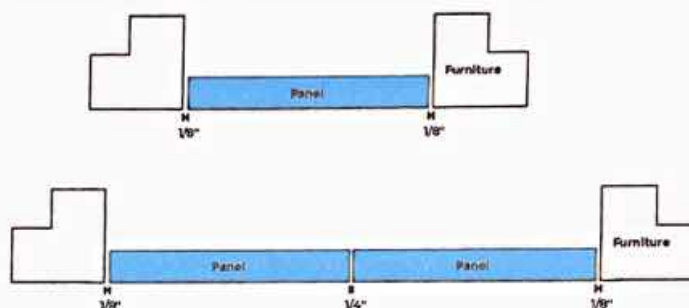

TOE KIT DIMENSIONS

	DIMENSION
A	5 $\frac{3}{4}$ " (14.6 cm)
B	29 $\frac{3}{4}$ " (75.4 cm)
C	1 $\frac{3}{16}$ " (4.5 cm)
D	3 $\frac{3}{4}$ " (9.5 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

LG LAUNDRY

WM3500CW

5.2 cu.ft. Capacity Front Load Washer

2018 ENERGY STAR Most Efficient

ColdWash™ Option

6Motion™ Technology

SmartDiagnosis™

TrueBalance™ Anti-Vibration System

Wi-Fi Connectivity

SmartThinQ® Technology (Wi-Fi Enabled)

Inverter BLDC Pump Motor



Enjoy new ways to control your
home with LG smart appliances

SmartThinQ®

CAPACITY	
Capacity	5.2 cu.ft.
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with Dual LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
2018 Energy Star Most Efficient	•
CEE Tier	3
WASH PROGRAMS	
No. of Programs	10
Wash Programs	Cotton/Normal, Perm. Press, Delicates, Speed Wash, Tub Clean, Bedding, Whites, Heavy Duty, Towels, Download Cycle
No. of Options	11
Options	Prewash, Delay Wash, Extra Rinse, Rinse+Spin, Child Lock, ColdWash™, FreshCare™, Water Plus, Add Garment, Remote Start, Wi-Fi
No. of Wash/Rinse Temps	3
	Hot, Warm, Cold
Spin Speeds	High, Medium, Low
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	3
FABRIC CARE FEATURES	
ColdWash™ Option	•
SenseClean™ System	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
SmartDiagnosis™	•
LoadSense	•
Status Indicator(s)	•
End of Cycle Signal	•
Child Lock	•
Auto Suds Removal	•
Forced Drain System	•
LoDecibel™ Quiet Operation	•
Easy Loading TilTub™	•
Wi-Fi Connectivity	•
Energy Monitoring	•

MOTOR AND AGITATOR

Motor Type	Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal

MATERIALS AND FINISHES

NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted Steel
Door/Rim	Glass / Silver Spray
Available Colours	White (W)

POWER SOURCE

Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric

OPTIONS / ACCESSORIES

Pedestal	WDP4W
Pedestal Dimensions (WxHxD)	27" x 14 1/8" x 28 2/5"
SideKick™ Pedestal Washer	WD100CW
SideKick™ Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 9/16" with door open)
Stacking Kit	KSTK1
Hose Included	No

DIMENSIONS

Product (WxHxD)	27" x 39" x 30 1/4" (51 1/2" D with door open)
Carton (WxHxD)	29 1/2" x 43 5/16" x 31 5/16"
Weight (Product/Carton)	187.4 lbs/209.4 lbs

LIMITED WARRANTY

1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor

UPC CODES

WM3500CW Washer (White)	048231024990
DLE3500W Electric Dryer (White)	048231024983

DLE3500W

7.4 cu.ft. Capacity Electric Dryer

7.4 cu.ft. Ultra Large Capacity

Sensor Dry System

SmartDiagnosis™

ENERGY STAR® Qualified

Wi-Fi Connectivity

SmartThinQ® Technology (Wi-Fi Enabled)



Enjoy new ways to control your home with LG smart appliances

SmartThinQ®

CAPACITY

Capacity 7.4 cu.ft.

APPEARANCE

Design Look Front Control

Intelligent Electronic Controls with Dual LED Display *

Touch Buttons *

Dial-A-Cycle™ *

ENERGY

ENERGY STAR® Qualified *

DRYING PROGRAMS

No. of Programs 10

Programs (Sensor Dry) Normal, Heavy Duty, Bedding, Towels, Small Load, Perm Press, Delicates, Download Programs (Manual Dry) Speed Dry, Air Dry

No. of Options 12

Options More Time, Less Time, Custom Program, Damp Dry Signal, Wrinkle Care, Default On/Off Anti-Bacterial, Energy Saver, Control Lock, PGM Save, Wi-Fi Connect, Remote Start

Temperature Settings High, Medium, Low

Drying Levels Very Dry, Normal Dry, Damp Dry

Manual Dry Times 60 min., 40 min., 20 min., More Time/Less Time

FABRIC CARE FEATURES

Sensor Dry *

Precise Temperature Control and Variable Heater *

CONVENIENCE FEATURES

LoDecibel™ Quiet Operation *

SmartDiagnosis™ *

FlowSense™ Duct Clogging Indicator *

Wrinkle Care Option *

Remaining Time Display/Status Indicator(s) *

End of Cycle Signal *

Child Lock *

Reversible Door *

Leveling Legs 4 Adjustable Legs

Venting Option 4 Way Venting(Electric) / 3 Way Venting(Gas)

3 Minute Installation Check *

Wi-Fi Connectivity *

Energy Monitoring *

MATERIALS AND FINISHES

Aluminized Alloy Steel Drum

Cabinet Painted Steel

Control Panel Plastic

Door/Rim Glass/Silver Spray

Available Colours White (W)

POWER SOURCE

Ratings CSA Listed

Electrical Requirements 240V, 30 Amps(Electric) / 120V, 15 Amps(Gas)

OPTIONS

Pedestal WDP4W

Pedestal Dimensions (WxHxD) 27" x 14 1/8" x 28 2/5"

Stacking Kit KSTK1

DIMENSIONS

Product (WxHxD) 27" x 39" x 30 1/8"

(51 3/8"D with door open)

Carton (WxHxD) 29 7/10" x 43 1/5" x 31 3/10"

Weight (Product/Carton) 122.4 lbs/ 138.9 lbs (Electric)

123.0 lbs/ 139.5 lbs (Gas)

LIMITED WARRANTY

1 Year Parts and Labour

UPC CODES

DLE3500W Electric Dryer (White) 048231024983

DLG3501W Gas Dryer (White) 048231025003

WM3500CW Washer (White) 048231024990