

Lot 94

RM

三才圖會

**81. Quilts: A quilt is a bed covering consisting of three layers: a top layer, a middle layer, and a bottom layer. The top layer is usually made of a decorative fabric, the middle layer is made of a soft, warm material like wool or cotton, and the bottom layer is made of a sturdy, durable fabric. Quilts are often made in a variety of patterns and designs, and they can be used as a decorative element in a bedroom or as a functional piece of furniture.**

[illegible]

14501000 4614

30" Slide-12

14501000 4614



40100000



**Outcome**

**INTERVIEW OF DAVID A. HARRIS**

Downloaded from ascelibrary.org by University of California, San Diego on 06/01/15. Copyright ASCE. For personal use only; all rights reserved.

Concave information

**Big Money**

5

RECEIVED

AUG 12 2020


RM

# INSTALLATION 19

## Dimensions and Clearances


### NOTE

Save for the use of the local electrical inspector.

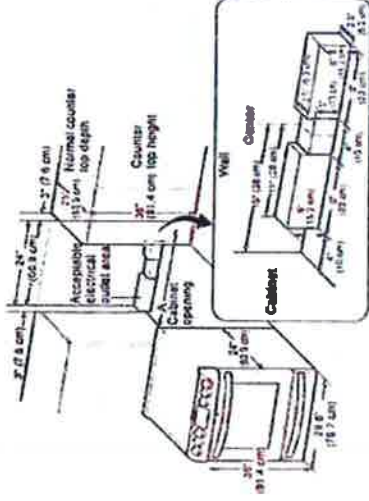

A = 30" (76.2 cm) For U.S.A.  
= 30" (76.2 cm) - 31" (78.7 cm) For CANADA

For installation in Canada, a free-standing range is not to be installed closer than 1/2" (12 mm) from any adjacent surface.



### Minimum Dimensions

• 30" (76.2 cm) minimum clearance between the top of the cooling surface and the bottom of an unprotected wood or metal cabinet, or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/2" (12.4 mm) flame retardant millboard covered with not less than no. 28 MSG sheet metal, 0.015" (0.38 mm) stainless steel, 0.024" (0.61 mm) aluminum or 0.020" (0.51 mm) copper

• 19" (48.1 cm) minimum between countertop and adjacent cabinet bottom.

RECEIVED  
AUG 12 2020





## UNDERSTANDING YOUR MICROWAVE OVEN

Please read this owner's manual. It will tell you how to use all the features of the microwave oven.

### LOCATION OF MODEL NUMBER

To request service information or replacement parts, this service center will require the complete model number of your microwave oven. The number is on the oven front as shown in the illustration below.



MODEL NUMBER LABEL

### OVEN SPECIFICATIONS

|                  |                                |
|------------------|--------------------------------|
| Output Power     | 1,000W (IEC 60705 Standard)    |
| Outer Dimensions | 29 7/8" x 16 7/16" x 15 13/16" |
| Cavity Volume    | 2.0 Cu ft                      |
| Net Weight       | 54.5 lbs.                      |

### ELECTRICAL RATING

- Electrical Rating of the Oven: 120V AC 60Hz
- 13 Amps / 1200 Watts (1800VA • Cooltop Lamp • Ventilation Fan)

### ELECTRICAL REQUIREMENTS

The oven is designed to operate on a standard 120V/60Hz household outlet. Be sure the circuit is at least 15A or 20A and the microwave oven is the only appliance on the circuit. It is not designed for 50Hz or any circuit other than a 120V/60Hz circuit.

### GROUNDING INSTRUCTIONS

This appliance must be grounded. If an electrical short circuit occurs, grounding reduces the risk of electric shock by providing an escape wire for the electric current. The appliance is equipped with a cord having a grounded wire with a grounded plug. Put the plug into an outlet that is properly installed and grounded.

### ⚠ WARNING - If you use the grounding plug improperly, you risk electric shock.

Ask a qualified electrician if you do not understand the grounding instructions or if you wonder whether the appliance is properly grounded.

Because this appliance fits under the cabinet, it has a short power-supply cord. Use the separate installation instructions for directions on placing the cord properly. Keep the electrical power cord dry and do not pinch or crush it in any way.

If it is necessary to use an extension cord, use only a 3-wire extension cord that has a 3-blade grounding plug, and a 3-slot receptacle that will accept the plug on the appliance. The marked rating of the extension cord shall be equal to or greater than the electrical rating of the appliance.



### For a permanently connected appliance:

This appliance must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the appliance.

RECEIVED

AUG 12 2020