

KitchenAid®

1.5 cu. ft. Countertop Microwave
KMCC5015G



Stainless Steel
KMCC5015GSS

Capacity	
Total	1.5 cu. ft.
General Features & Properties	
6 Quick-Touch Cycles Including Five Sensor Cycles	
13 1/2" Recessed Turntable	
1.5 Cu. Ft. Capacity	
Accepts 30- or 27-Inch Trim Kit	
Electronic Controls with LED Display	
Color-Coordinated Stainless Steel Cabinet	
Electrical Details	
Amps	15
Volts	120

Technical Details	
Microwave Type	Countertop
Lighting Type	Incandescent
Dimensions	
Product Dimensions (H x W x D)	12-1/2" x 21-3/4" x 20-1/2"

Reference Material

[Dimension Guide](#)

[Install Guide](#)

[Use & Care Guide](#)

[Warranty](#)

Key Features & Benefits

1400-Watt Convection Element


Circulates heat around the back of the oven to allow convection baking at temperatures up to 425°F.

Roast Function

Helps maintain the balanced heat distribution required for exceptional roasting by alternating traditional microwave cooking with convection cooking to evenly surround food with heat.

Grill Function

Delivers grilling results similar to a conventional oven. A rack that comes with the microwave heats during the grilling process to sear meats and lock in flavor.

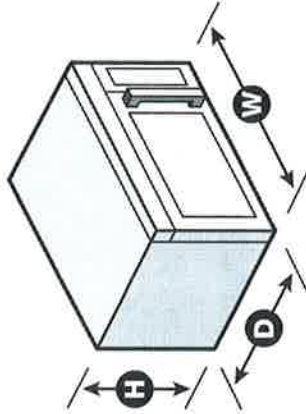

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

©/TM © 2020. All rights reserved. Printed in the U.S.A. D200104XXE. KMCC5015GSpecSheetV01.

RECEIVED

NOV 30 2020



INSTALLATION INSTRUCTIONS

Tools Needed

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

- Measuring tape
- Pencil
- Phillips screwdriver
- Drill
- 7/64" drill bit

Parts Supplied (not shown to scale)


		
Rear duct	Bottom duct	Rails (2)
		
Trim kit frame	Short screws (19) (16 + 3 extra)	Long wood screws (6 - painted) (4 + 2 extra)

Location Requirements

The microwave oven may be installed over a built-in oven. If installing over a built-in oven, make sure there is a minimum of 3" (7.6 cm) between the top of the lower oven cutout and the microwave oven cutout floor.

The microwave oven may also be installed in a cabinet by itself (without a built-in oven below). For best usability, we recommend a minimum distance of 36" (91.4 cm) from the floor to the cutout floor.


Make sure the surrounding cabinetry has clearance to open and close freely. Allow a clearance of at least 1 1/16" (4.0 cm) below the cutout floor (3" [7.6 cm] for installation above a built-in oven), and a clearance of at least 2" (5.1 cm) above the cutout opening.

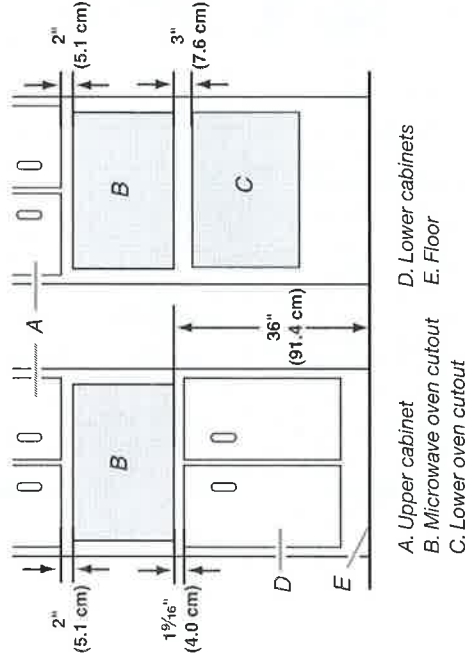

A. Upper cabinet
B. Microwave oven cutout
C. Lower cabinet
D. Floor
E. Lower oven cutout

Required Cutout Dimensions

For minimum depth requirements, see chart.

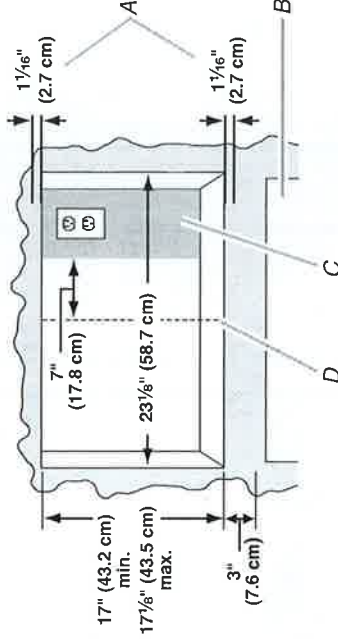

A. Trim kit frame overhang
B. Cutout for lower oven
C. Recommended region for receptacle location (no less than 7" [17.8 cm] to the right of cutout centerline)
D. Cutout centerline


Receptacle Location Minimum Depth

Receptacle Location	Minimum Depth
Within recommended region	20" (50.8 cm) with flush receptacle; 22" (55.9 cm) with non-flush receptacle
Outside recommended region	22" (55.9 cm) with flush receptacle; 24" (61.0 cm) with non-flush receptacle

NOTES:


- Depth requirements depend upon receptacle and its location within or outside of recommended region. See illustration and chart above.
- Height dimension is critical: 17" (43.2 cm) minimum, 17 1/8" (43.5 cm) maximum.
- Width measurement has $\pm 1/16$ " (2 mm) tolerance.
- 3" (7.6 cm) minimum dimension is from lower oven cutout ceiling to microwave oven cutout floor.
- Trim kit frame extends 1 1/16" (2.7 cm) above and below the cutout opening.

Trim Kit Frame Dimensions

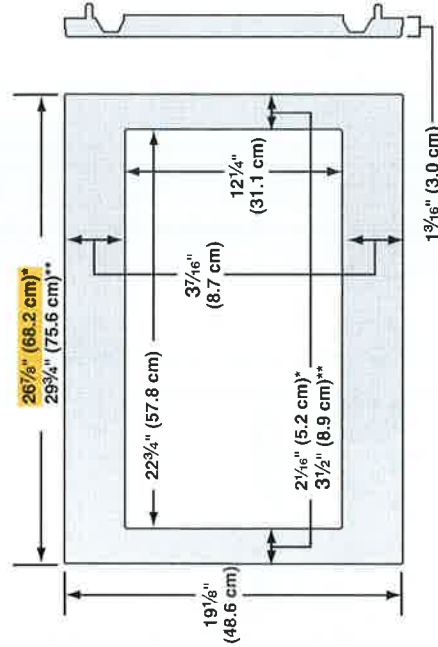

*27" (68.6 cm) trim kit
**30" (76.2 cm) trim kit

Lot 385



AVV-309S
30" under cabinet hood - MSRP: \$879.00




Model	AVV-309S
Dimensions	29 1/2" (W) x 22" (D) x 9 13/16" (H)
Stainless steel grade	201
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	900 CFM, 4-speeds
Blower performance	Speed 1, 1.5 sones
Filter type	Speed 4, 7.5 sones
Duct transition	2 Stainless steel baffle filters (included)
Ducting	8" round (top)
Electrical requirements	Ducted
1-year Warranty	Parts and labour, in-home service

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice



RECEIVED
NOV 30 2020

Lot 385




AVV-309S/AVV-369S

Dimensions

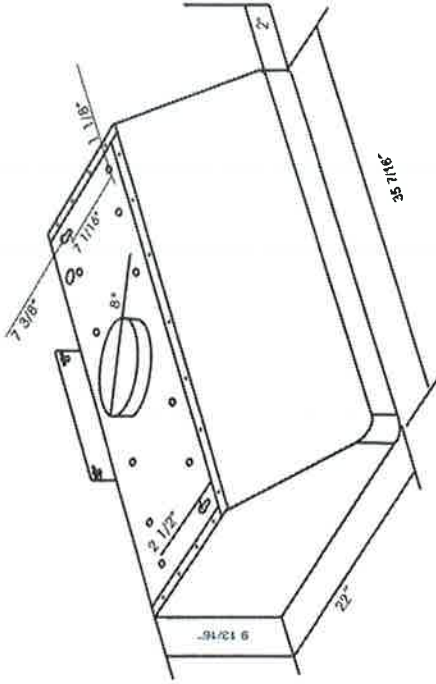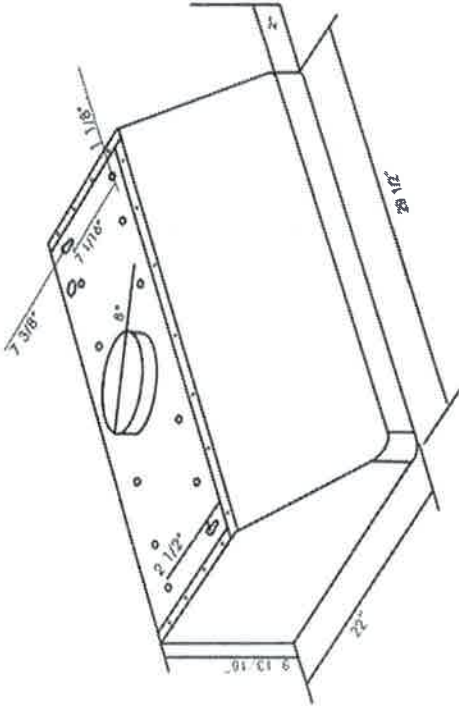


Installation

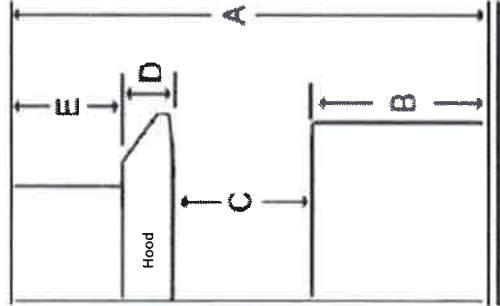

A	Floor to ceiling height	variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	9 13/16"
E	Chimney height	N/A

Duct transition

8" Top round



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Need technical support? 1(888) 651-2534

RECEIVED

NOV 30 2020

Lot 385



Free-standing range

Installation Manual

HDS8055U, HDS8055C, HDS8045U, HDS8045C,
HDS8655U, HDS8655C, HDS8645U, HDS8645C




BOSCH

Invented for life




RECEIVED
NOV 30 2020




General Information


30":

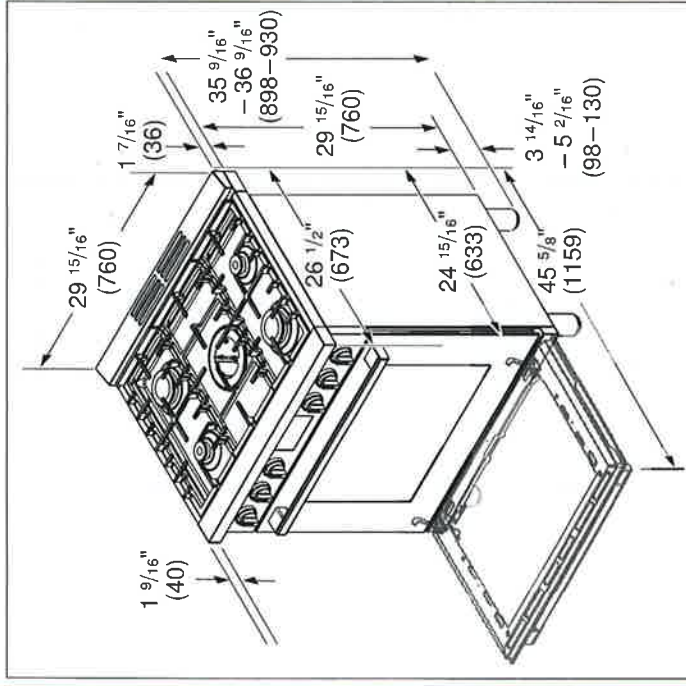

36":

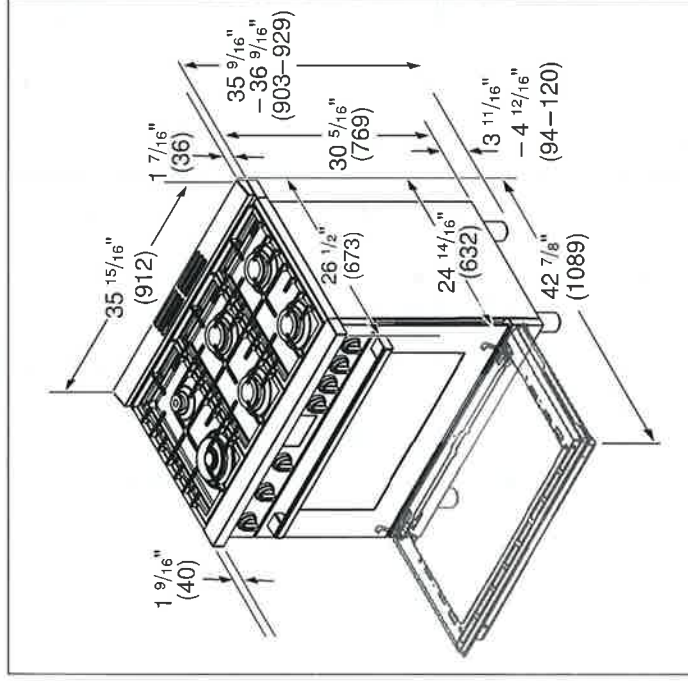

Cabinet Requirements

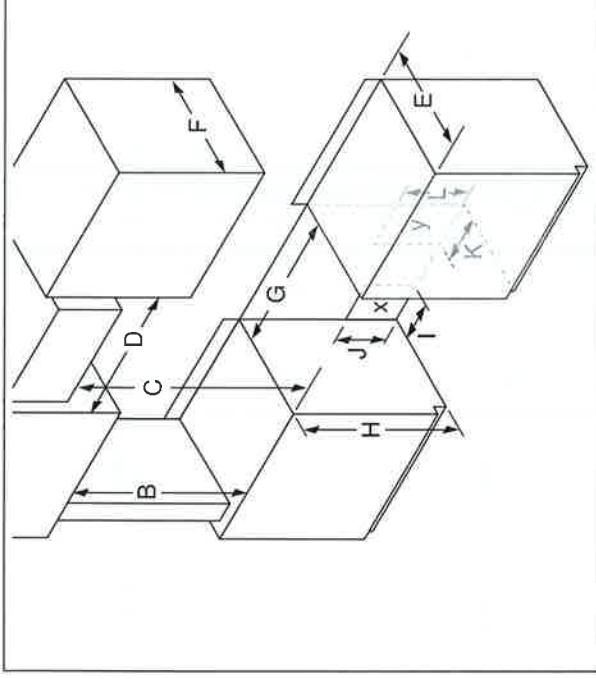

X = Grounded Outlet

Y = Gas Supply Line

The minimum spaces that must be maintained when installing the gas cooktop shall be:

B minimum 18" (457 mm)

C minimum 30" (762 mm) clearance between the top of the cooking surface and the bottom of the unprotected wood or metal cabinet

D 30": minimum 30" (762 mm)

36": minimum 36" (914 mm)

minimum 25" (635 mm)

maximum 13" (330 mm)

30": minimum 30" (762 mm)

36": minimum 36" (914 mm)

Zero clearance between adjacent combustible construction below the countertop surface and sides of the appliance.

H 35"6/16 - 36"10/16 (898 - 930 mm)

I 11" (279 mm)

J 7" (178 mm)

K 6" (150 mm)

L 11" (279 mm)