



36" GAS PROFESSIONAL RANGETOP WITH GAS GRILL

Signature Features

15 RANGETOP CONFIGURATIONS

With 15 unique configurations, it's up to you. Induct with chrome, our griddle cooks up well after heavy usage. Fire up the grill for indoor entertainment on your terms.

HALO-EFFECT KNOBS

A halo of luminary LEDs glows softly when the burner is lit or the oven is on.

DUAL-STACKED POWERBURNERS

Two stacked, symmetrical flames bloom and retreat at your inclination, offering total control over heat levels. High heat searing and wok cooking. Low, slow simmer and melt. Infinite intermediate settings satisfy every appetite.

Lot 78

JGCP636H

Feature Listing

PERFORMANCE FEATURES

Dual-Stacked PowerBurners

Grill

20,000 BTU Dual-Stacked PowerBurner

18,000 BTU Dual-Stacked PowerBurner

9,000 BTU Dual-Stacked PowerBurner

Electronic Ignition with Flame-Sensing™ Re-ignition

CONTROL FEATURES

Halo-Effect Knobs

DESIGN FEATURES

15 Rangetop Configurations

Cast Iron Grates

OPTIONAL ACCESSORIES

Gas Connector Kit (Required) - 30-48KITRC

High Altitude Kit (Natural Gas) - W10160841

High Altitude Kit (LP Gas) - W10237648

9" Stainless Steel Backsplash - W10115776

Stainless Steel Backsplash with Two Shelves (36") - W10265446

Wick Ring - W10216179

AtFresh™ Kitchen & Appliance Cleaner, 16 oz. - W10355010

Style Options

RISE™

JGCP636HL

NOIR™

JGCP636HM

Specifications

Shipping Weight (lbs)

Volts 120

Amps 15

Dimensions



LIMITED
WARRANTY

Bold - Top Features

JENNAIR®

RECEIVED


JUN 22 2021

JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JCCPS48H
Overall Width (A)	29-3/4" (75.6 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)
Grate Depth (B)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Depth without Control Panel (C)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)
Depth with Control Panel Overhang (D)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Depth with Knobs: RISE* (E)	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Depth with Knobs: NOIR* (E)	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

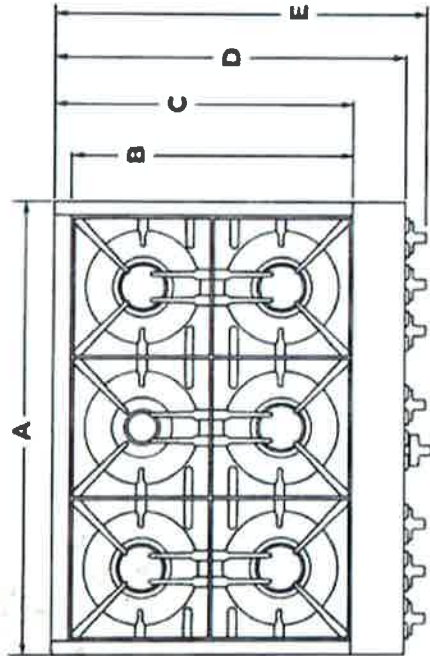

TOP VIEW

★

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cabinet-based decisions until you have received the final product. For more information, refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts, or beginning installation. All Jennair appliances are appropriately UL, CUL or CSA approved.

1



JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Grate Width (F)	27-7/16" (69.7 cm)	33" (83.8 cm)	44-3/8" (112.7 cm)
Gas Inlet to Surface (G)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Center to Gas Inlet (H)	• 11" (27.9 cm)	14-1/8" (35.9 cm)	19-5/8" (49.8 cm)
Recessed Rangetop Width (I)	29-1/8" (74 cm)	35" (88.9 cm)	47-1/4" (120 cm)

*Includes width of grates and griddle

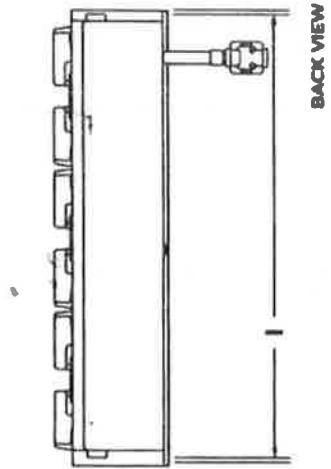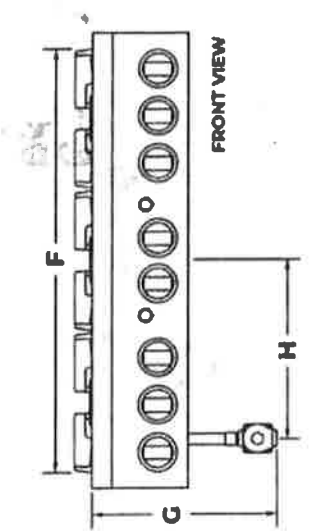


JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Height with Grates (J)	9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
Control Panel Height (K)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
Recessed Rangetop Height (L)	7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
Cooking Surface Height (M)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
Recessed Rangetop Depth (N)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Depth with Control Panel (O)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

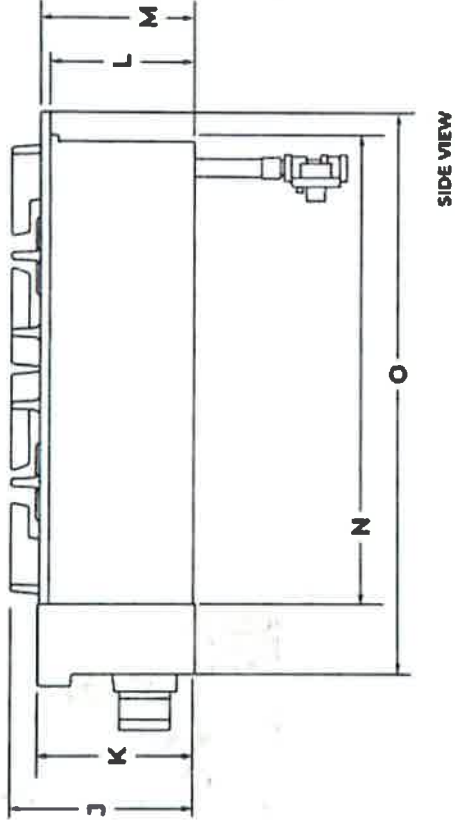

SIDE VIEW

★

IMPORTANT: Supplied regulator does not control gas pressure and is provided for reference purposes only.


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP48H
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.

*Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

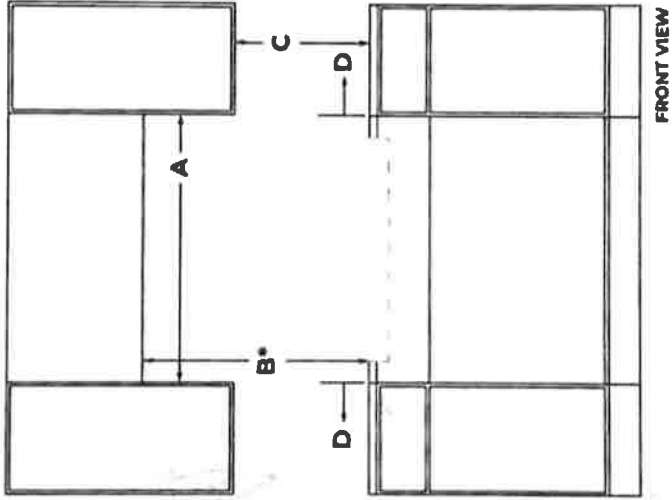


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JCCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Recommended Upper Cabinet Depth (E)	13" (33 cm)	13" (33 cm)	13" (33 cm)
Clear to Wall Depth (F)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.
Clear to Countertop Height (G)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)
Cabinet Depth (H)	24" (61 cm)	24" (61 cm)	24" (61 cm)

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the outlet at 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

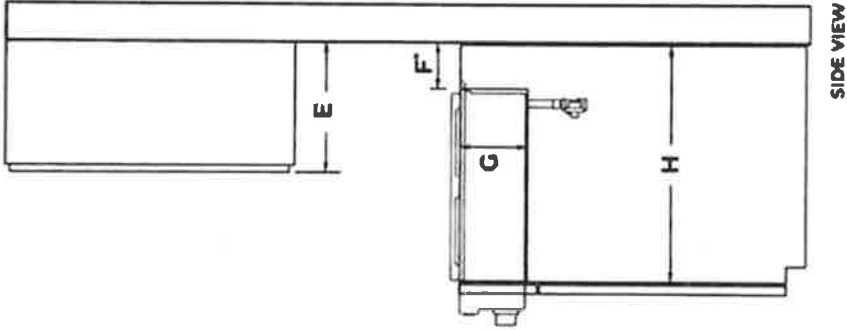


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Countertop and Cabinet Cutout Width (I)	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-3/8" (120.3 cm)
Countertop and Cutout Depth (J)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
Notch Width (K)	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
Cutout Width (L)	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

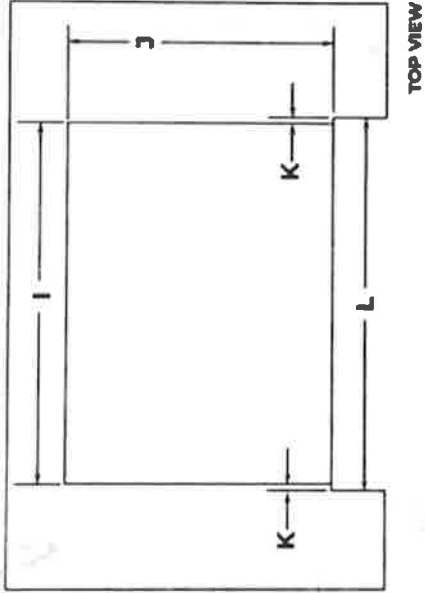

JENNAIR® DIMENSIONS

RANGETOPS

ELECTRICAL REQUIREMENTS

?

ELECTRIC REQUIREMENTS CHECKLIST


☐

A 120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

☐

A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL OUTLET ZONE

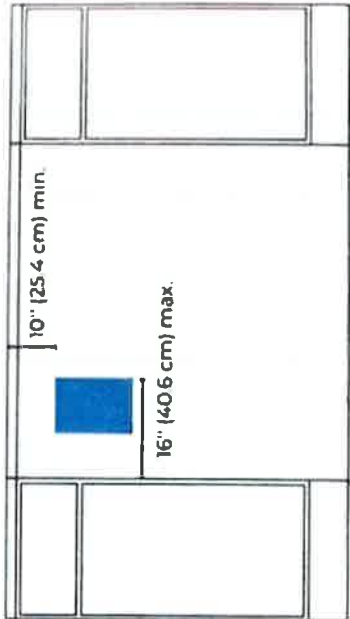

FRONT VIEW

?


IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY, CALL A LICENSED, QUALIFIED ELECTRICIAN

JENNAIR® DIMENSIONS

RANGETOPS

GAS REQUIREMENTS


RECOMMENDED GAS SUPPLY LOCATION

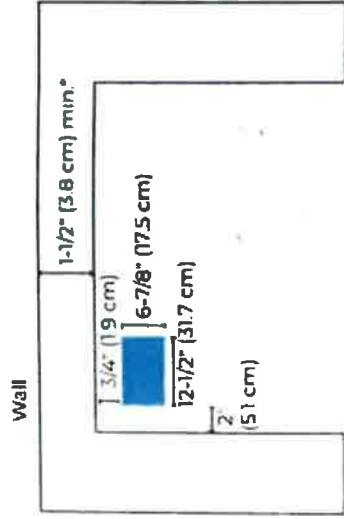

TOP VIEW

*If the back wall is constructed of a combustible material and a backsplash is not installed a 7-1/2" (191 cm) minimum clearance is required from the cutout or 6" (152 cm) minimum clearance from the back edge of the range top.

GAS SUPPLY ZONE

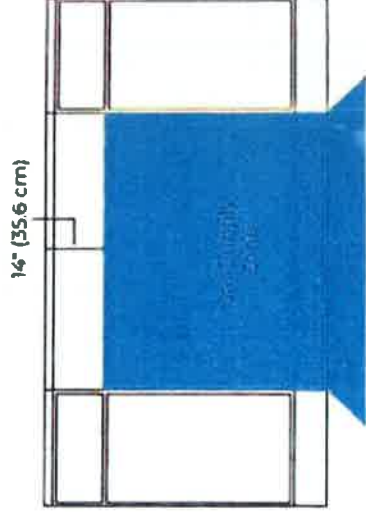

FRONT VIEW

? IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY, CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.


Lot 78

WW60M9900AV

SAMSUNG

Samsung FlexWash™ Washer

5.0 + 1.0 cu. ft. Total Capacity DOE

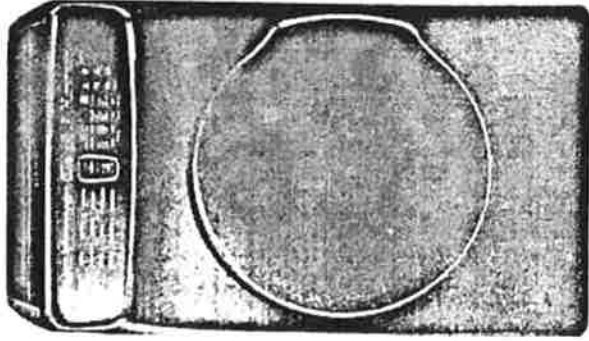

Signature Features

FlexWash™

- Two washers in one lets you wash separate loads at the same time.

6.0 cu. ft. Total Capacity

- 5.0 + 1.0 cu. ft. upper and lower washers mean fewer washes, less time in the laundry room.

Super Speed (Lower Washer)

- Wash a full load in as little as 30 minutes – 45% faster.*

*Normal cycle time can now be compared to an extra up to 90 minutes as compared to WF45C700 washer without Super Speed. Based on DOE standard average of 7.5 loads per cycle.



FlexWash™



5.0 cu. ft. + 1.0 cu. ft. Capacity

Available Colors



Black Stainless Steel (shown)



White

Lower Wash Features

- Super Speed
- Steam Wash
- Wi-Fi Connectivity
- PowerFoam™
- VRT Plus™ Technology
- Self Clean+
- Smart Care
- Swirl Drum Design

- Touch Controls
- 1300 RPM Maximum Spin Speed
- Direct Drive Motor

Convenience

- Child Lock
- Door Lock
- Drum Light
- Dispenser Trays: Main Wash, Softener, Bleach

Upper Wash Features

- VRT™ – Vibration Reduction Technology
- Wi-Fi Connectivity
- Self Clean
- Smart Care
- 800 RPM Maximum Spin Speed
- Stainless Steel Tub
- Direct Drive Motor
- Touch Controls

Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Softener, Bleach
- Aqua Pebble Detergent Pod

RECEIVED

JUN 22 2021

WV60M9900AV

Samsung FlexWash™ Washer

5.0 + 1.0 cu. ft. Total Capacity DOE


SAMSUNG

Installation Specifications


If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch.² Your washer alone does not require a specific air opening.

Alcove or closet installation


Minimum Clearance for Closet and Alcove Installations:

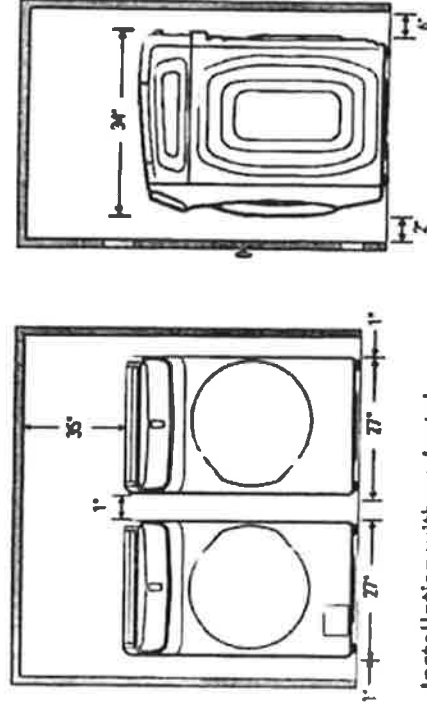

Installation with pedestal

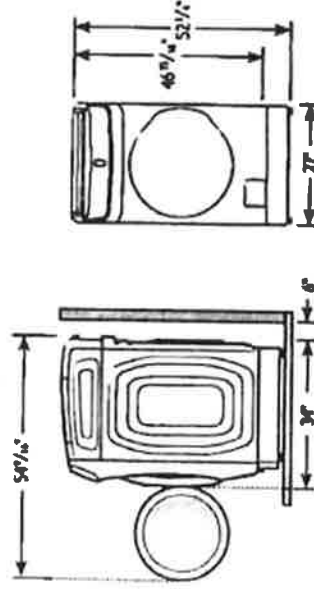

Dimensions

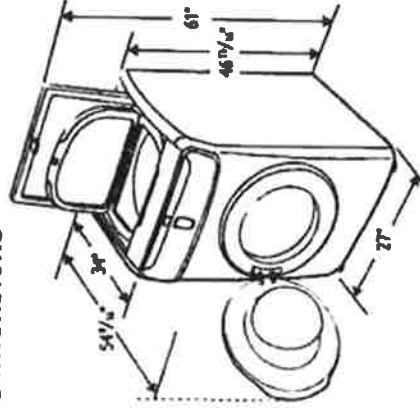

5.0 cu. ft. Capacity Lower Washer

12 Preset Wash Cycles:

Eco Cold, Normal, Heavy Duty, Permanent Press, Sanitize, Towels, Bedding, Whites, Active Wear, Delicates, Quick Wash, Rinse + Spin

11 Options:

Super Speed, Steam, Self Clean+, Delay End, Pre Soak, Spin Only, Smart Control, Smart Care, Drum Light, Child Lock, Sound

5 Temperature Settings:

Extra Hot, Hot, Warm, Cool, Cold

5 Spin Settings:

Extra High, High, Medium, Low, No Spin

5 Soil Settings:

Extra Heavy, Heavy, Normal, Light, Extra Light

Dispenser Trays: Main Wash, Softener, Bleach

1.0 cu. ft. Capacity Upper Washer

5 Preset Wash Cycles:

Normal, Active Wear, Delicates, Rinse + Spin, Spin Only

7 Options:

Cold/Warm Water Temp, Extra Rinse, Self Clean, Smart Control, Sound, Child Lock, Smart Care

Dispenser Trays: Softener, Bleach

Warranty

One (1) Year Parts and Labor

Three (3) Years Stainless Steel Drum (Part Only)

Ten (10) Years Direct Drive Motor (Part Only)

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 46 15/16" x 34"

Weight: 308 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 9/16" x 52" x 36 1/4"

Weight: 319 lbs

Color	Model #	UPC Code
Black Stainless Steel	WV60M9900AV	887276196947
White	WV60M9900AW	887276196954

Matching Dryer (Electric/Gas)

Black Stainless Steel	DVE60M9900V	887276197562
White	DVE60M9900W	887276197586
Black Stainless Steel	DVG60M9900V	887276197616
White	DVG60M9900W	887276197623

Actual color may vary. Design, specifications, and color availability are subject to change without notice. All dimensions and measurements are approximate.
©2017 Samsung Electronics America, Inc. 88 Challenger Road, Westfield Park, NJ 07090. Tel: 800-SAMSUNG, Samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.

RECEIVED


JUN 22 2021

DVE60M9900V/AC



www.samsung.com/ca

Dryer with FlexSystem | 7.5 cu.ft.

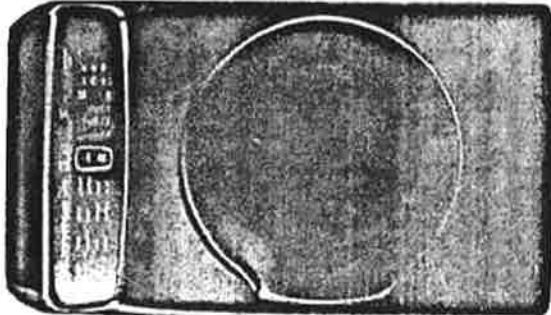

- Cycle time (min) 75 min
- Energy Star Certification
- Energy Consumption (annual) 607 kWh/year
- DOE Energy Factor 3.04 kWh/kWh
- Interior Drum Light
- Smart Control
- Smart Care
- Reversible Door
- Child Lock
- Filter Check Indicator
- Mixed Load Bell
- Steam
- Vent Exhaust (Electric/Gas) 4 ways
- Wrinkle Prevent
- Drum Material Stainless Steel
- Refresh | Wrinkle Away | Steam Sanitize
- Normal | Heavy Duty | Towels
- PPerm Press | Active wear | Bedding
- Delicates | Time Dry | Air Fluff
- Adjust Time (Up) | Adjust Time (Down) | Anti Static
- Mixed Load Bell | Smart Control / Monitor
- Smart Care | Drum Light | Child Lock
- Sound | Wrinkle Prevent

Color

Black Stainless

Dimensions

Width	27"
Height	47"
Depth	32.5"

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections with the installation

•Registered trademark/TM Trademark of Samsung Electronics Canada Inc. © Samsung Electronics Canada Inc. All Rights Reserved.

All other trademarks are owned by their respective companies.

Because Samsung Electronics Canada Inc. policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.

RECEIVED

JUN 22 2021

Installation

Alcove or closet Installations


⚠ WARNING

- The dryer must be exhausted to the outside to reduce the risk of fire when installed in an alcove or closet
- No other fuel-burning appliance should be installed in the same closet as the dryer.

Minimum clearances between the dryer and adjacent walls or other surfaces:


Sides	1 in. (25 mm)	Rear	6 in. (152 mm)
Top	21 in. (533 mm)	Closet front	2 in. (51 mm)

Installation with pedestal

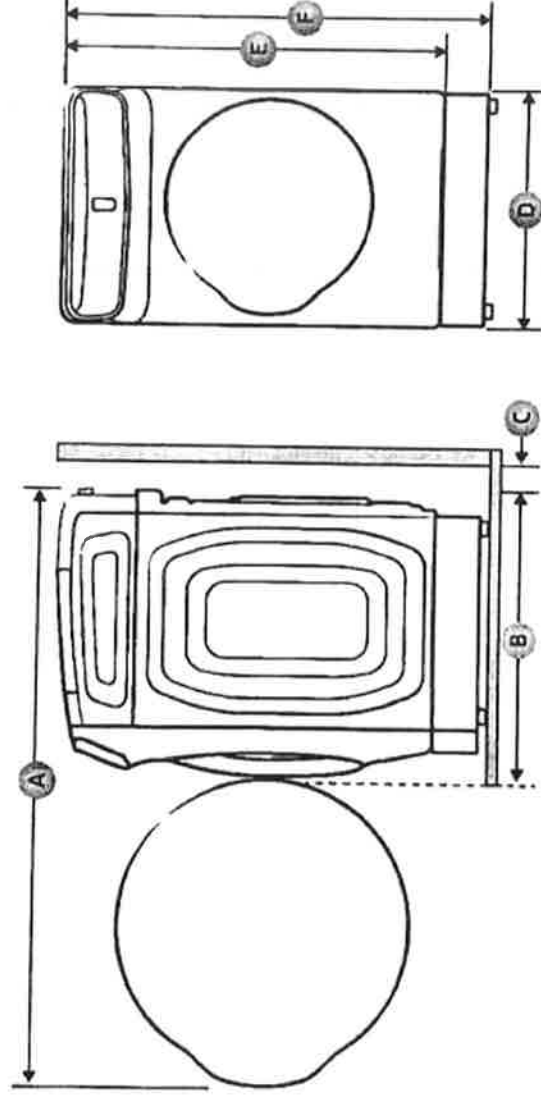


A	53.7 in. (1365 mm)	D	27 in. (686 mm)
B	32.5 in. (825 mm)	E	46.9 in. (1192 mm)
C	6 in. (152 mm)	F	52.2 in. (1326 mm)

Side by side installation

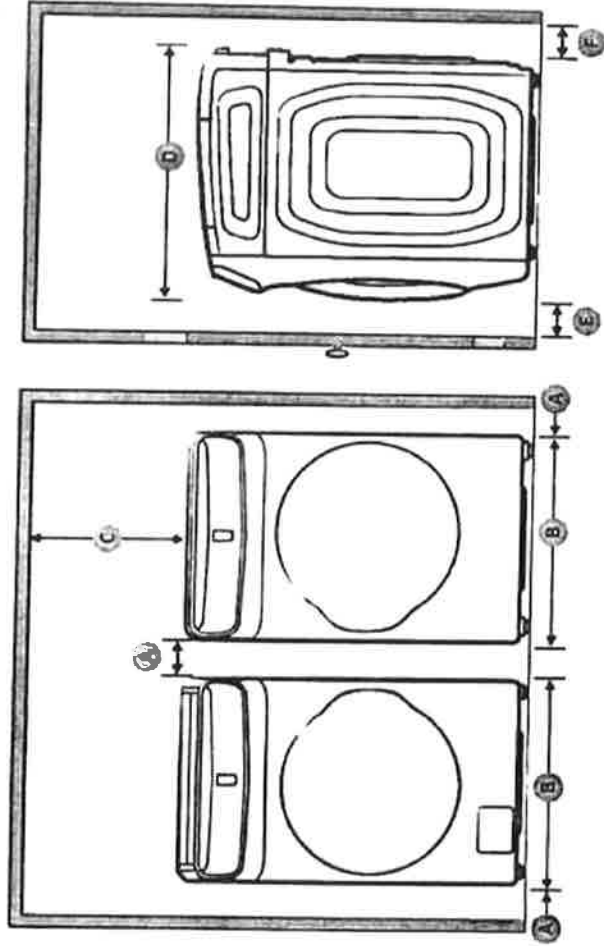

A	1 in. (25 mm)	D	32.5 in. (825 mm)
B	27 in. (686 mm)	E	2 in. (50 mm)
C	21 in. (533 mm)	F	6 in. (152 mm)

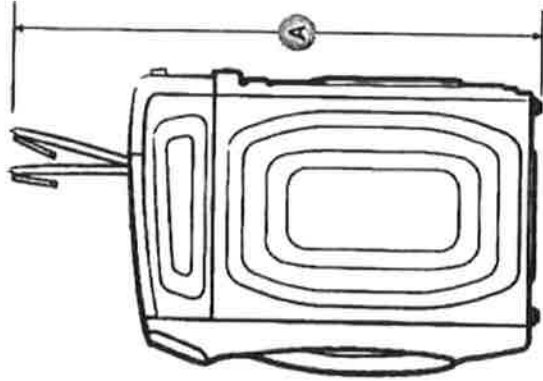

A	61 in. (1550 mm)
---	------------------

Installation

Ducting requirements

Recommended		Use only for short-run installation
Weather hood type		
	4" (10.2 cm)	2.5" (6.4 cm)
	No. of 90° elbows	
	0	
	1	
	2	
	3	
Rigid		Rigid
Metallic flexible*		Metallic flexible*
80 ft. (24.4 m)		74 ft. (22.6 m)
68 ft. (20.7 m)		62 ft. (18.9 m)
57 ft. (17.4 m)		51 ft. (15.5 m)
47 ft. (14.3 m)		41 ft. (12.5 m)
		33 ft. (10.1 m)
		29 ft. (8.8 m)
		25 ft. (7.6 m)
		21 ft. (6.5 m)

NOTE

- * Use a 4-inch (10.2 cm) diameter rigid aluminum or galvanized steel duct.
- If you integrate the dryer's vent system with an existing exhaust system:
- Make sure the exhaust system meets all applicable local, state, and national regulations.
- Verify you are not using flexible plastic duct.
- Make sure to check for and remove all lint buildup from inside the existing ducts.
- Confirm the duct is not kinked or crushed.
- Make sure the exhaust hood damper opens and closes freely.

Manometer measurements

The static pressure in any exhaust system must not exceed 0.83 inches of water column or be less than 0. Note that these values are measured with the dryer running with a manometer presented to the exhaust duct that connects to the dryer. The dryer drum must be empty and lint filter clean.