

DF48450CG/S/P

Not 29
e. Apr. 28, 23
MA HMA

FEATURES

Wolf's patented gas dual-stacked, sealed burner design provides precise high-to-low temperature control and a spark ignition system that reignites the burner automatically.

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking.

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results.

Ten cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm, were developed by Wolf chefs to maximize the performance of your oven.

The adjustable 16,000 Btu infrared charbroiler features a high and low setting, aptly handling a range of foods from steaks and burgers to delicate fish fillets and vegetables.

The redesigned 15,000 Btu griddle features even, precise heat, handling breakfast with equal finesse as seared burgers and stir-fried vegetables.

Four dual-stacked burners produce up to 20,000 Btu for fast boils and intense sears and 300 Btu for true simmers and worry-free melts.

For improved temperature control and safety, the spark ignition system reignites burners automatically.

The full-color touch screen is intuitive and easy to read, discreetly hiding away when not in use.

LED backlit control bezels illuminate when in use, indicating which burners are active.

The oven offers self-clean, delayed start, timed cook, and Sabbath features.

The temperature probe alerts you when your dish has reached the desired temperature.

The oven's Wi-Fi enabled feature lets you remotely preheat, select modes, and adjust oven temperature from your mobile device.

ACCESSORIES

11" Cutting Board

18" Broiler Pan

18" Dehydration Rack Set

18" Full-Extension Ball-Bearing Oven Rack

18" Standard Oven Rack

2-Burner Wok Grate

30" Broiler Pan

30" Dehydration Rack Set

30" Full-Extension Ball-Bearing Oven Rack


30" Premier Baking Sheet

30" Standard Oven Rack

48" and 60" Dual Fuel Brushed Brass Bezel Kit

Bake Stone Kit


Filter Trim

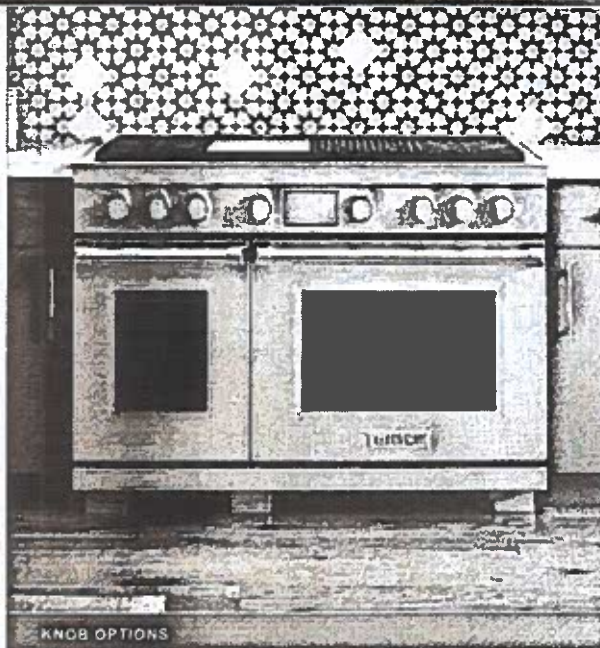

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 1 - 15,000 Btu burner
- 1 - 18,000 Btu burner
- 1 - 20,000 Btu burner
- 1 - 16,000 Btu charbroiler
- 1 - 15,000 Btu (14,000 Btu LP) griddle
- Stainless-steel charbroiler and griddle covers
- Stainless-steel island trim

Lot 29


- Griddle Cleaning Kit
- Griddle Cleaning Pads
- Griddle Cleaning Solution
- Temperature Probe
- Red, black, brushed stainless, brushed brass, and brushed gray knob
kits
- Rear Caster Covers
- Front Leg Extension Covers
- Stainless Steel Kickplates
- 5" and 10" stainless steel risers, and 20" riser with shelf
- Accessories available through an authorized dealer.
For local dealer information, visit pubsco-will.com/dealer

Specifications are subject to change without notice. This information was generated on April 26, 2023. Verify specifications prior to finalizing your order by enclosures.


PRODUCT SPECIFICATIONS

Model	DF48458CG/S/P
Dimensions	47 7/8"W x 36 1/2"H x 28 1/2"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 20"D
Oven 2 Interior Dimensions	13 1/4"W x 17 1/2"H x 19 3/4"D
Oven 1 Usable Capacity	1.8 cu. ft.
Oven 1 Overall Capacity	2.7 cu. ft.
Oven 2 Usable Capacity	3.2 cu. ft.
Oven 2 Overall Capacity	5.1 cu. ft.
Door Clearance	21"
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female

ELECTRICAL

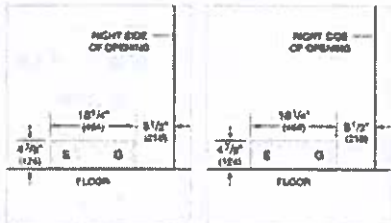


GAS




NOTE: Dimensions in parentheses are in millimeters unless otherwise specified.

DIMENSIONS

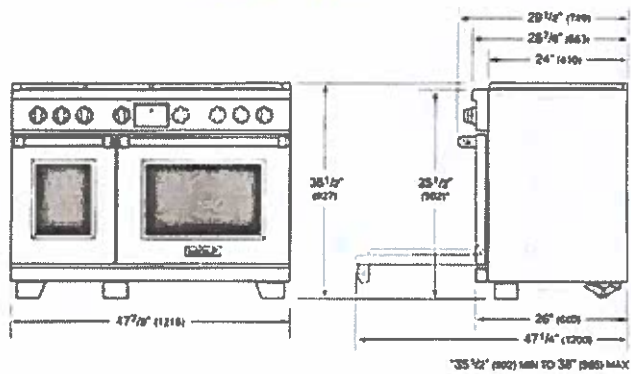

STANDARD INSTALLATION

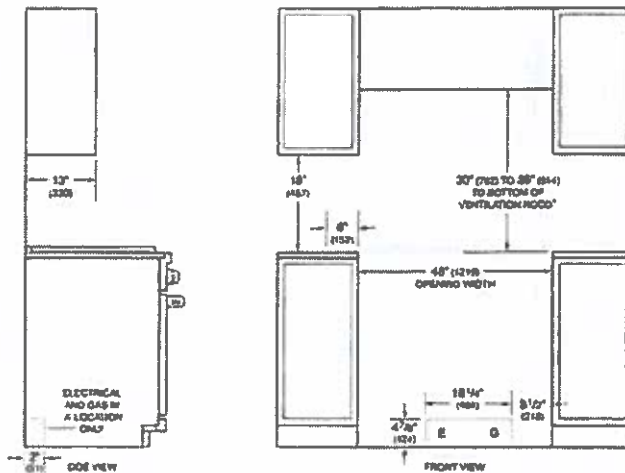

*When used as a broiler, 36\"/>

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.

combustible materials cannot be located within the area.

For stand installation, 13\"/>

PW482418

Lot 29 (MA) (HM)
 Apr. 28, 23

FEATURES

Breathe cleaner air and enjoy less greasy residue in your kitchen

Make a statement with a stainless professional look or opt for lower-profile "hidden" ventilation

Matches the same heavy-duty stainless-steel construction, hand-finished hemmed edges, and welded seams of all Sub-Zero, Wolf, and Cove products

Select from internal, in-line, or remote blower options (blower required)

Illuminates your cooking area with LED lighting with two brightness settings

Rely on a heat sensor that automatically turns on the blower or increases its speed when exhaust temperatures exceed 200 degrees Fahrenheit

Minimizes the backward flow of cold air with backdraft transition

ACCESSORIES

Backsplash

Backsplash with Warming Racks

Horizontal Discharge Kit

Make-Up Air Damper


In-line Blowers

Internal Blowers

Remote Blowers

48" Pro Wall Hood Duct Covers

Accessories available through an authorized dealer
 For local dealer information, visit subzero-wolf.com/dealer

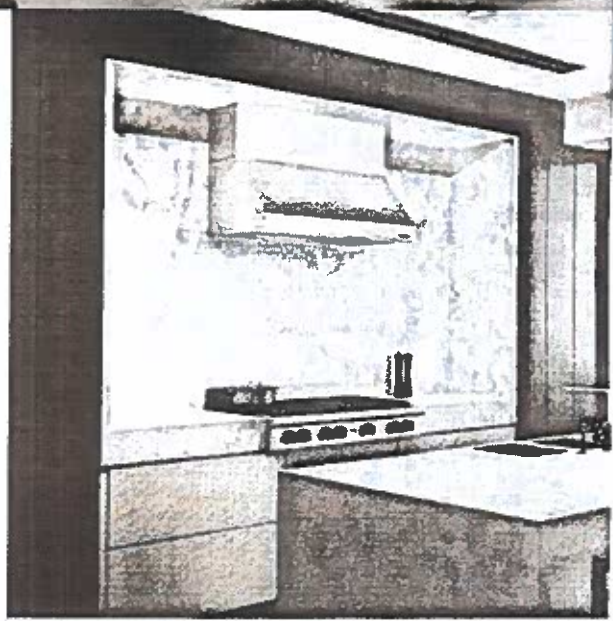


BLOWER OPTIONS

- 300 CFM Internal
- 400 CFM Internal
- 600 CFM Internal
- 800 CFM Internal
- 1200 CFM Internal
- 600 CFM In-line
- 1100 CFM In-line
- 600 CFM Remote
- 900 CFM Remote
- 1500 CFM Remote

PRODUCT SPECIFICATIONS

Model	PW682418
Dimensions	48"W x 18"H x 24"D
Weight	94 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	10" Round
Bottom of Hood to Countertop	30" to 36"


ELECTRICAL



NOTE: Dimensions in parentheses are in millimeters unless otherwise specified

DIMENSIONS

Lot 29

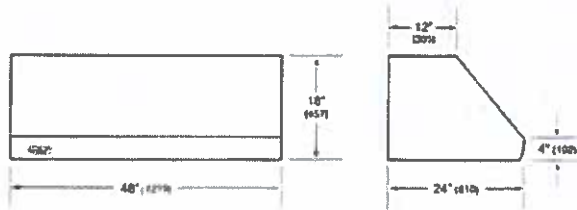

DW2450

FEATURES

Adapts easily to differently shaped dishes and glasses with a height-adjustable middle rack and fold-down tines

Removes food and grease with three powerful spray arms and custom wash and dry options for different soil levels

Filters food efficiently through fine mesh for cleaner water throughout every cycle

Dries every type of dish, utensil, and pan thoroughly with a hot rinse and fan-assist

Operates in near silence that never interrupts

Matches classic Wolf and Sub-Zero stainless steel or accepts custom panels to integrate into any kitchen design

Opt for a stainless steel exterior panel for equal durability and a timeless, sophisticated look

Provides better visibility with interior LED lights

Maintains clean lines with sleek control panel and floor status light

Marvel at the durability of the stainless steel interior, built for decades of use

Monitor cycle progress, even start a new cycle, remotely. Receive alerts when rinse aid is low

Cove's leak protection system offers peace of mind in the rare event of a leak. A conductivity sensor in the base of the unit will automatically stop a cycle in progress if it detects a leak.

ACCESSORIES

Pro Handle

Tubular Handle

24" Stainless Steel Door Panels

60cm Stainless Steel Door Panels

24" Stainless Steel Kickplates

60cm Stainless Steel Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit www.cove-usa.com/dealer



PRO

TUBULAR

PRO


DISHWASHER

- 4 LED lights (2 sides, 2 top)
- 43 spray jets across three spray arms
- Four-stage, fine mesh filter
- Adjustable stemware rail
- Adjustable cup shelf
- Height-adjustable middle rack
- Easy-glide bottom rack
- Upper silverware rack
- One large utensil basket


PRODUCT SPECIFICATIONS

Model	DW2450
Dimensions	23 5/8"W x 34 1/2"H x 23 1/4"D
Door Clearance	26 3/4"
Sound Level	41 dBA (Model and cycle/option dependent)
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Cord Length	6'
Water Connection	5' braided tubing with 3/8" female compression fitting
Drain Connection	5' (1.5 m) corrugated tubing
Plumbing Pressure	30-140 psi

ELECTRICAL



PLUMBING



COVE OPENING WIDTH Cove dishwashers accommodate varying opening widths. A 23 5/8" (60 cm) width provides minimum reveals and is ideal for new construction. A 24" width is also common; however, reveals for a 24" opening will be larger than the reveals for a 23 5/8" opening unless the panel width is adjusted accordingly. 24" and 60 cm standard steel panels are available and must be specified accordingly.


PANEL SPECIFICATIONS For complete panel specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


DIMET

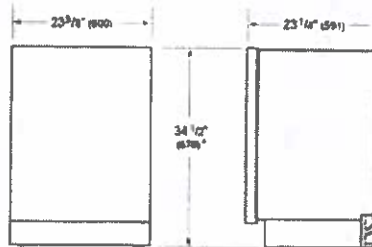


24" (609 mm) TO 34 1/2" (880 mm)



24" (609 mm)



24" (609 mm) TO 34 1/2" (880 mm)



MDD24TE/S/TH

FEATURES


ACCESSORIES

Pro Handle

Side Trim

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/dealer

Lot 29
MA HM
Apr. 28, 23

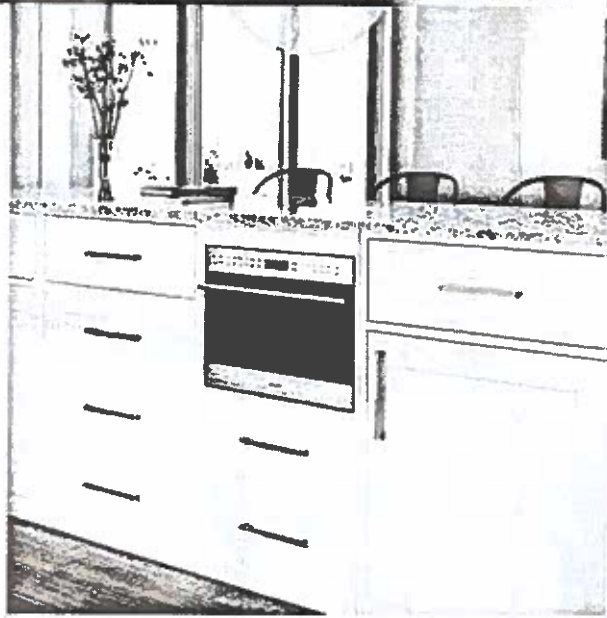

PRODUCT SPECIFICATIONS


Model	MDD24TE/S/TH
Dimensions	23 1/2"W x 17 7/8"H x 20"D
Capacity	1.6 cu. ft.
Door Clearance	14 3/16"
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type

ELECTRICAL


E
ELECTRICAL
SUPPLY WITHIN OPENING
OR IN ADJACENT CABINET
WITHIN REACH OF
POWER CORD

NOTE: Dimensions in parentheses are in millimeters unless otherwise specified

DIMENSIONS

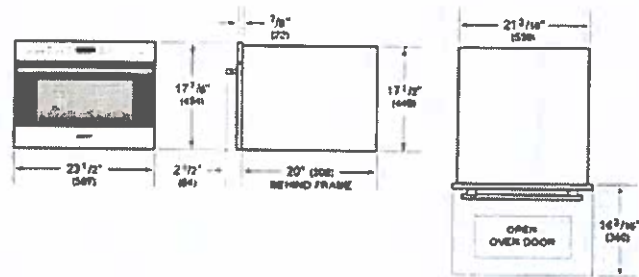

FLUSH INSTALLATION

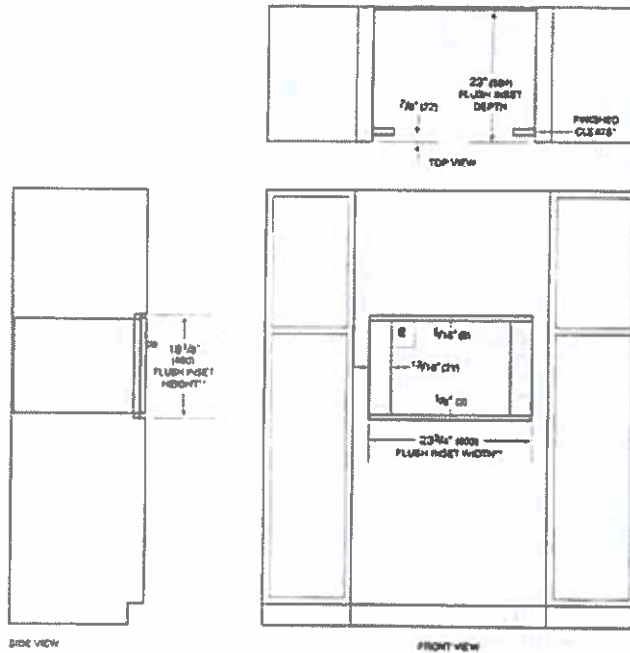


SIDE VIEW

FRONT VIEW

**See on visible end should be aligned to match cabinetry
**Dimension provides minimum spacing

29.5 cu. ft. InstaView™ Door-in-Door® 4-Door French Door Refrigerator

- 29.5 cu. ft. Capacity
- InstaView™ Door-in-Door®
- Full-Convert™ Drawer
- Dual Ice Maker with Craft Ice™
- Smart Cooling Plus™ System
- Door Cooling +
- Premium LED Lighting
- Measured Fill
- CoolGuard™ Stainless Steel Back Wall
- LG ThinQ® Technology (Wi-Fi)

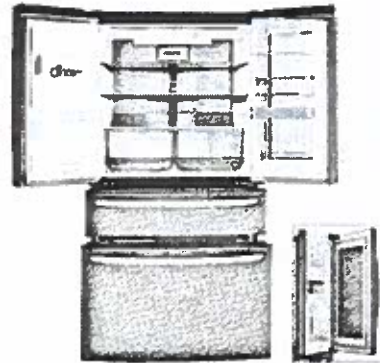

COLOR AVAILABILITY

- LRMVS3006S - PrintProof™ Stainless Steel
- LRMVS3006D - PrintProof™ Black Stainless Steel

CAPACITY

Refrigerator (cu. ft.)	17.0
Full-Convert™ Drawer (cu. ft.)	3.6
Freezer (cu. ft.)	8.9
Total Capacity (cu. ft.)	29.5

ENERGY

Energy Consumption (kWh/Year)	799
ENERGY STAR® Qualified	Yes

WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
Dispenser Type	Integrated Ice & Water
Measured Fill	Yes
Dual Ice Maker	Yes, with Craft Ice™
Ice System	Slim SpacePlus®
Daily Ice Production (lbs.)	3.5 lbs.
IcePlus™ Production (lbs.)	3.8 lbs.
Craft Ice™ Daily Ice Production	0.4 lbs.
Ice Storage Capacity (lbs.)	3.0 lbs. + 3.3 lbs.
Dispenser Light	Yes
Water Filter	LT1000P (NSF-Certified*)

COOLING

Compressor Type	Linear Compressor
Dual Evaporators	Yes
Cooling System	Smart Cooling Plus™
Multi-Air Flow™ System	Yes
Door Cooling+	Yes
Temperature Sensors	9
Fresh Air Filter	Yes

CONVENIENCE

Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
LoDecibel™ Quiet Operation	Yes

REFRIGERATOR

No. of Shelves	4 Split (3 Fixed + 1 Folding)
Canilevered Shelves	Yes
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Pantry Drawer	Yes
CoolGuard™	Yes
Refrigerator Light	Micro Surface LED
Full-Convert™ Drawer	Yes
Dividers	Yes
Temperature Range (°F)	-7, 29, 33, 37, 41
Handle Type	SmartPull™ Handle

REFRIGERATOR DOOR

InstaView™ Door-in-Door®	Yes
Door-In-Door® with ColdSaver™ Panel	Yes
No. of Door Bins	6 (1 Adjustable Door-in-Door® Bin)
Door Bin Construction	1 Piece (Clear)

FREEZER	
Freezer Type	Pull Drawer
Freezer Drawers	3-Tier Organization
DuraBase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Ice Storage	Ice Maker & Ice Bin in Freezer
Freezer Light	Premium LED
Freezer Handle	SmartPull™ Handle

SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Remote Monitoring	Yes

MATERIALS AND FINISHES	
Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Handles

ACCESSORIES	
Replacement Water Filter	LT1000P
Replacement Fresh Air Filter	LT120F


TECHNICAL SPECS	
Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Top
Min. / Max. Water Pressure	20 - 120 psi

DIMENSIONS / CLEARANCES / WEIGHTS	
Depth with Handles	38 1/8"
Depth without Handles	35 3/4"
Depth without Door	31"
Depth (Total with Door Open)	50"
Height to Top of Case	69"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	45"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 5/8"
Door Edge Clearance without Handle	2 1/4"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Approx. Weight (Product / Carton)	404 lbs. / 437 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 40"

LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear/Inverter Compressor (Parts Only)	10 Years

 *System tested and certified by NSF International against NSF/ANSI Standard 42, Standard 53 and Standard 401.

DIMENSIONS / CLEARANCES

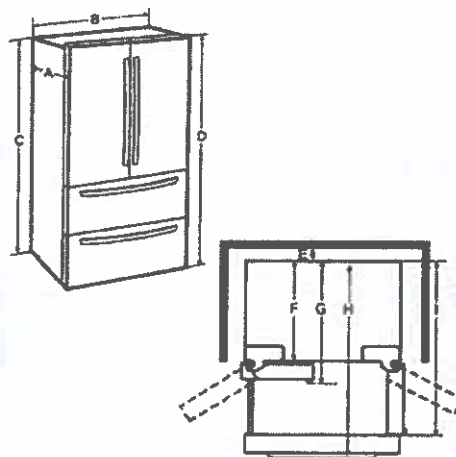

DIMENSIONS / CLEARANCES	
A Depth without Handles	35 3/4" (908 mm)
B Width	35 3/4" (908 mm)
C Height to Top of Case	69" (1753 mm)
D Height to Top of Hinge	70 1/4" (1785 mm)
E Back Clearance	2" (50 mm)
F Depth without Door	31" (785 mm)
G Depth with Handle	38 1/8" (968 mm)
H Depth (Total with Freezer Drawer Open)	59 3/8" (1508 mm)
I Depth (Total with Door Open 90°)	50" (1270 mm)

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

48" DUAL FUEL RANGE - 4 BURNERS, INFRARED CHARBROILER AND INFRARED GRIDDLE

WOLF

DF48450CG/S/P

FEATURES

Wolf's patented gas dual-stacked, sealed burner design provides precise high-to-low temperature control and a spark ignition system that reignites the burner automatically

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Ten cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm, were developed by Wolf chefs to maximize the performance of your oven

The adjustable 16,000 Btu infrared charbroiler features a high and low setting, aptly handling a range of foods from steaks and burgers to delicate fish fillets and vegetables

The redesigned 15,000 Btu griddle features even, precise heat, handling breakfast with equal finesse as seared burgers and stir-fried vegetables

Four dual-stacked burners produce up to 20,000 Btu for fast boils and intense sears and 300 Btu for true simmers and worry-free melts

For improved temperature control and safety, the spark ignition system reignites burners automatically

The full-color touch screen is intuitive and easy to read, discreetly hiding away when not in use

LED backlit control bezels illuminate when in use, indicating which burners are active

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature.

The oven's Wi-Fi enabled feature lets you remotely preheat, select modes, and adjust oven temperature from your mobile device

ACCESSORIES


- 11" Cutting Board
- 18" Broiler Pan
- 18" Dehydration Rack Set
- 18" Full-Extension Ball-Bearing Oven Rack
- 18" Standard Oven Rack
- 2-Burner Wok Grate
- 30" Broiler Pan
- 30" Dehydration Rack Set
- 30" Full-Extension Ball-Bearing Oven Rack
- 30" Premier Baking Sheet
- 30" Standard Oven Rack
- 48" and 60" Dual Fuel Brushed Brass Bezel Kit
- Bake Stone Kit
- Filler Trim



KNOB OPTIONS



TOP CONFIGURATION

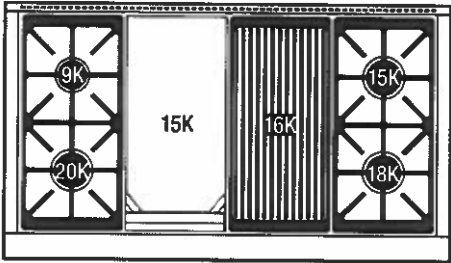

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 1 - 15,000 Btu burner
- 1 - 18,000 Btu burner
- 1 - 20,000 Btu burner
- 1 - 16,000 Btu charbroiler
- 1 - 15,000 Btu (14,000 Btu LP) griddle
- Stainless-steel charbroiler and griddle covers
- Stainless-steel island trim

- Griddle Cleaning Kit
- Griddle Cleaning Pads
- Griddle Cleaning Solution
- Temperature Probe
- Red, black, brushed stainless, brushed brass, and brushed gray knob kits
- Rear Caster Covers
- Front Leg Extension Covers
- Stainless Steel Kickplates
- 5" and 10" stainless steel risers. and 20" riser with shelf
- Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

Lot 29

Specifications are subject to change without notice. This information was generated on April 26, 2023. Verify specifications prior to finalizing your cabinetry/enclosures.

DIMENSIONS

Technical drawing of the WOLF 48-inch electric range, showing front and side views with dimensions in inches and millimeters.

Front View Dimensions:

- Overall Width: 47 7/8" (1216)
- Overall Height: 36 1/2" (927)
- Control Panel Height: 35 1/2" (902)


Side View Dimensions:

- Top Panel Depth: 29 1/2" (749)
- Back Panel Depth: 26 7/8" (683)
- Base Depth: 24" (610)
- Front Panel Depth: 26" (660)
- Overall Depth: 47 1/4" (1200)

Additional Information:

- Brand: WOLF
- Model: 48" Electric Range
- Material: Stainless Steel
- Color: Silver
- Weight: 150 lbs
- Warranty: 5 Year

*35 1/2" (902) MIN TO 38" (965) MAX

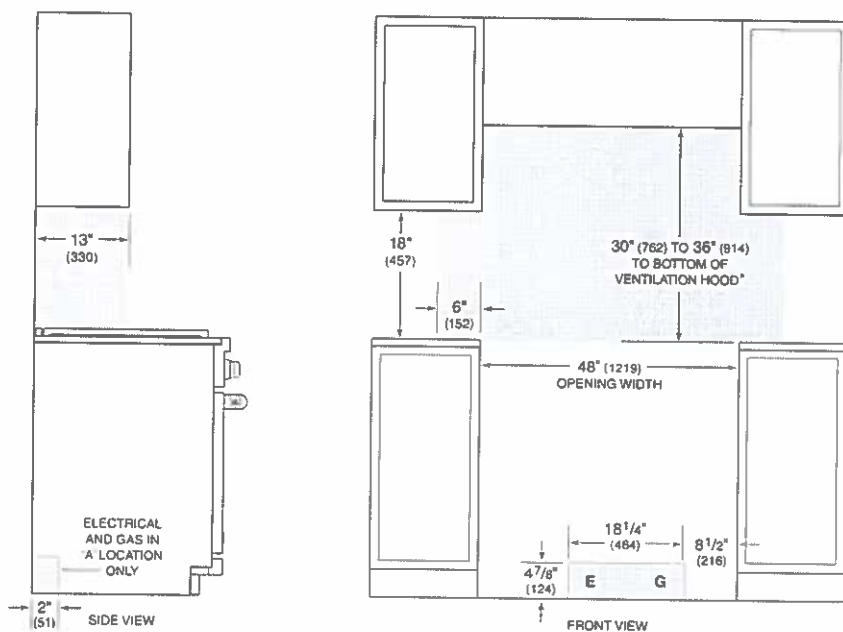

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

PW482418

Lot 29
Apr. 28, 23

FEATURES

- Breathe cleaner air and enjoy less greasy residue in your kitchen
- Make a statement with a stainless professional look or opt for lower-profile "hidden" ventilation
- Matches the same heavy-duty stainless-steel construction, hand-finished hemmed edges, and welded seams of all Sub-Zero, Wolf, and Cove products
- Select from internal, in-line, or remote blower options (blower required)
- Illuminates your cooking area with LED lighting with two brightness settings
- Rely on a heat sentry that automatically turns on the blower or increases its speed when exhaust temperatures exceed 200 degrees Fahrenheit
- Minimizes the backward flow of cold air with backdraft transition

ACCESSORIES

- Backsplash
- Backsplash with Warming Racks
- Horizontal Discharge Kit
- Make-Up Air Damper
- Inline Blowers
- Internal Blowers
- Remote Blowers
- 48" Pro Wall Hood Duct Covers

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.




BLOWER OPTIONS

- 300 CFM Internal
- 400 CFM Internal
- 600 CFM Internal
- 800 CFM Internal
- 1200 CFM Internal
- 600 CFM Inline
- 1100 CFM Inline
- 600 CFM Remote
- 900 CFM Remote
- 1500 CFM Remote

PRODUCT SPECIFICATIONS

Model	PW482418
Dimensions	48"W x 18"H x 24"D
Weight	94 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	10" Round
Bottom of Hood to Countertop	30" to 36"


ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

Lot 29

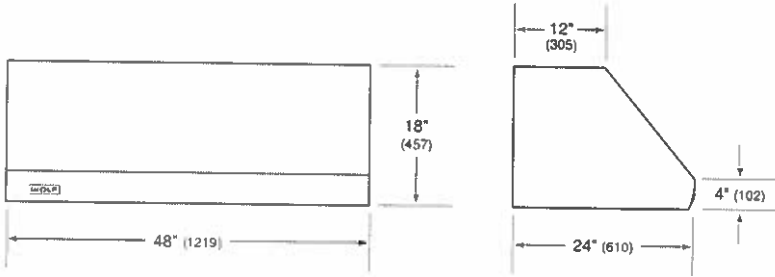

DW2450

FEATURES

- Adapts easily to differently shaped dishes and glasses with a height-adjustable middle rack and fold-down tines
- Removes food and grease with three powerful spray arms and custom wash and dry options for different soil levels
- Filters food efficiently through fine mesh for cleaner water throughout every cycle
- Dries every type of dish, utensil, and pan thoroughly with a hot rinse and fan-assist
- Operates in near silence that never interrupts
- Matches classic Wolf and Sub-Zero stainless steel or accepts custom panels to integrate into any kitchen design
- Opt for a stainless steel exterior panel for equal durability and a timeless, sophisticated look
- Provides better visibility with interior LED lights
- Maintains clean lines with sleek control panel and floor status light
- Marvel at the durability of the stainless steel interior, built for decades of use
- Monitor cycle progress, even start a new cycle, remotely. Receive alerts when rinse aid is low
- Cove's leak protection system offers peace of mind in the rare event of a leak. A conductivity sensor in the base of the unit will automatically stop a cycle in progress if it detects a leak.

ACCESSORIES

- Pro Handle
- Tubular Handle
- 24" Stainless Steel Door Panels
- 60cm Stainless Steel Door Panels
- 24" Stainless Steel Kickplates
- 60cm Stainless Steel Kickplates

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



HANDLE ACCESSORIES



PRODUCT DETAILS


DISHWASHER

- 4 LED lights (2 sides; 2 top)
- 43 spray jets across three spray arms
- Four-stage, fine mesh filter
- Adjustable stemware rail
- Adjustable cup shelf
- Height-adjustable middle rack
- Easy-glide bottom rack
- Upper silverware rack
- One large utensil basket


PRODUCT SPECIFICATIONS

Model	DW2450
Dimensions	23 5/8"W x 34 1/2"H x 23 1/4"D
Door Clearance	26 3/4"
Sound Level	41 dBA (Model and cycle/option dependent)
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Cord Length	6'
Water Connection	5' braided tubing with 3/8" female compression fitting
Drain Connection	5' (1.5 m) corrugated tubing
Plumbing Pressure	30–140 psi

ELECTRICAL



PLUMBING



COVE OPENING WIDTH Cove dishwashers accommodate varying opening widths. A 23 5/8" (60 cm) width provides minimum reveals and is ideal for new construction. A 24" width is also common; however, reveals for a 24" opening will be larger than the reveals for a 23 5/8" opening unless the panel width is adjusted accordingly. 24" and 60 cm stainless steel panels are available and must be specified accordingly.


PANEL SPECIFICATIONS For complete panels specifications including width/height, weight requirements and thickness requirements visit subzero-wolf.com/reveal.

INTERIOR VIEW




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


DIMENSIONS

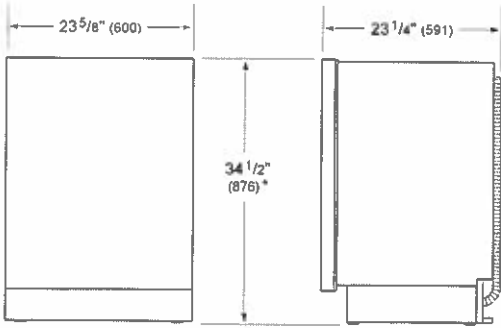


*34" (864) MIN TO 34 5/8" (880) MAX

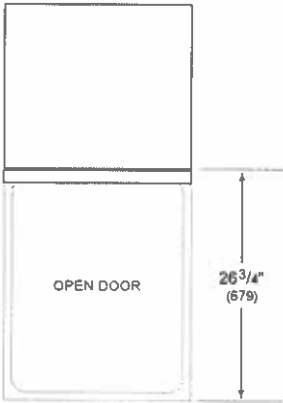

24" INSTALLATION

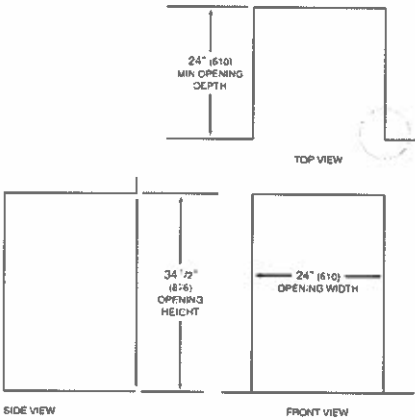

NOTE: 3 1/2" (89) finished returns will fit visible and should be finished to match cabinetry

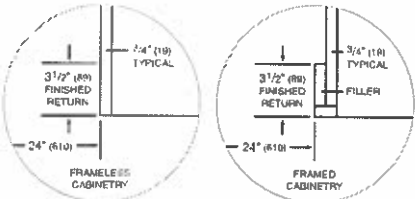

MDD24TE/S/TH

FEATURES

ACCESSORIES

Pro Handle

Side Trim

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.


Not 29
Apr. 28, 23



PRODUCT SPECIFICATIONS

Model	MDD24TE/S/TH
Dimensions	23 1/2"W x 17 7/8"H x 20"D
Capacity	1.6 cu. ft.
Door Clearance	14 3/16"
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Power Cord Length	4 Feet
Receptacle	3-prong grounding-type


ELECTRICAL




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

Lot 29

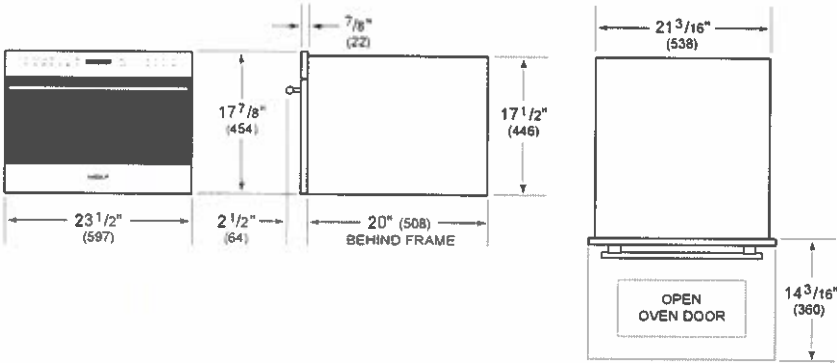

FLUSH INSTALLATION

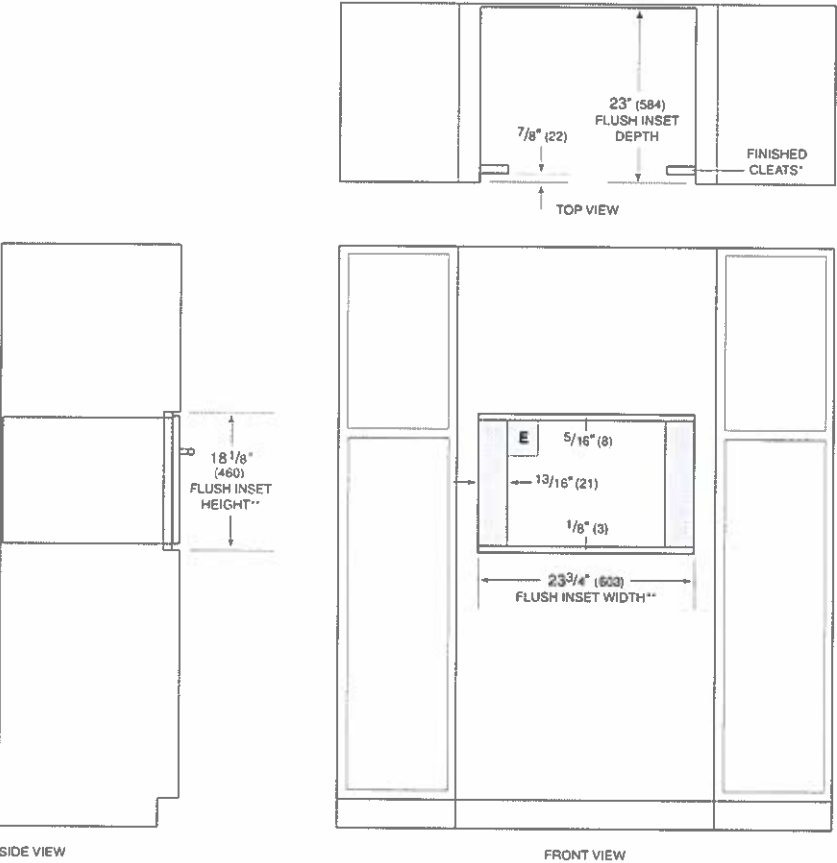

*Will be visible and should be finished to match cabinetry
**Dimension provides minimum reveals.

29.5 cu. ft. InstaView™
Door-in-Door® 4-Door
French Door Refrigerator

- 29.5 cu. ft. Capacity
- InstaView™ Door-in-Door®
- Full-Convert™ Drawer
- Dual Ice Maker with Craft Ice™
- Smart Cooling Plus™ System
- Door Cooling +
- Premium LED Lighting
- Measured Fill
- CoolGuard™ Stainless Steel Back Wall
- LG ThinQ® Technology (Wi-Fi)



COLOR AVAILABILITY

- LRMVS3006S – PrintProof™ Stainless Steel
- LRMVS3006D – PrintProof™ Black Stainless Steel

CAPACITY

Refrigerator (cu. ft.)	17.0
Full-Convert™ Drawer (cu. ft.)	3.6
Freezer (cu. ft.)	8.9
Total Capacity (cu. ft.)	29.5

ENERGY

Energy Consumption (kWh/Year)	799
ENERGY STAR® Qualified	Yes

WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
Dispenser Type	Integrated Ice & Water
Measured Fill	Yes
Dual Ice Maker	Yes, with Craft Ice™
Ice System	Slim SpacePlus®
Daily Ice Production (lbs.)	3.5 lbs.
IcePlus™ Production (lbs.)	3.8 lbs.
Craft Ice™ Daily Ice Production	0.4 lbs.
Ice Storage Capacity (lbs.)	3.0 lbs. + 3.3 lbs.
Dispenser Light	Yes
Water Filter	LT1000P (NSF-Certified*)

COOLING

Compressor Type	Linear Compressor
Dual Evaporators	Yes
Cooling System	Smart Cooling Plus™
Multi-Air Flow™ System	Yes
Door Cooling+	Yes
Temperature Sensors	9
Fresh Air Filter	Yes

CONVENIENCE

Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
LoDecibel™ Quiet Operation	Yes

REFRIGERATOR

No. of Shelves	4 Split (3 Fixed + 1 Folding)
Cantilevered Shelves	Yes
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2 Humidity Crispers
Glide N' Serve™ Pantry Drawer	Yes
CoolGuard™	Yes
Refrigerator Light	Micro Surface LED
Full-Convert™ Drawer	Yes
Dividers	Yes
Temperature Range (°F)	-7, 29, 33, 37, 41
Handle Type	SmartPull™ Handle

REFRIGERATOR DOOR

InstaView™ Door-in-Door®	Yes
Door-In-Door® with ColdSaver™ Panel	Yes
No. of Door Bins	6 (1 Adjustable Door-in-Door® Bin)
Door Bin Construction	1 Piece (Clear)

FREEZER

Freezer Type	Pull Drawer
Freezer Drawers	3-Tier Organization
DuraBase™ Solid Drawer Base	Yes
Drawer Divider	Yes
Ice Storage	Ice Maker & Ice Bin in Freezer
Freezer Light	Premium LED
Freezer Handle	SmartPull™ Handle

SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Remote Monitoring	Yes

MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Handles

ACCESSORIES

Replacement Water Filter	LT1000P
Replacement Fresh Air Filter	LT120F

TECHNICAL SPECS

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Top
Min. / Max. Water Pressure	20 – 120 psi

DIMENSIONS / CLEARANCES / WEIGHTS

Depth with Handles	38 1/8"
Depth without Handles	35 3/4"
Depth without Door	31"
Depth (Total with Door Open)	50"
Height to Top of Case	69"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	45"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 5/8"
Door Edge Clearance without Handle	2 1/4"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Approx. Weight (Product / Carton)	404 lbs. / 437 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 40"


LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear/Inverter Compressor (Parts Only)	10 Years



System tested and certified by NSF International against NSF/ANSI Standard 42, Standard 53 and Standard 401.

DIMENSIONS / CLEARANCES

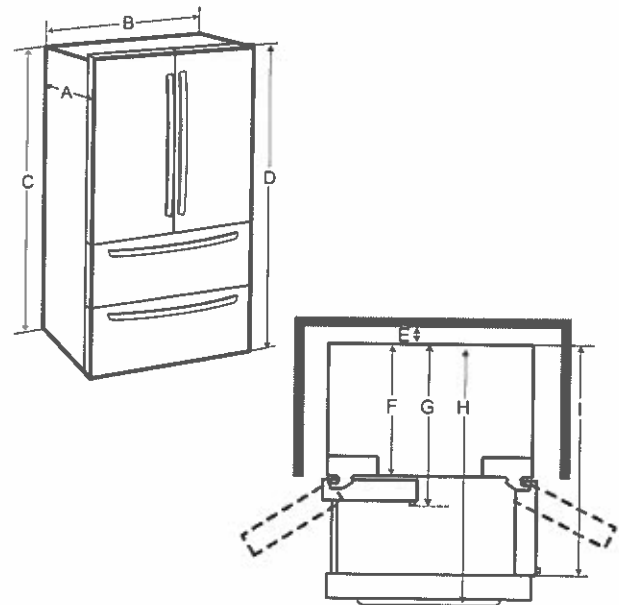

DIMENSIONS / CLEARANCES

A	Depth without Handles	35 3/4" (908 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	69" (1753 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	31" (785 mm)
G	Depth with Handle	38 1/8" (968 mm)
H	Depth (Total with Freezer Drawer Open)	59 3/8" (1508 mm)
I	Depth (Total with Door Open 90°)	50" (1270 mm)

INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.