

# GOEMANS APPLIANCES

*Expect More. Get More.*

## APPLIANCE SPECIFICATIONS



**PROJECT PARTNER:**


**SHIP TO:**  
**PATEL, REEMA**

•  
OAKVILLE, ON XXXXXX

**REMINDER:**

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Goemans Appliances assumes no liability for product specifications.

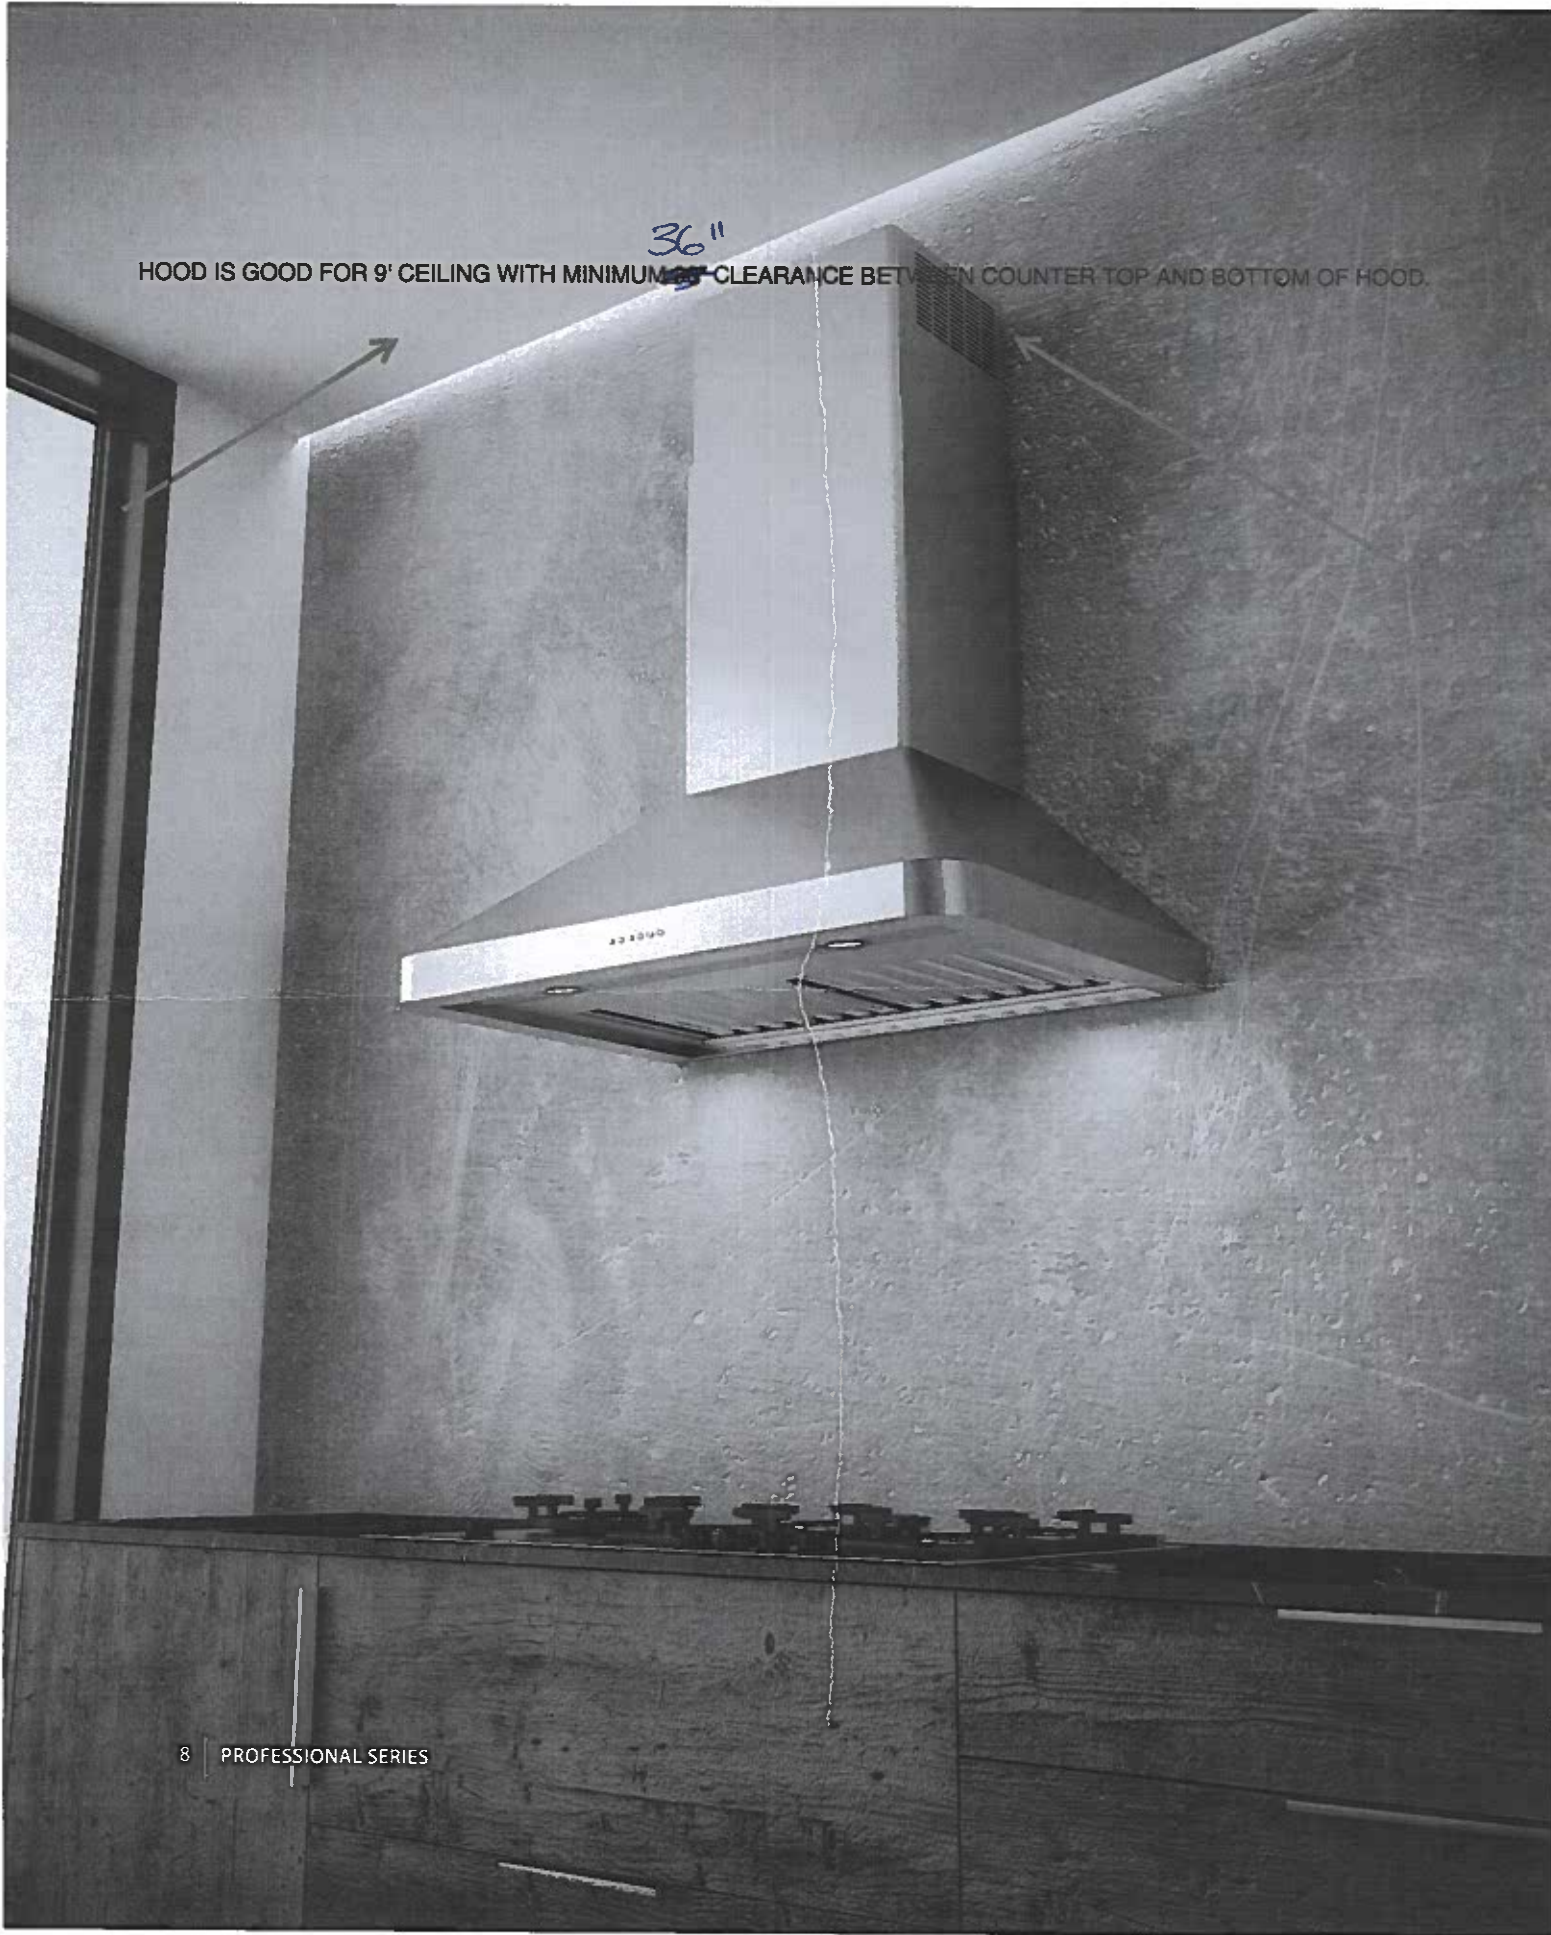


HOOD IS GOOD FOR 9' CEILING WITH MINIMUM 36" CLEARANCE BETWEEN COUNTER TOP AND BOTTOM OF HOOD.

SU5430X  
SU5436X  
SU5442X  
SU5448X

## SU 54

stainless steel AISI 430

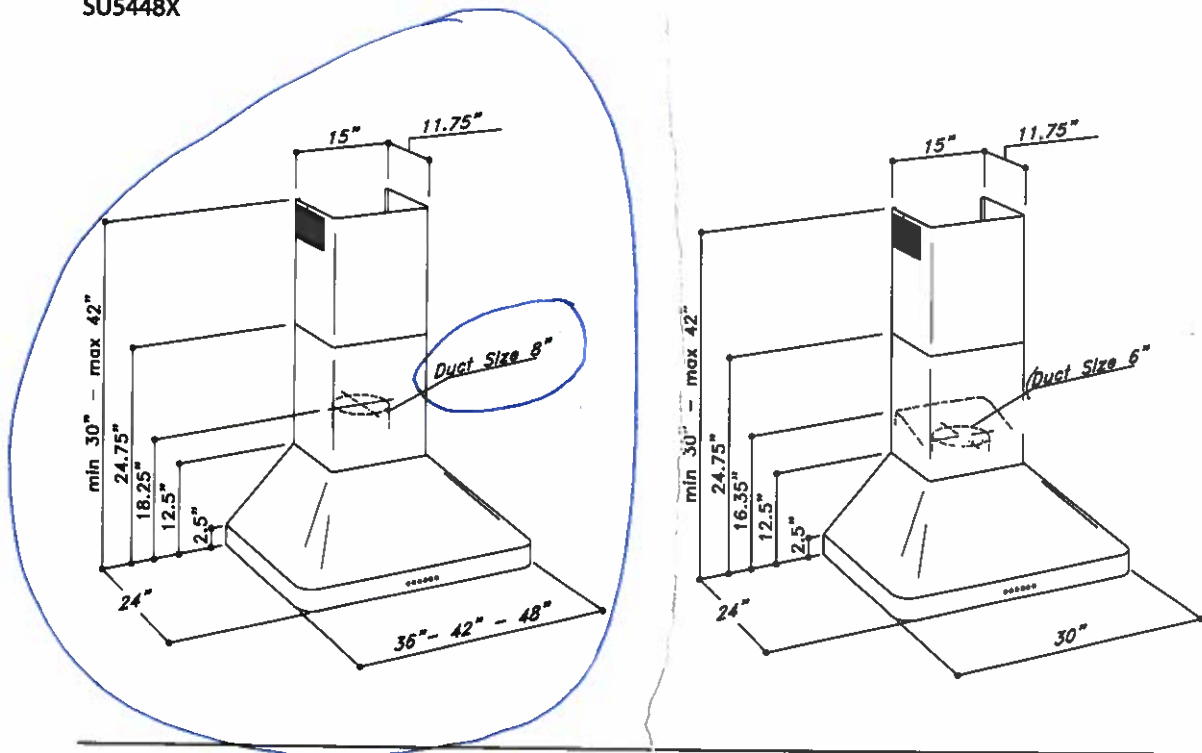

### MOTOR

Dual motor: EBM 1100 CFM for SU54 36\"42\"48\" version  
One motor: EBM 600 cfm for SU5 4 30\" version  
Pressure: 800 Pa  
Noise level: 66 dBA/5.1 sones

### LIGHTING

Led spot 2X2,1W in 30\" version  
Led spot 2x2,1W in 36\" version  
Led spot 3x2,1W in 42\" version  
Led spot 4x2,1W in 48\" version

### CONTROL PANEL

4 speed push-button + delay off timer + light switch

### GREASE FILTER

Commercial style baffle filters

### AIR OUTLET

8\" round for SU54 36\"42\"48\"  
6\" round for SU54 30\"

### DISCHARGE

Vertical

### ACCESSORIES

Charcoal filters: KF2 (Order 1 pc for 30\" version and 2 pcs for 48\" version) Cod. 60071099999  
KF7 (Order 2 pcs for 36\" and 42\" version) Cod. 60080477002  
Air deviator: Def 551 75005100105  
Flue Extension: FLUEXSU54 cod. 20001154886



50 50 27, 22



24.2 Cu. Ft. 42" Width Built-In Stainless French  
Door Refrigerator with Platinum Interior Design

KBFN502ESS

Available Finishes/Colours

 KBFN502EBS Black Stainless Steel with PrintShield™ Finish	 KBFN502EPA Panel Ready
 KBFN502ESS Stainless Steel	

Dimensions	
Depth	27 3/4
Height	83 3/8
Width	42 1/4

Controls	
LCD Touch Screen	No
Door Ajar/Open Alarm	Yes
Control Location	Interior Up Front

AHAM Volumes And Shelf Area	
Freezer Volume (Cu Ft)	6.42
Refrigerator Volume (Cu Ft)	17.75

Max Cool/Fast Cool	Yes
Sabbath Mode	Yes
Water Filter Indicator/Reset	Yes

Details	
Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance

Misc.	
Accessory Relationships	Yes
Home Delivery	Yes
Will Call	Yes



Cooling Type	Dual Evaporator
Counter Depth	Yes

Exterior	
Base Grille Color	Black
Cabinet Color	Gray
Cabinet Finish	Smooth
Door Color	Stainless Steel

Controls	
Control Type	Electronic
Air Filter Indicator/Reset	No
Automatic Defrost	Yes

Behind these built-in French doors lie performance and beauty. The Preserve® Food Care System features three technologies that work in concert to assure crisp produce and deliciously flavourful foods while helping to eliminate refrigerator odours. The glossy silver Platinum Interior Design complements the metallic accents on shelves, crisper and baskets while the SatinGlide® Crispers with Soft-Close assures their smooth operation.

Top Features
Preserve® Food Care System
Platinum Interior Design
Automatic Ice Maker

Manuals & Literature:	
 <a href="#">Dimension Guide</a>	 <a href="#">Energy Guide</a>
 <a href="#">Installation Guide</a>	 <a href="#">Owner Manual</a>
 <a href="#">Warranty Information</a>	

SAXONY

SPRBC056D1SS

Silhouette

PROFESSIONAL™

www.silhouetteappliances.com

hlec 27, 22



Seamless Capacitive  
Touch Controls



LED Perimetrical  
Lighting

## PRODUCT FEATURES



### Pro-vection Cooling

Our fan forced cooling system incorporates AO (always on) fans to continually circulate the air. Multiple sensors are used to continually adjust and provide a stable internal temperature.



### Pro Luminosity

Perimetrical lighting down the sides casts a warm glow and includes 3 different light settings



### Pro Security

Integrated door lock secures the contents

39db



Quiet operation

BENEFITS

Model #	SPRBC056D1SS
Capacity-Wine Compartment	Stores up 126 beverage cans and 6 bottles of wine
Volume	5.6 cu. ft.
Temperature Range	34F – 50F (1C-10C)
Noise	39 db
Door Frame	304 grade seamless stainless steel
Cabinet	Matte black textured steel
Interior Finish	Matte black
Door Style	Single door
Reversible Door Swing	Yes
Door Hinge	Hidden for flush fit installation
Door Glass	Low E, dual pane argon filled
Door Handle	Pro-style, 20% longer than previous model
Door Lock	Yes
Shelving Material	3 adjustable clear glass shelves
Lighting Option 1	On/Off with door opening
Lighting Option 2	On 100% illumination for 2 hours
Lighting Option 3	On 50% illumination for 2 hours
Light Colours	Choose between Arctic white or Azure blue
Controls	Digital seamless capacitive touch
Temperature Recall	Yes reverts to last set temperature after power outage
Alarm	Yes, temperature and door ajar
Sabbath Mode	Yes

PRODUCT SPECIFICATIONS

UPC	067638024273
Unit Dimensions	
Width	23.8" in.
Min. Height	34" in.
Max. Height	34.7" in.
Depth	23.8" in.
(DOES NOT INCLUDE HANDLE)	
Installation	
Gross Weight:	136 lbs.
Built-in under counter or free standing	
Refrigerator:	R600
Size:	Min 24" wide opening required
AC Power	
115V, 60Hz at MAX 1.5A	
Power cord length:	6.5 ft.
Platinum Warranty	
2 year parts and labor coverage	

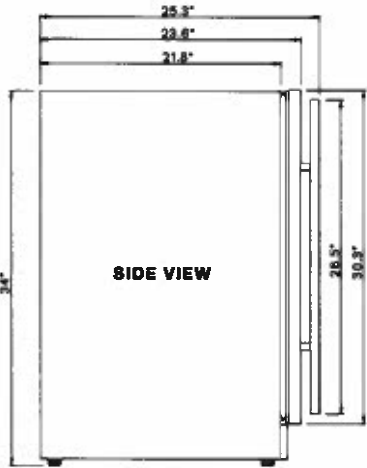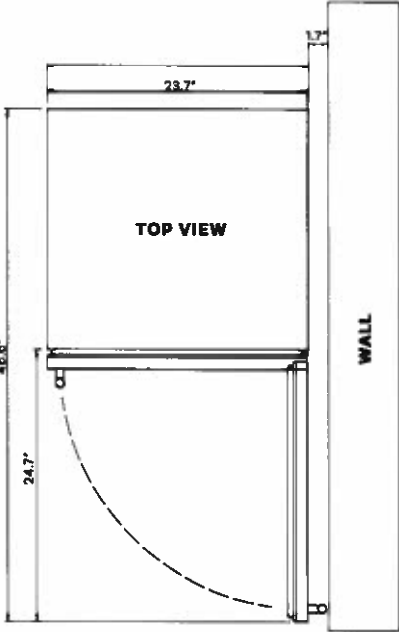

\*based on standard 750ml bordeaux style bottle

# INSTALLATION INSTRUCTIONS

## PREPARING THE ENCLOSURE

Gloves and safety goggles should be worn during installation.

It is not recommended to install the appliance into a corner or directly beside a wall. The door will need to be opened more than 90° to allow full extension of the shelves. If it is necessary to place the unit next to a wall or in a corner, leave at least 2-4 inches (5-10 cm) of space between the wall and the appliance to allow for the door opening.



The cabinet opening must be at least 24 inches (61 cm) wide by 35 inches (88.9 cm) high by 25 inches (63.5 cm) deep.

**Note:** The listed depth requirement is assuming that the electrical outlet is located in the adjacent cabinetry or flush mounted in the rear wall, not surface mounted inside the enclosure.

If the electrical outlet is located inside adjacent cabinetry, cut a 1.5 inch (3.8 cm) diameter hole to admit the power cord. If the cabinet wall is metal, the hole edge must be covered with a bushing or grommet.

## REQUIRED TOOLS

- Safety goggles
- Gloves
- Tape measure
- Carpenter square
- Level
- Flashlight
- Electric drill with hole bit

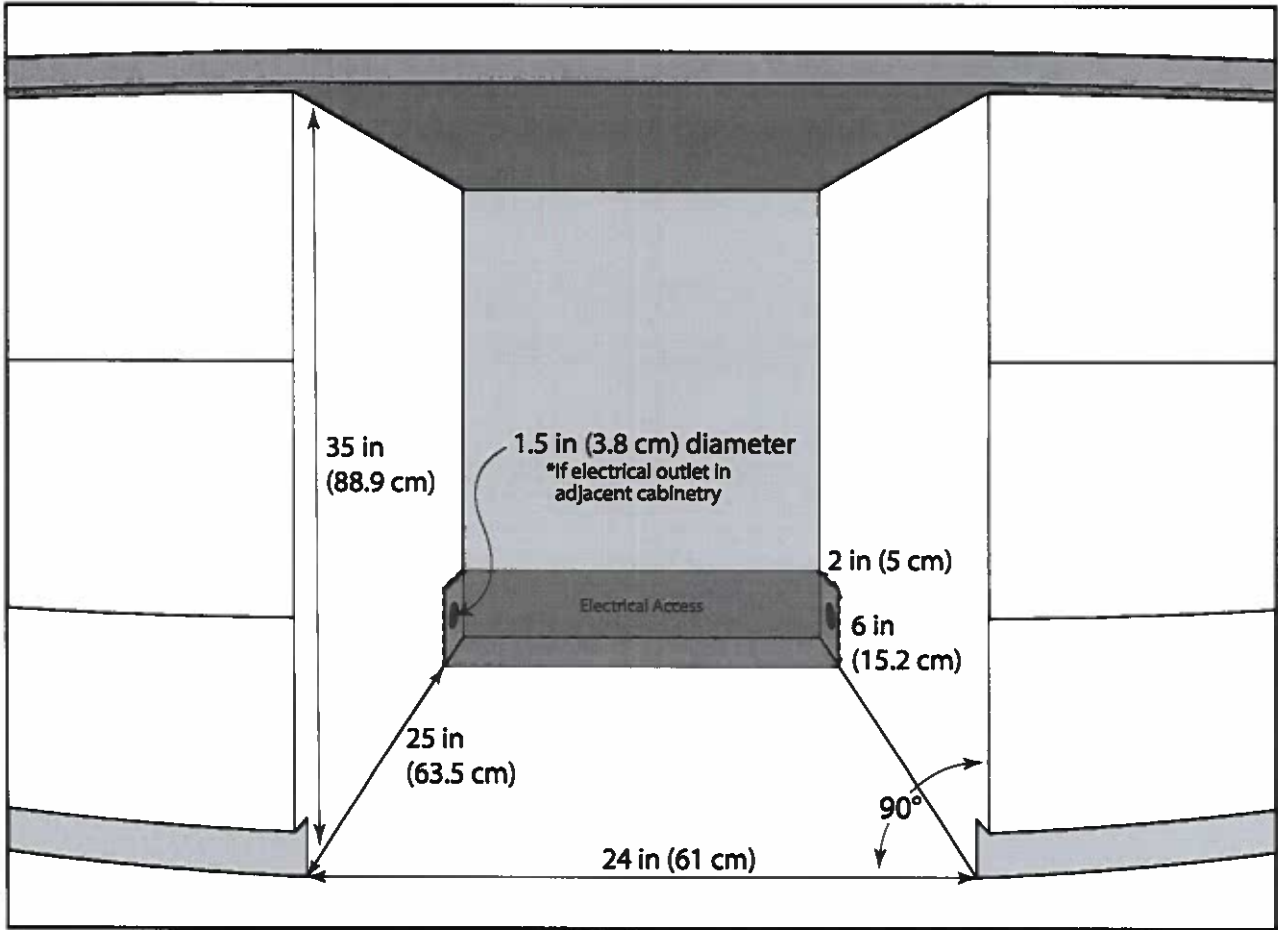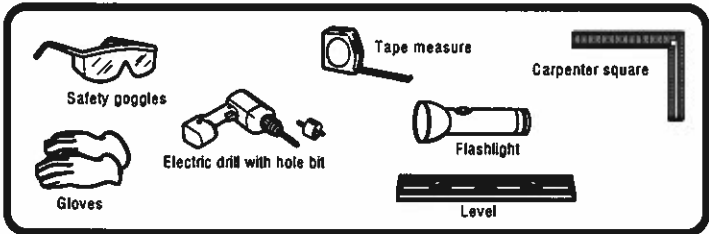



**PRODUCT MODEL NUMBERS**

KBBL206E	KBBR306E	KBFN502E
KBBL306E	KBFN402E	KBFN506E
KBBR206E	KBFN406E	

**IMPORTANT:** Observe all governing codes and ordinances.

**Electrical:** A 115 Volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

A grounded 3 prong electrical outlet should be placed within 4" (10.2 cm) of the right side cabinets or end panel.

**Location:** Do not install in a location where the temperature will fall below 55°F (13°C). It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.

Floor must support the refrigerator weight, more than 600 lbs. (272 kg), door panels, and contents of the refrigerator.

Ceiling height must allow for side tipping radius. See "Tipping Radius."

Location should permit door to open fully. See "Door Swing Dimensions."

Location must permit top grille removal. See "Opening Dimensions."

**Water Supply:**

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


**Reverse Osmosis Water Supply**

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

All installations must meet local plumbing code requirements.

The water shutoff should be located in the base cabinet on either side of the refrigerator or some other easily accessible area. The right-hand side is recommended. The access hole through the cabinet must be within 1/4" (12.7 mm) of the rear wall.


**NOTE:** If the water shutoff valve is in the back wall behind the refrigerator, it must be at an angle so that the tube is not kinked when the refrigerator is pushed into its final location.

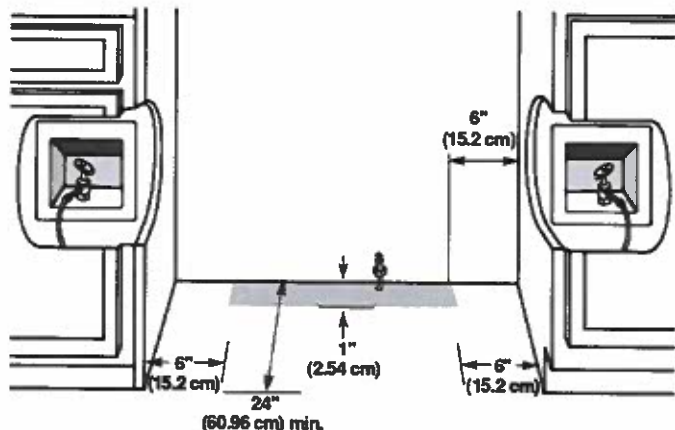

**DOOR SWING DIMENSIONS**

The location must permit the door to open a minimum of 90°. Allow 4 1/4" (11.4 cm) minimum space between the side of the refrigerator and a corner wall.


**NOTE:** More clearance may be required if you are using overlay panels or custom handles.

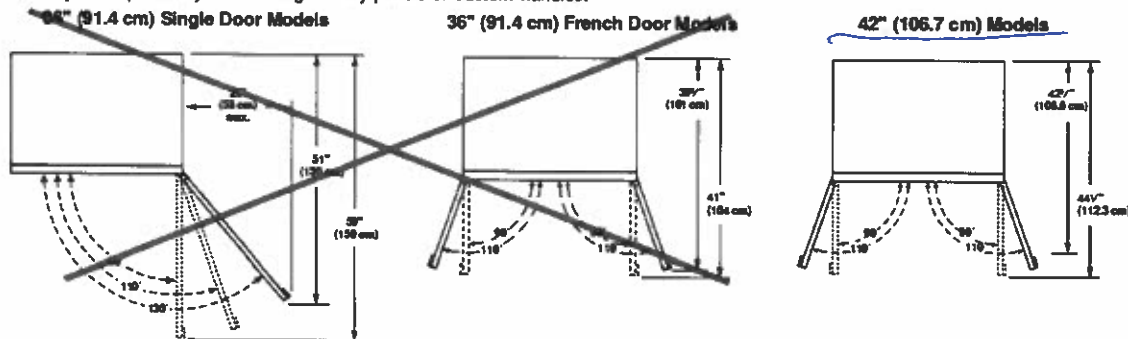

**PRODUCT DIMENSIONS**


Height dimensions are shown with the leveling legs extended to 1/4" (3 mm) below the rollers.

Width dimensions were measured from trim edge to trim edge.

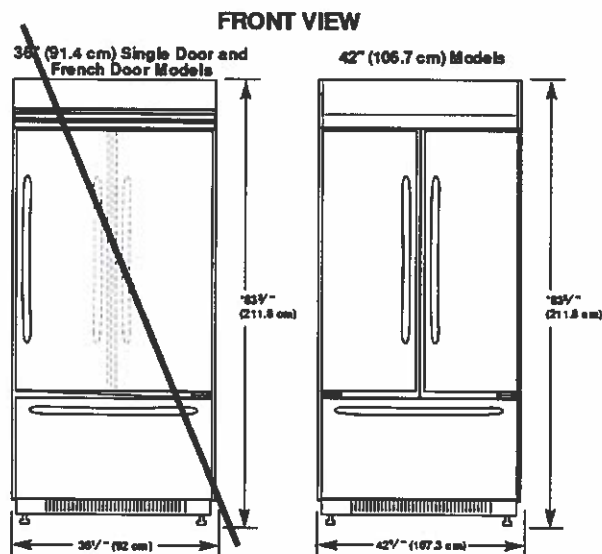


\* When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/4" (2.9 cm) to the height dimensions.

**SIDE VIEW**

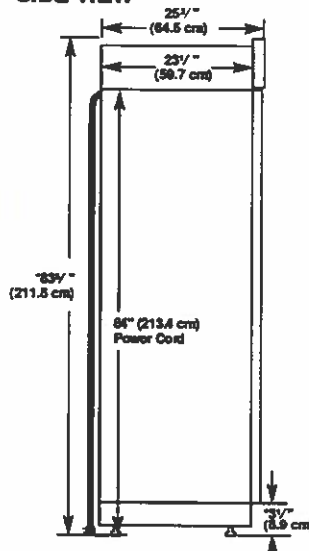

**TOP VIEW**



The water line attached to the back of the refrigerator is 5' (1.5 m) long.



## Lot 50

**NOTE:** Do not remove the foam gasket on top of the compressor cover unless removal is necessary to fit the unit under a soffit. Removal of the gasket will cause loss in cooling efficiency.



**NOTE:**  
Flooring under refrigerator must be at same level as the room.

The dolly wheel height must be added to the tipping radius when a dolly is used. If needed, the tipping radius can be reduced. See "Reduce Tipping Radius."



Yot50

RP

AP

Dec. 27, 22



Microwave Ovens


Countertop

Countertop NN-ST785S

MODEL & SIZE	Model Number	NN-ST785S
	Type	Family-size
	Installation	Countertop or built-in
	Oven Capacity	1.6 cu. ft.
	Cooking Power	1200W
	Turntable Diameter	380mm
PANASONIC TECHNOLOGY	Panasonic Inverter	Cyclonic Inverter
	Genius Sensor	Genius®
DESIGN	Colour	Stainless Steel
	Control Panel	Full Button (Chrome)
	Display Panel	New 4 Digit + Icon LCD / Blue
STYLE	Door Window	Smoked Glass
	Door Release	Push Open
	Oven Interior	Paint White
PERFORMANCE	Multi-stage Cooking	3 stage

OXOT 30

PROGRAMMABLE FEATURES		Sensor Cook	Yes
		Sensor Reheat	Yes
		Auto Cook / Reheat	Yes
		More / Less Control	Yes
		Inverter Turbo Defrost	Yes
		Keep Warm Button	Yes
		Popcorn Button	Yes
		Quick Minute	Yes
SPECIFICATIONS		Cavity Dimensions (W x D x H)	Approx. 418 x 470 x 228 mm 15.7 x 18.5 x 8.3 inch
		Unit Dimensions (W x D x H)	555 x 493 x 304 mm 21.9 x 19.4 x 12 inch
		Carton Dimensions (W x D x H)	627 x 540 x 360 mm
ACCESSORIES	TRIM KITS	27" Model Number	NN-TK722S
		30" Model Number	NN-TK732S
	Accessory		Glass Tray

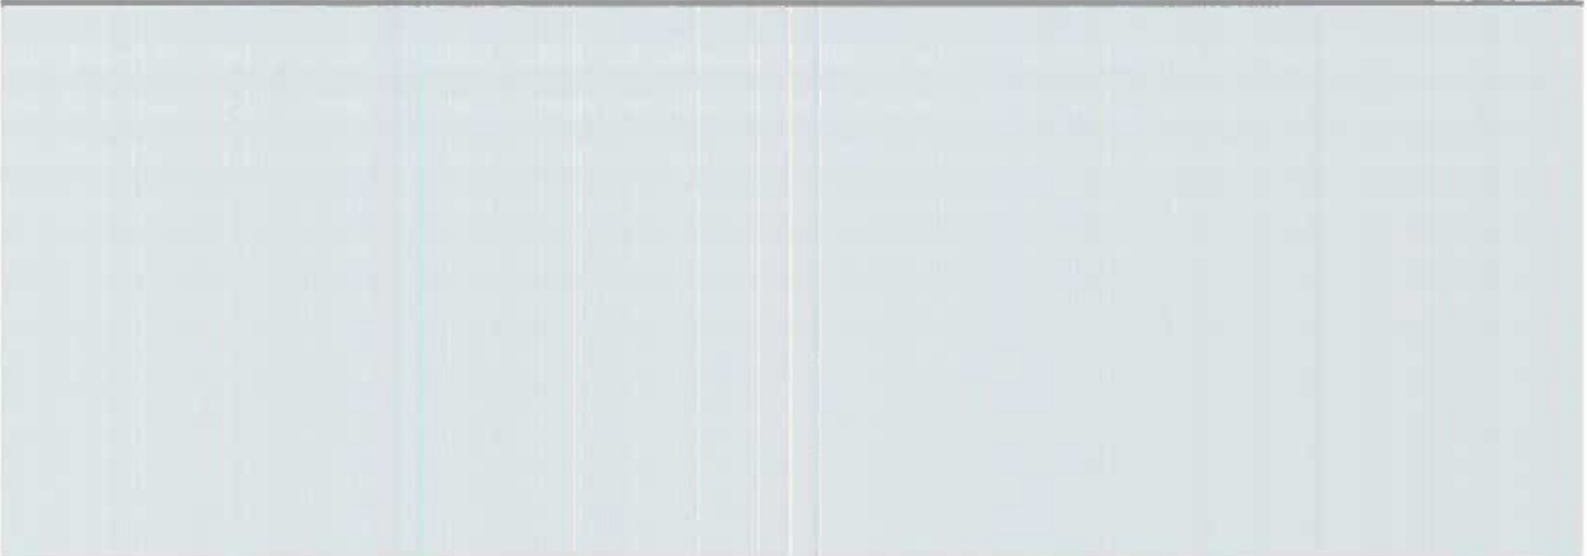




Lot 50

RP

AP

Mec 27/22

Panasonic

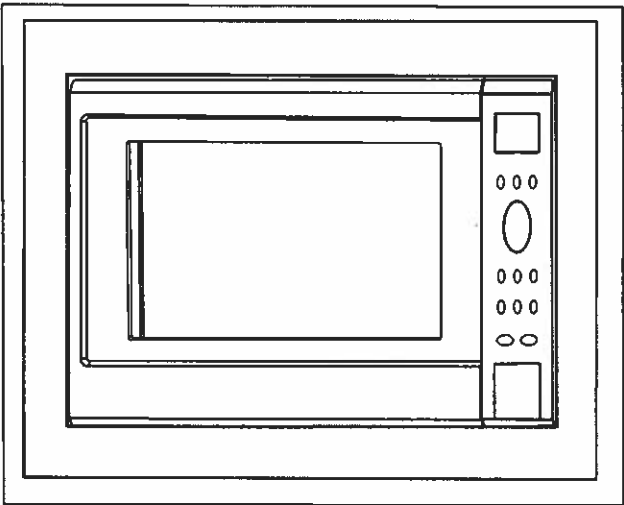

**Installation Instructions**  
**Notice d'installation**  
**Instrucciones para la instalación**



Cabinet Armoire Gabinete	Trim kit Nécessaire d'encastrement Juego de acabados
24" (596 mm) 24 po (596 mm)	NN-TK714S


Read carefully and keep these installation instructions.  
Lisez attentivement et conservez cette notice d'installation.  
Lea cuidadosamente y guarde este instructivo de  
instalación para su referencia.

© Panasonic Appliances Microwave Oven (Shanghai) Co., Ltd. 2014





2. Installation Diagram  
2. Schéma d'installation  
2. Diagrama de instalación

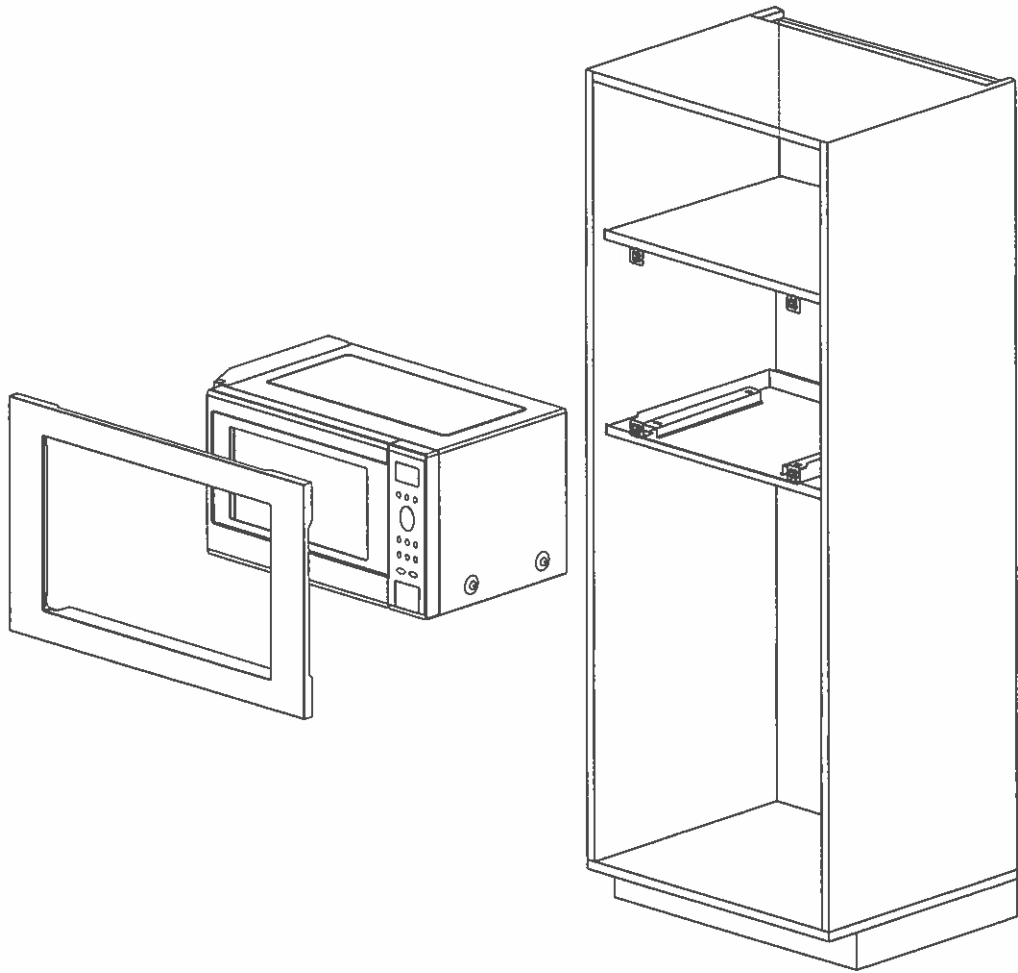

Trim Kit Dimensions	
Width	596 mm (23½")
Height	410 mm (16⅝")
Depth (Thickness)	20 mm (¾")

Dimensions du nécessaire d'encastrement	
Largeur	596 mm (23½ po)
Hauteur	410 mm (16 ⅝ po)
Profondeur (épaisseur)	20 mm (¾ po)

Dimensiones del juego de acabados	
Ancho	23½" (596 mm)
Altura	16⅝" (410 mm)
Profundidad (grosor)	¾" (20 mm)

36" GAS RANGE - 6 BURNERS

GR366



FEATURES

Control temperature precisely with six dual-stacked, sealed gas burners for higher highs, lower lows

Enjoy quicker heat and more even cooking with this large capacity gas convection oven

Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans

Produce crisper crusts and faster sears with the powerful infrared interior broiler

Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety

Move pots and pans easily across continuous cast-iron grates

Find your kitchen style with a choice of iconic red, black, or brushed stainless steel control knobs

ACCESSORIES

2-Burner Wok Grate

Bake Stone Kit

Filler Trim

Front Leg Covers

Full-Extension Ball Bearing Rack

Stainless Steel Kickplate


Stainless steel, brass or chrome bezels

High altitude conversion kits available

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).

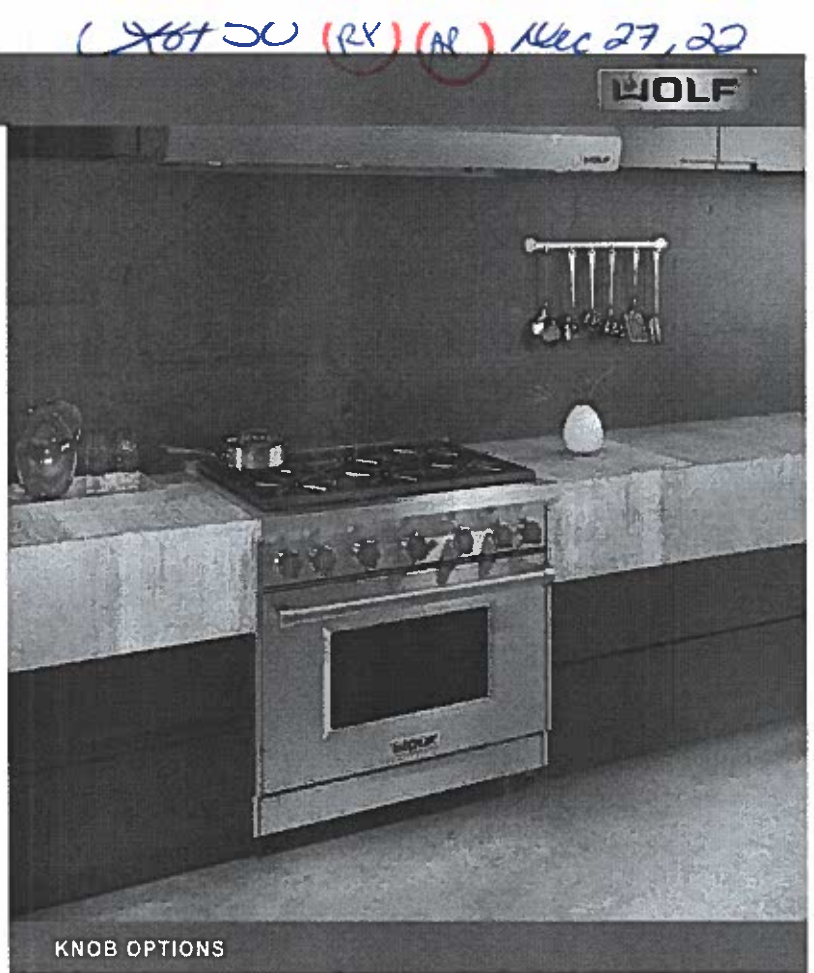

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 5 - 15,000 Btu burners


OVEN INTERIOR SPECIFICATIONS

- 30,000 Btu oven burner
- 18,000 Btu oven broiler


## PRODUCT SPECIFICATIONS

Model	GR366
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu. ft.
Oven 1 Overall Capacity	5.5 cu. ft.
Door Clearance	19 1/2"
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type

## ELECTRICAL




## GAS




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

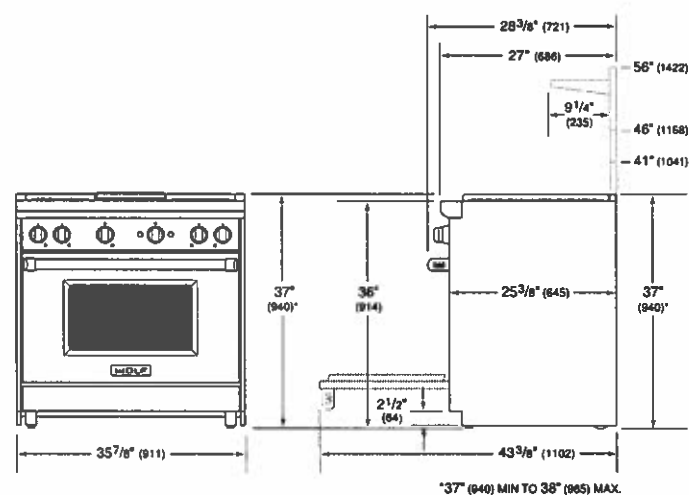

## STANDARD INSTALLATION

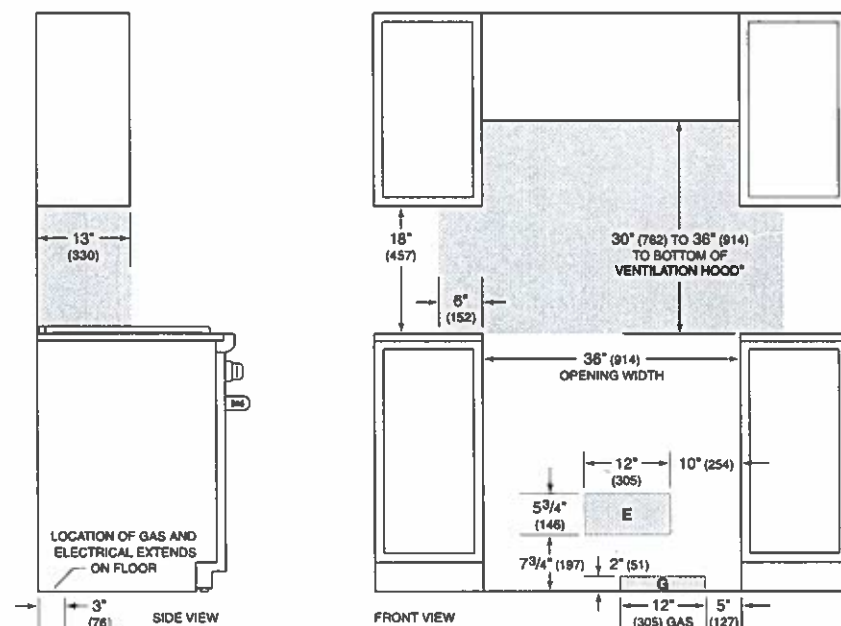

*\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.