

Not 52 M17 BS
Dec 19, 22

BUILT-IN ELECTRIC OVEN AND MICROWAVE OVEN COMBINATION OWNER'S MANUAL ENSEMBLE FOUR ÉLECTRIQUE/FOUR À MICRO- ONDES ENCASTRÉ MANUEL DU PROPRIÉTAIRE

Table of Contents/Table des matières

BUILT-IN MICROWAVE/OVEN COMBO SAFETY	2	SÉCURITÉ DE L'ENSEMBLE FOUR ÉLECTRIQUE/FOUR À	
Built-In Microwave/Oven Combination Safety	2	MICRO-ONDES ENCASTRÉ	16
MICROWAVE OVEN MAINTENANCE AND CARE	5	Sécurité de l'ensemble four électrique/four à micro-ondes	
General Cleaning	5	encastré	16
Self-Cleaning Cycle	6	ENTRETIEN ET RÉPARATION DU FOUR À MICRO-	
Steam Clean (On Some Models)	7	ONDES	20
INSTALLATION INSTRUCTIONS	7	Nettoyage général	20
REQUIREMENTS	7	Programme d'autonettoyage	21
Tools and Parts	7	Steam Clean (nettoyage à la vapeur) (sur certains	
Location Requirements	7	modèles)	22
Electrical Requirements	9	INSTRUCTIONS D'INSTALLATION	23
INSTALLATIONS	10	SPÉCIFICATIONS	23
Prepare Built-In Oven	10	Outils et pièces	23
Remove Oven Door(s)	10	Exigences d'emplacement	23
Replace Oven Door(s)	10	Spécifications électriques	25
Make Electrical Connection	11	INSTALLATION	26
Install Oven	12	Préparer le four encastré	26
Complete Installation	15	Enlever la/les porte(s) du four	26
		Réinstallation de la/des porte(s) du four	27
		Raccordement électrique	27
		Installation du four	29
		Achever l'installation	32



IMPORTANT:

Save for local electrical inspector's use.



IMPORTANT :

À conserver pour consultation par l'inspecteur local des installations électriques.

Lot 52

Cabinet Dimensions — Built-in Microwave/Oven Combination
Standard Installation

The front face of the cleats and platform will be visible and should be treated as a finished surface.

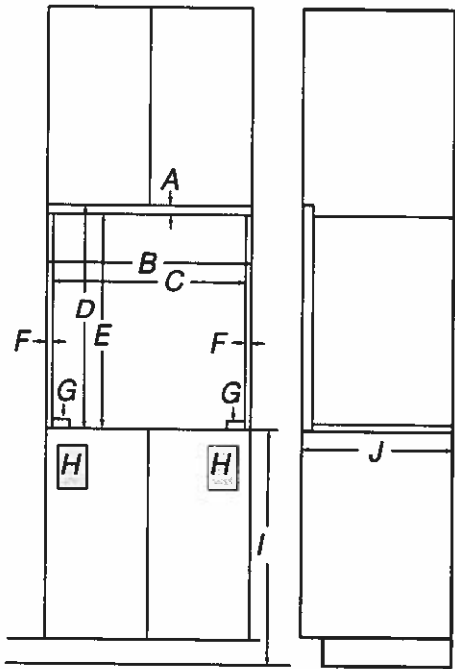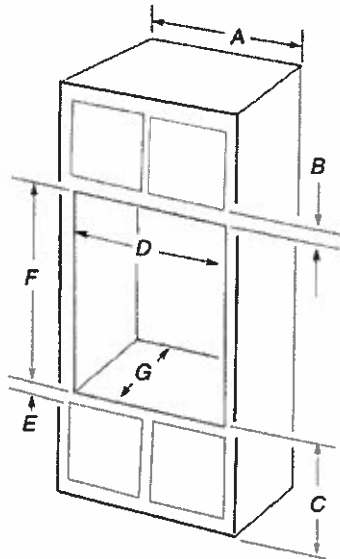

- | | |
|--|--|
| 27" (68.6 cm) models | 30" (76.2 cm) models |
| A. 27" (68.6 cm) minimum cabinet width | A. 30" (76.2 cm) minimum cabinet width |
| B. 2 1/4" (5.7 cm) top of cutout to bottom of upper cabinet door | B. 2 1/4" (5.7 cm) top of cutout to bottom of upper cabinet door |
| C. 19 1/4" (48.9 cm) bottom of cutout to floor is recommended. | C. 19 1/4" (48.9 cm) bottom of cutout to floor is recommended. |
| 7"-19 1/4" (17.8-48.9 cm) bottom of cutout to floor is acceptable. | 7"-19 1/4" (17.8-48.9 cm) bottom of cutout to floor is acceptable. |
| D. 25 1/2" minimum (64.8 cm) cutout width | D. 28 1/2" (72.4 cm) minimum cutout width |
| E. 1 1/2" (3.8 cm) minimum bottom of cutout to top of cabinet door | E. 1 1/2" (3.8 cm) minimum bottom of cutout to top of cabinet door |
| F. 41 5/16" (105 cm)* recommended cutout height | F. 41 5/16" (105 cm)* recommended cutout height |
| G. 24" (60.7 cm) cutout depth | G. 24" (60.7 cm) cutout depth |

***NOTE:** The cutout height can be between 41 1/8" (104.5 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

Flush Installation

A 25" (63.5 cm) minimum cutout depth is required.
 These dimensions will result in a 1/4" (6 mm) reveal on the top, a 1/4" (6 mm) reveal on the sides, and a 1/8" (3 mm) reveal on the bottom of the wall oven.


Front View

Side View

- | | |
|---|---|
| 27" (68.6 cm) models | 30" (76.2 cm) models |
| A. 5/8" (1.6 cm) top cleat* | A. 5/8" (1.6 cm) top cleat* |
| B. 27 1/4" (69.2 cm) minimum width of flush inset cutout | B. 30 1/4" (76.8 cm) minimum width of flush inset cutout |
| C. 25 7/8" (65.7 cm) minimum width of opening | C. 28 7/8" (73.3 cm) minimum width of opening |
| D. 43 1/2" (110 cm) minimum height of flush inset cutout | D. 43 1/8" (110 cm) minimum height of flush inset cutout |
| E. 42 1/2" (107.9 cm) recommended cutout height | E. 42 1/2" (107.9 cm) recommended cutout height |
| F. 11/16" (1.7 cm) side cleat* | F. 11/16" (1.7 cm) side cleat* |
| G. 1/2" x 2" (1.3 cm x 5.1 cm) spacer the entire depth of the cutout* | G. 1/2" x 2" (1.3 cm x 5.1 cm) spacer the entire depth of the cutout* |
| H. Recommended junction box location | H. Recommended junction box location |
| I. 4 5/8" - 19 1/4" (11.7 - 48.9 cm) bottom of cutout to floor | I. 4 5/8" - 19 1/4" (11.7 - 48.9 cm) bottom of cutout to floor |
| J. 25" (63.5 cm) minimum depth of cutout | J. 25" (63.5 cm) minimum depth of cutout |

* Cleats and spacers must be recessed 1 3/8" (3.5 cm) from the front of the cabinet.

Lot 52

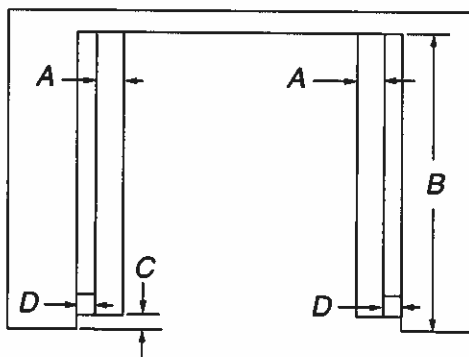

Top View

27" (68.6 cm) models

- A. 1/2" x 2" (1.3 cm x 5.1 cm) spacer the entire depth of the cutout*
- B. 25" (63.5 cm) depth of cutout
- C. 1 1/2" (3.5 cm) recess from front of cabinet
- D. 11/16" (1.7 cm) side cleat*

30" (76.2 cm) models

- A. 1/2" x 2" (1.3 cm x 5.1 cm) spacer the entire depth of the cutout*
- B. 25" (63.5 cm) depth of cutout
- C. 1 1/2" (3.5 cm) recess from front of cabinet
- D. 11/16" (1.7 cm) side cleat*

* Cleats and spacers must be recessed 1 3/8" (3.5 cm) from the front of the cabinet.

Electrical Requirements

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:


National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

Electrical Connection

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage, amperage, and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 V (6.3 to 8.3 kW at 208 V) require a separate 40 A circuit. Models rated from 4.9 to 7.2 kW at 240 V (4.3 to 6.2 kW at 208 V) require a separate 30 A circuit. Models rated at 4.8 kW and below at 240 V (4.2 kW and below at 208 V) require a separate 20 A circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See the "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below: Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum. Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices. Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances. A copy of the above code standards can be obtained from: National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575.

FRIGIDAIRE.

Lot 52

MA BS

Dec. 19, 22

Beverage Center

FFBC4622QS

4.6 Cu. Ft.



Product Dimensions

Height	34"
Width	21-1/2"
Depth (Incl. Door / Incl. Handle)	22-3/8" / 24-1/2"
Depth with Door Opened 90°	43"

More Easy-To-Use Features

Lock with Pop-Out Key

The key automatically ejects after locking the door so you won't leave it in the door.

Contemporary Handle Design

Convenient access to your beverage collection.

Ready-Select® Controls

Easily select options with the touch of the a button.

Freestanding Installation

Static Condenser

F° or C° LED Display

Power-On/Off Control

Tinted Window

Adjustable Leveling Legs

Available in:



Stainless
(S)

Signature Features

Precision Electronic Temperature Control with LED Digital Display

Set a temperature anywhere between 33°—50°F — the Beverage Center will maintain selected temperature for ice cold beverages.

138 - 12 oz. Can Storage

Holds up to 138 - 12 oz. cans for maximum storage of your favorite beverages.

Reversible Door Swing Option


Door can be installed to open left or right based on your needs.

Stainless Steel Door with Tinted Window

High-quality look to complement your room and beverage collection.

frigidaire.com

Features	
Cubic Feet (Cu.Ft.)	4.6
Bottle/Can Capacity	138 12 oz. Cans
Exterior	
Door Color	Stainless Steel
Cabinet Color	Black
Window Type	Tinted
Door Handle	Top Front-Mounted
Reversible Door	Yes
Adjustable Leveling Legs	Yes
Interior	
Control Type	Electronic
Display	F° or C° LED
Lighting	Exhibit
Manual Control Lighting	Yes
Condenser	Static
High-Temperature Acoustic Alarm	Yes
Illumination System	LED
Power-On/Off Control	Yes
Temperature Zones	1
Temperature Range	33°F to 50°F
Shelves	3 Spacewise® Adjustable Glass
Cabinet Liner	Black
Specifications	
Power Supply Connection Location	Lower RH Rear Corner
Voltage Rating	120V/60Hz/15A
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	101 Lbs.
Installation Type	Freestanding

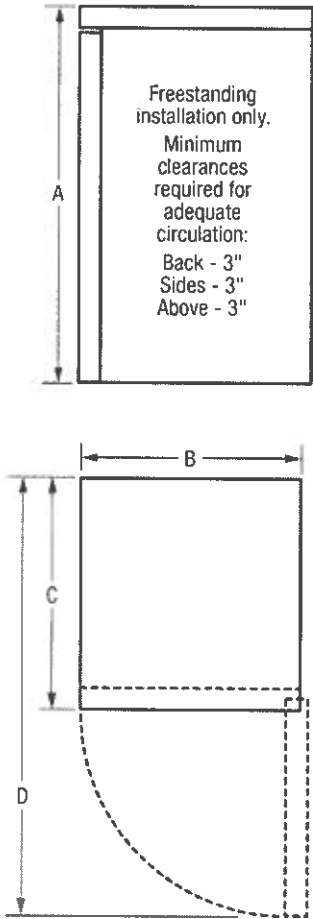

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Height	34"
B - Width	21-1/2"
C - Depth (Incl. Door/Incl. Handle)	22-3/8"/24-1/2"
D - Depth with Door Open 90°	43"

Accessories information available on the web at frigidaire.com

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FFBC4622Q 01/14

© 2014 Electrolux Home Products, Inc.

Specifications subject to change.

36" Induction Cooktop

Benchmark® Series – Black NITP660UC

Not 52
Dec. 19, 22



BOSCH
Invented for life



NITP660UC
Black

Also available in:
Black with NITP660SUC
Stainless Steel Frame

FlexInduction® cooktop allows you to place your cookware wherever you want on the flexible cooking zone.

Features & Benefits

- FlexInduction® – provides even more flexibility by combining two cooking zones into one larger zone
- 12" dual-ring center cooking zone for large pots and pans
- PowerMove™ – divides FlexInduction® into 3 preset power level zones. Simply move the cookware to change the power level
- Home Connect™ – the easy way to connect your smart device with your Bosch cooktop

Element Performance

Power of Full Zone Left & Right heating element	3,300 W
Power of Full Zone Left & Right heating element (in boost)	3,600 W
Power of Front Left heating element	2,200 W
Power of Front Left heating element (in boost)	3,600 W
Power of Back Left heating element	2,200 W
Power of Back Left heating element (in boost)	3,600 W
Power of Center heating element	3,300 / 2,200 W
Power of Center heating element (in boost)	3,600 / 3,400 W
Power of Back Right heating element	2,200 W
Power of Back Right heating element (in boost)	3,600 W
Power of Front Right heating element	2,200 W
Power of Front Right heating element (in boost)	3,600 W
Burners with booster	All*

Element Size

Dimension of Front Left heating element	7" x 8"
Dimension of Back Left heating element	7" x 8"
Dimension of Center heating element	12", 9"
Dimension of Back Right heating element	7" x 8"
Dimension of Front Right heating element	7" x 8"

General Properties

Home Connect™ (Wi-Fi Enabled)	Yes
Controls	PreciseSelect® Touch

Technical Details

Watts	12,000 W
Circuit breaker	50 A
Volts	208-240 V
Frequency	60 Hz
Plug type	No plug
Power cord length	37"
Energy source	Electric

Dimensions & Weight

Overall appliance dimensions (HxWxD)	4 1/8" x 37" x 21 1/4"
Required cutout size (HxWxD)	4 1/8" x 34 7/8" x 20"
Minimum distance from counter front	2 1/4"
Minimum distance from rear wall	2"
Net weight	56 lbs

Accessories—Optional



HEZ390210
8" AutoChef® pan



HEZ390220
9" AutoChef® pan



HEZ390230
10" AutoChef® pan



HEZ390512
Teppanyaki



HEZ9GR37UC
17" Non-Stick Induction Grill



*For 36" model Boost function may be used simultaneously in 3 zones only. See User Manual.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.





Lot 52

36" Induction Cooktop

Benchmark® Series – Black NITP660UC



Installation Details

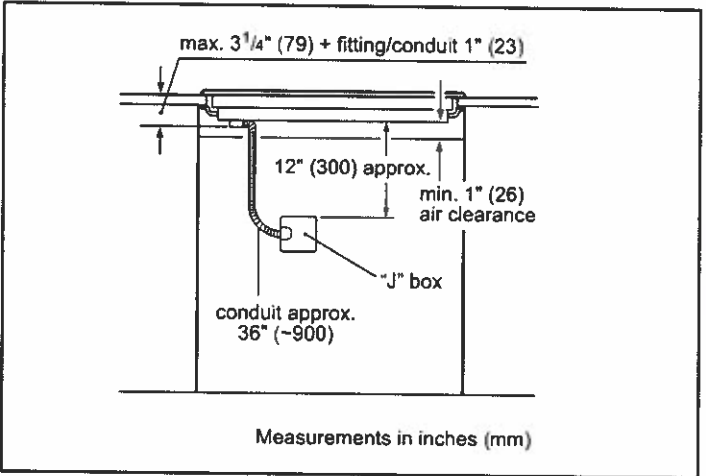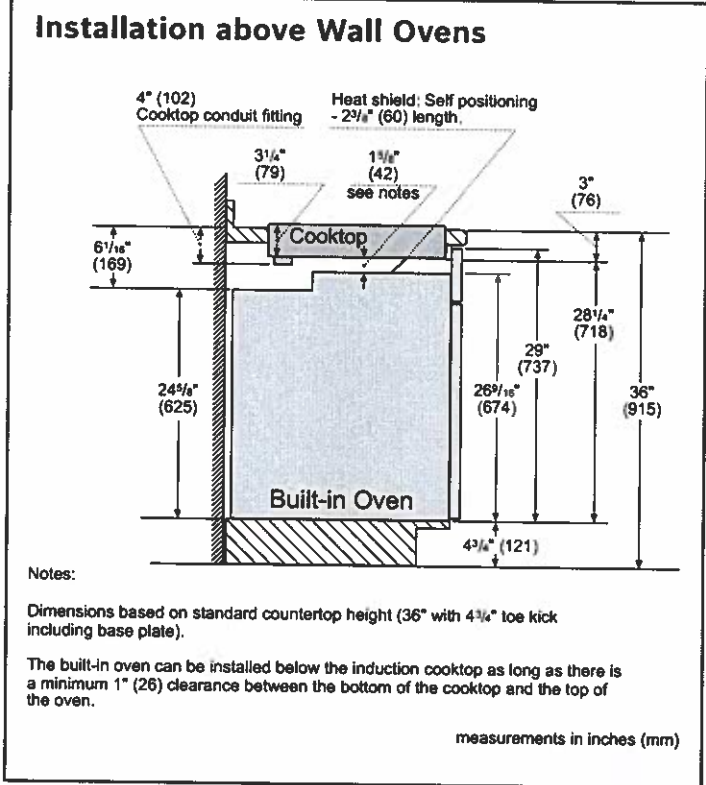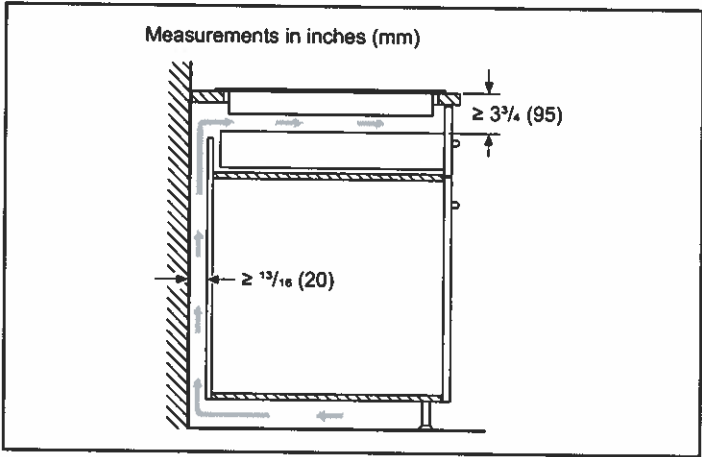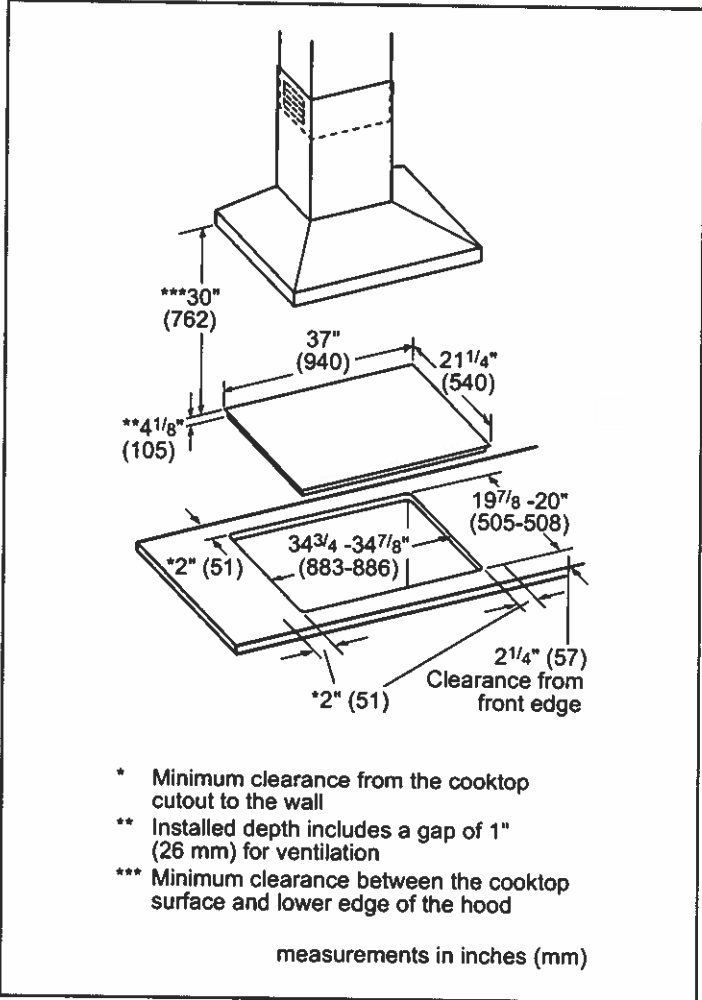

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

24" Custom Panel Dishwasher

Benchmark Series – Custom Panel SHV89PW73N

Xot52

Dec 19, 22



BOSCH
Invented for life



SHV89PW73N
Custom Panel

The flexible 3rd rack allows you to accommodate deeper items, while adjustable tines let you customize the rack's loading space.

Features & Benefits

39 dBA: Quietest dishwasher brand in North America.*

A flexible 3rd rack with folding tines adds 30% more loading area.

A clean white light illuminates the interior when open.

Telescopic Rails provide a smooth glide for easier unloading and loading on all 3 levels.

Water Softener ensure optimally spot-free and shiny dishes.


General Properties	
Number of wash cycles	7
Number of options	7
dBA	39
Third rack	Flexible Third Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	TFT Touch Control
Concealed heating element	Yes
Leak protection system	24/7 AquaStop® Plus
Water softener	Yes
Five-level wash	Yes
ChildLock	No
Special features	Telescopic Glides on all 3 levels, Stainless Steel Toekick

Efficiency	
Water usage per cycle	2.9
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5

Capacity	
Number of place settings	15
Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	N/A
Minimum water pressure (lb/sin)	7
Length inlet hose (in)	55"
Length outlet hose (in)	63"
Dimensions & Weight	
Overall appliance dimensions (HxWxD)(in)	34 1/16" x 23 9/16" x 21 5/8"
Required cutout size (HxWxD)(in)	34 1/8" x 24" x 24"
Adjustable feet	Yes
Net weight (lbs)	118 lbs

Accessories—Optional	
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Softener Salt (4.4 lbs)	SGZ9091UC
Stainless Steel Door with Stainless Steel Straight Bosch Bar Handle	SHZ1008UC
Stainless Steel Straight Bosch Bar Handle	SMZ1007UC
Anti-Tarnish Silverware Cassette	SMZ5002UC
Power Cord with Cold Plug	SMZPC002UC

* Based on an average of sound ratings of 24" Full Size Stainless Steel Tub dishwashers contained in major brands US & Canadian websites. Major brands defined as TraQline Top 5 Market Share (US & Canada) December 2016.



For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904






© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

24" Custom Panel Dishwasher

Benchmark Series – Custom Panel SHV89PW73N



Installation Details

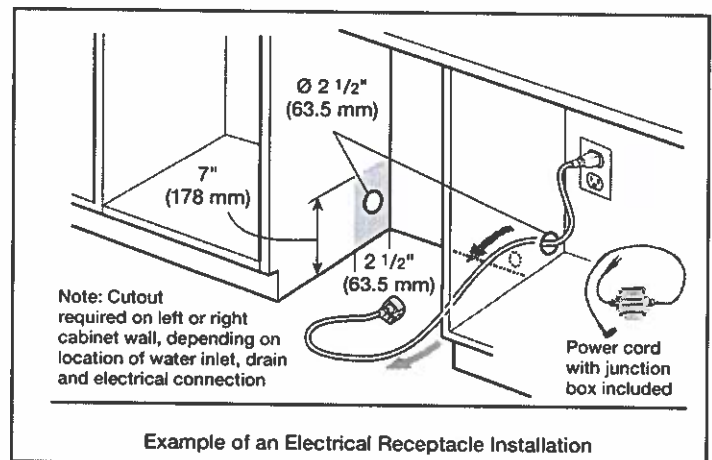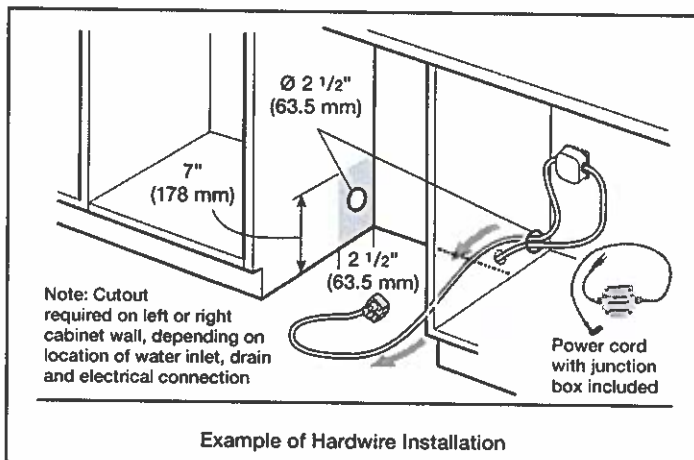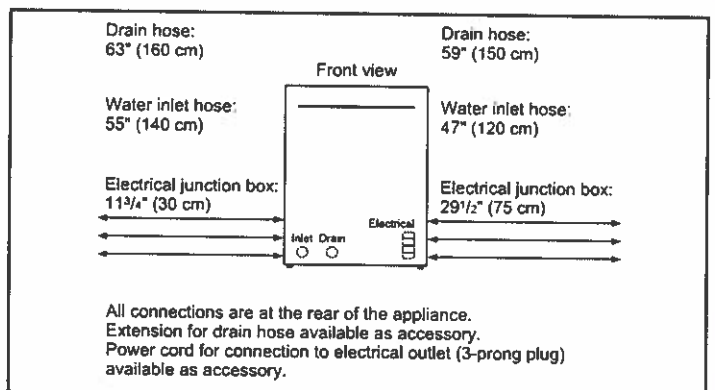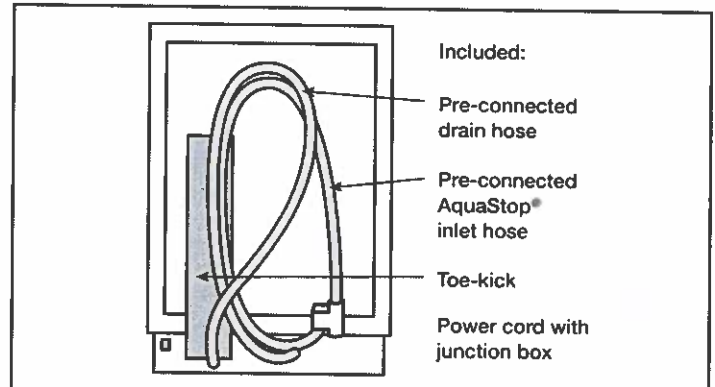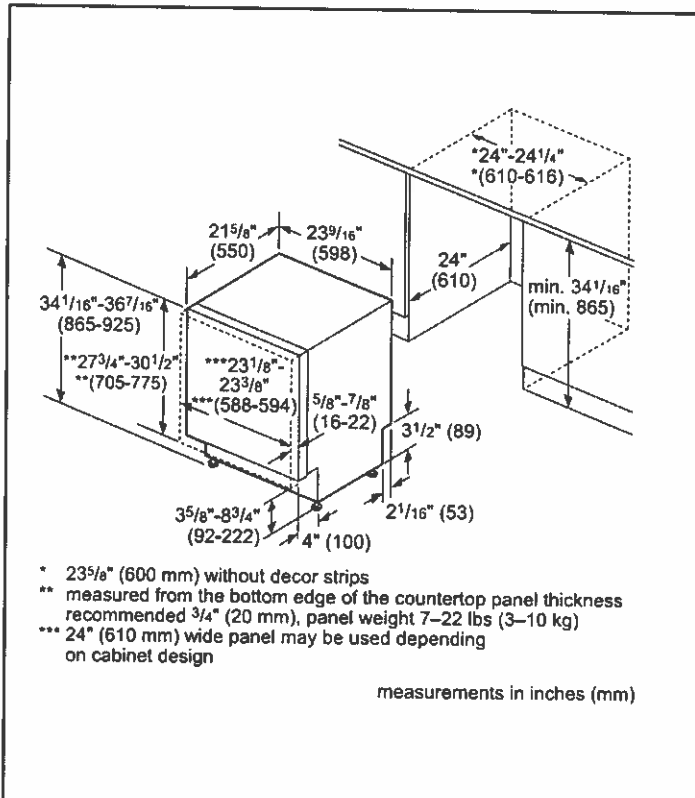

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



Lot 52

24" Custom Panel Dishwasher

Benchmark Series – Custom Panel SHV89PW73N



Installation Details

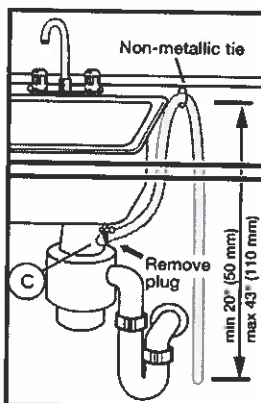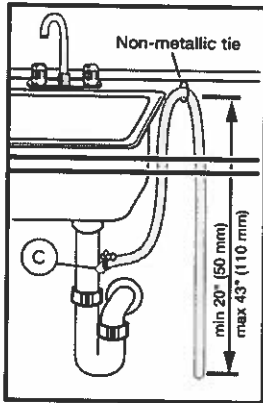

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 88 5/8" (225 cm) and can be extended to a maximum of 165 3/8" (420 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 20" (50 cm) and max. 43" (110 cm) above the cabinet floor.

For help and assistance with Bosch accessories please visit: www.bosch-eshop.com/eshop/bosch/us or call 1-800-944-2904 Mon-Fri 5am to 6pm PST Sat 6am to 3pm PST

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

Warranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

JENN-AIR® DETAILED PLANNING DIMENSIONS


42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)


JF42NFXFDE – 41 3⁄4" x 83 1⁄8" x 24" (without door/handles)

Dec 19, 22

PRODUCT DIMENSIONS

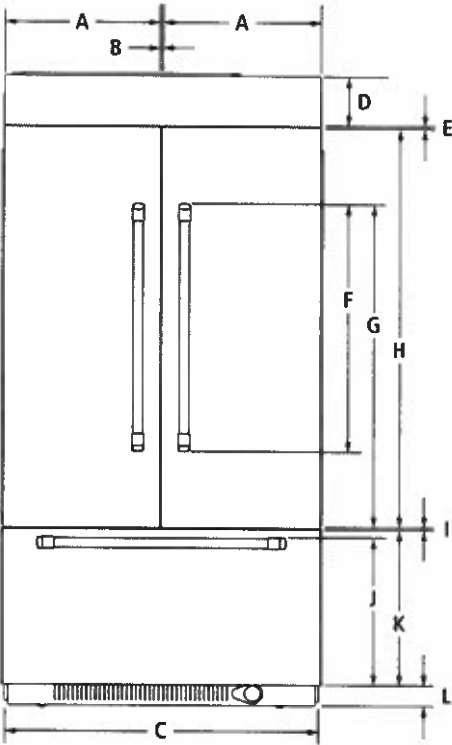

FRONT VIEW

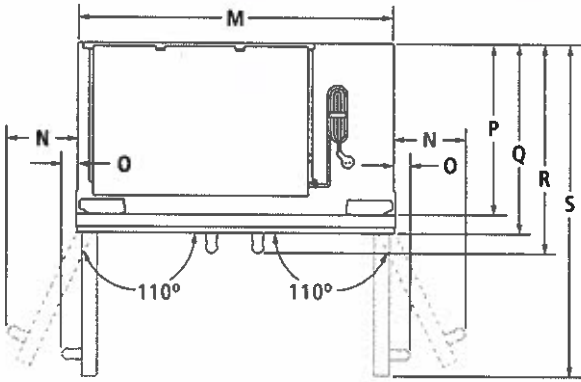

TOP VIEW

MODEL #		JF42NFXFDE	
		in	cm
A	Width of each door	20 3⁄8	52.4
B	Space between doors	1⁄8	0.3
C	Overall width	41 3⁄4	106.0
D	Height of top grille and bracket	6 1⁄2	16.5
E	Space between doors and top grille	3⁄8	0.8
F	Height of door handles		
	Pro-Style® Stainless	32 3⁄8	82.2
	Euro-Style Stainless	37 7⁄8	96.0
G	Height to top of door handles		
	Pro-Style® Stainless	42 3⁄8	107.6
	Euro-Style Stainless	44 7⁄8	114.0
H	Height of doors	52 1⁄2	133.0
I	Space between doors and drawer	1⁄8	0.3
J	Height to top of drawer handle		
	Pro-Style® Stainless	19 3⁄8	49.2
	Euro-Style Stainless	19 1⁄4	48.7
K	Height of drawer	20 1⁄2	52.1
L	Height of bottom grille	3	7.6
M	Width of recessed refrigerator	41	104.1
N	Width from side of refrigerator to handle – door fully open 110°		
	Pro-Style® Stainless	7 7⁄8	20.0
	Euro-Style Stainless	7 1⁄4	18.5
O	Width from side of refrigerator to handle – door open 90°		
	Pro-Style® Stainless	2	5.1
	Euro-Style Stainless	1 1⁄2	3.9
P	Depth without door panel kit	24	61.0
Q	Depth with doors		
	Pro-Style® Stainless panel kit	24 3⁄4	62.9
	Euro-Style Stainless panel kit	24 3⁄4	62.9
	Custom panel (3⁄4"/1.9 cm)	24 3⁄4	62.9
R	Depth with handles		
	Pro-Style® Stainless	27 7⁄8	69.5
	Euro-Style Stainless	26 7⁄8	68.3
S	Depth with doors open 90°	44	111.8


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8111AdZw714

42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JF42NXXFXDE – 41 3/4" x 83 1/8" x 24" (without door/handles)

DIMENSIONS AS INSTALLED

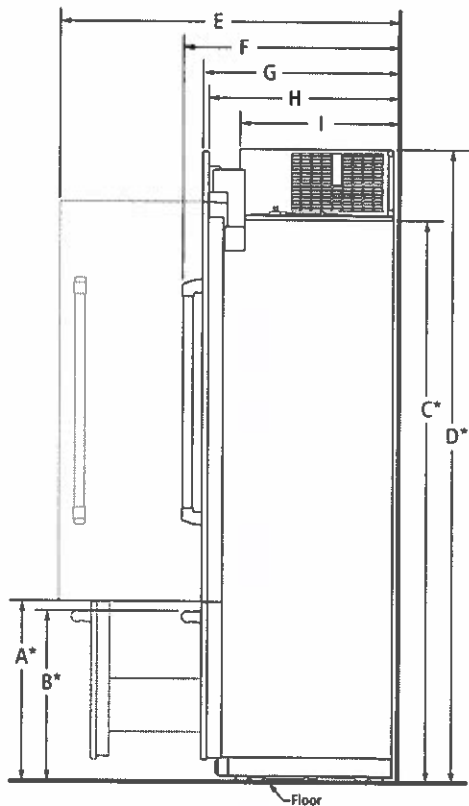

SIDE VIEW

MODEL #		JF42NXXFXDE	
		in	cm
A*	Height to top of drawer (min.)	23 1/2	59.7
	Height to top of drawer handle (min.)		
B*	Pro-Style® Stainless	22 1/4	56.8
	Euro-Style Stainless	22 1/4	56.3
C*	Height to top of doors (min.)	74 1/8	188.9
D*	Height to top of grille and bracket (min.)	83 1/8	211.1
E	Depth with door open 90° (min.)	43 3/4	111.1
	Depth with handles (min.)		
F	Pro-Style® Stainless	27 1/4	69.5
	Euro-Style Stainless	26 1/4	68.3
G	Depth with doors (min.)		
	Pro-Style® Stainless panel kit	24 3/4	62.9
	Euro-Style Stainless panel kit	24 3/4	62.9
	Custom panel (1/4"/1.9 cm)	24 3/4	62.9
H	Depth without door panel kit (min.)	24	61.0
I	Depth of compressor (min.)	19 1/8	50.5

*Add 1 1/4" (3.2 cm) to the height dimension when leveling legs are fully extended.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.




8111AdZw714


42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JF42NXXFXDE – 41 3/4" x 83 1/8" x 24" (without door/handles)

3 STYLES FOR DOOR PANEL INSTALLATION


STANDARD INTEGRATED GRILLE INSTALLATION

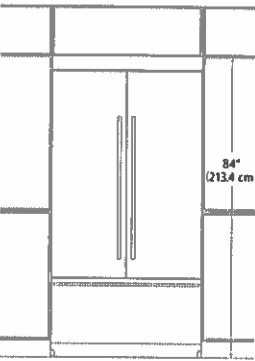

FRONT VIEW

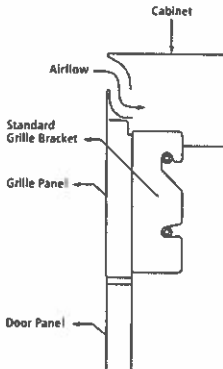


SIDE VIEW – STAINLESS STEEL
PANEL KIT

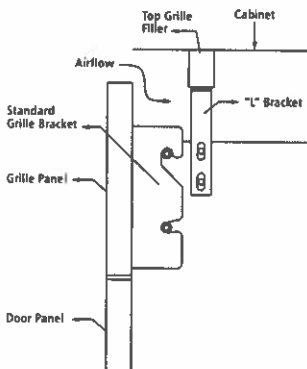


SIDE VIEW – CUSTOM PANEL

- Attach the standard custom grille with the standard grille bracket provided with the refrigerator.
- The standard grille panel height allows for an air gap critical to refrigerator performance.


FULLY INTEGRATED GRILLE INSTALLATION

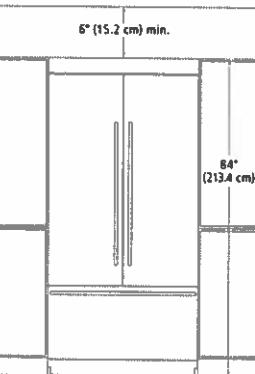

FRONT VIEW – OPEN TO CEILING
(OPTION 1)

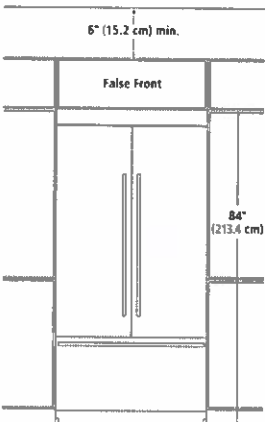


FRONT VIEW – FALSE FRONT
(OPTION 2)

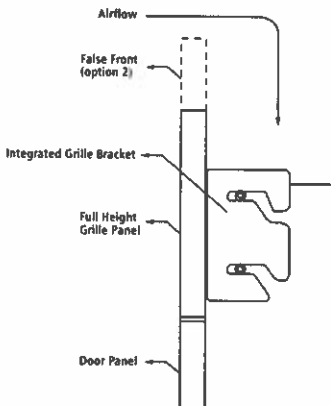


SIDE VIEW – CUSTOM PANEL

- Attach the full-height grille with the integrated grille bracket provided with the refrigerator.
- Requires a minimum of 6" (15.2 cm) of open space above the refrigerator, which must not be blocked in any way, including soffits.


ARMOIRE-STYLE INSTALLATION*

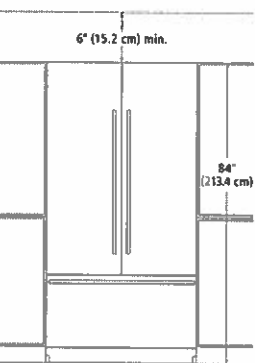

FRONT VIEW – OPEN TO CEILING
(OPTION 1)

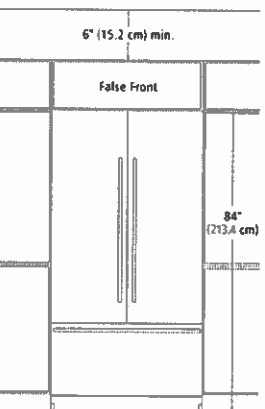

FRONT VIEW – FALSE FRONT
(OPTION 2)

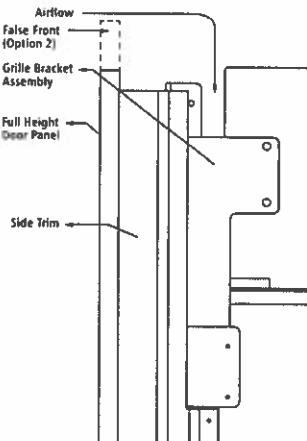



SIDE VIEW – CUSTOM PANEL

- Attach the grille bracket assembly and grille panel provided in the armoire-style panel kit.
- Requires a minimum of 6" (15.2 cm) of open space above the refrigerator, which must not be blocked in any way, including soffits.
- * Refer to the Armoire Kit installation instructions for additional dimensions and installation details.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

42" FULLY INTEGRATED FRENCH DOOR REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JF42NXXFXDE – 41 3/4" x 83 1/8" x 24" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

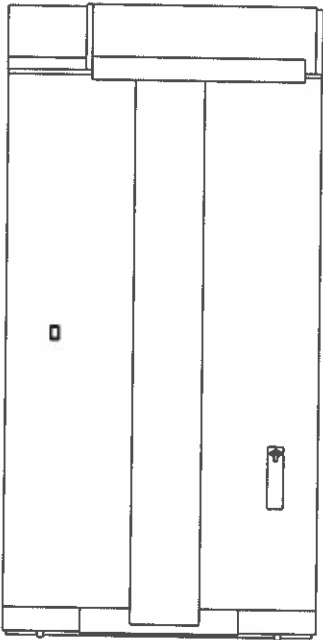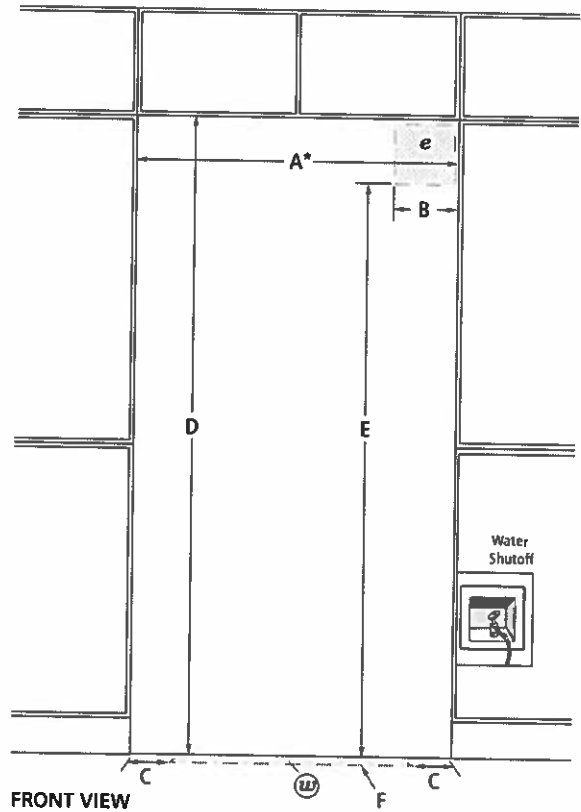

MODEL #		JF42NXXFXDE	
		in	cm
A*	Width (min.)	42	106.7
B	Width of recommended electrical location	7 1/2	19.1
C	Distance from side of cabinet to recommended water connection location	6	15.2
D	Height (min.)	84	213.4
E	Height to recommended electrical location	77	195.6
F	Depth of recommended water connection location (max.)	1	2.5
e	Recommended electrical connection location		
w	Recommended water connection location		

*Minimum width must extend behind the face of the cabinet for at least 2" (5.1 cm).

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



8111AdZw714