


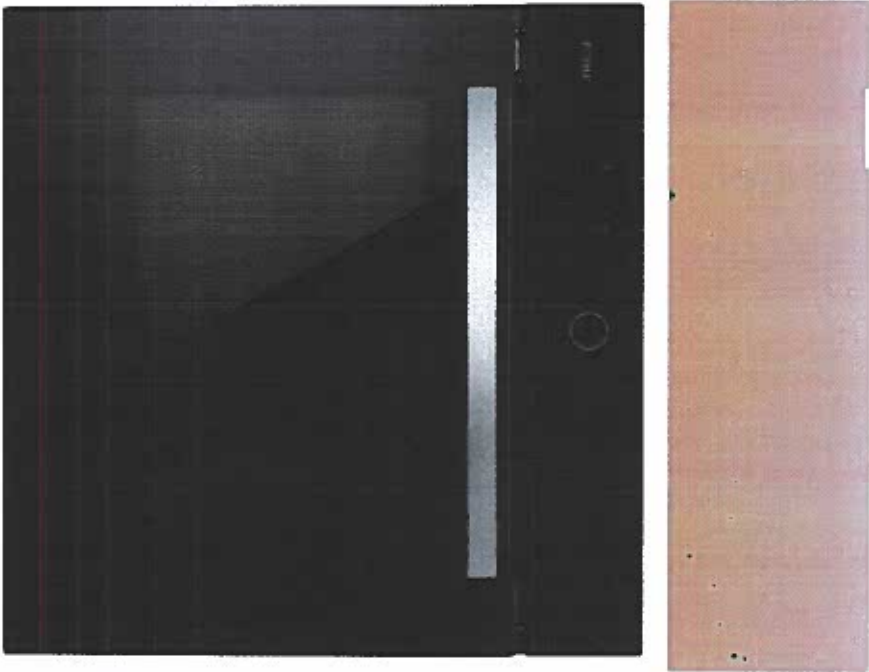

observe every step of the baking process.

Interior temperature field is always constant.  
Bake like a professional chef from your own kitchen.



The A-level energy efficiency allows our oven to  
consume less energy than a traditional one.

Elegant stainless steel design

10 stage cycle baking technology

Specification

|                          |                                   |
|--------------------------|-----------------------------------|
| Rated Capacity:          | 70L                               |
| Rated Voltage:           | 220-240V/60HZ                     |
| Product Size(mm) W*H*D:  | 23 1/2 * 23 1/2 * 21 3/4          |
| Build-in Size(in) W*H*D: | 23 1/2 * 23 1/2 * 23 7/8          |
| Half build-in:           | 22 * ( 23 1/8 - 23 1/4 ) * 22 3/4 |

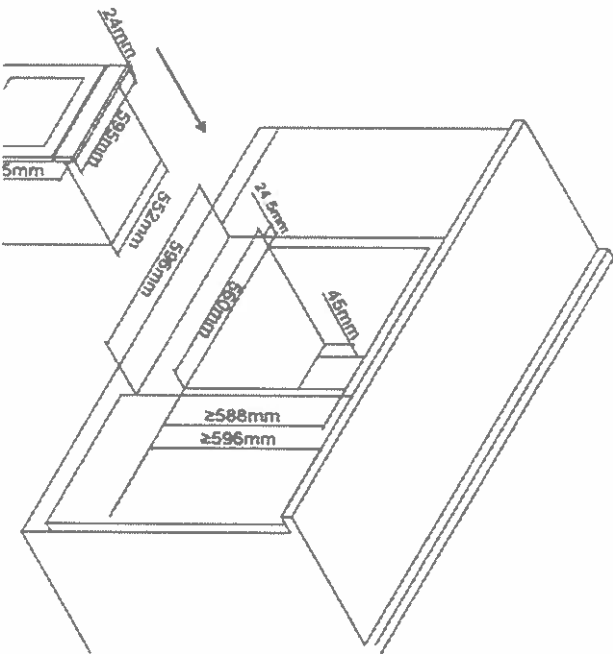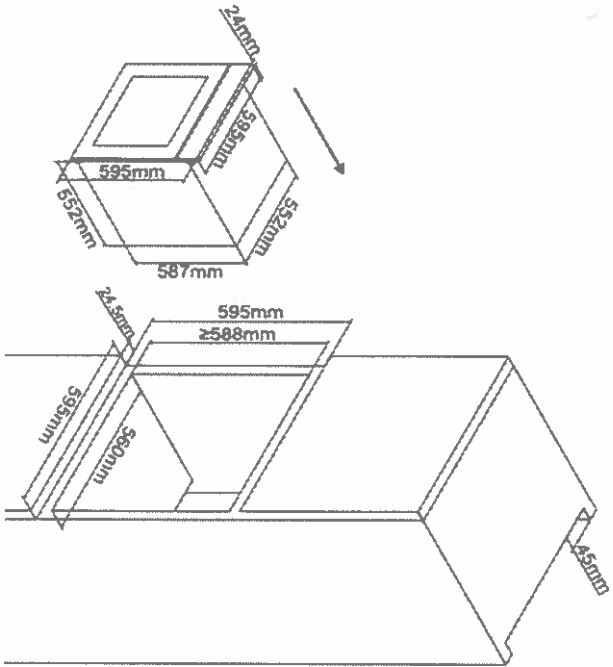

203-6

# Perimeter Series Range Hoods

## EMS9026 Spec Sheet

FOTILE EMS9026 Perimeter Vent Range hood is powerful and has a modern canopy design. Wall mountable, this certified Range Hood offers superior smoke, grease, and odor extraction. With its Patented 2.0 Generation Capture Shield that can be manually adjusted, the range hood actively responds to surrounding smoke for effective ventilation. It is also exceptionally quiet so you can have a casual conversation as you are preparing a meal. Available in Stainless Steel.



### Key Features



Adjusting Capture Shield Technology to accurately absorb, and extract smoke and grease



Auto Turbo Mode for Quick Extra Power



97% Odor Reduction Rate & 92.5% Grease Separation Rate



Covers 7.2 ft<sup>2</sup> of Cooking Area (5-6 Burners)

### Secondary Features

Auto Delay Shutoff  
Extracts Lingering Odors After You Are Done Cooking

Powerful LED Light  
Lights Up Your Cooktop

Large Oil Collection Cup  
Detachable and Easy to Clean

Detachable Capture Shield  
Easy to Clean

Perimeter Series Range Hoods

EMS9026 Spec Sheet

FOTILE

A BREATH OF FRESH ENGINEERING

Oct 203-6


\*Purchaser is getting the 8" vent option

Specifications Table


|                         |                                                                                |
|-------------------------|--------------------------------------------------------------------------------|
| Model                   | EMS9026                                                                        |
| Certification           | ETL                                                                            |
| Width(inch)             | 35 5/16                                                                        |
| Installation            | Wall Mount                                                                     |
| Speed Setting           | 2+ Turbo                                                                       |
| Max. EQUIV.CFM          | 1000*                                                                          |
| Max Static Pressure(Pa) | 500                                                                            |
| Power Supply(V/Hz)      | 120/60                                                                         |
| Noise Level(dB)         | 43.79 / 49.83 / 56.06                                                          |
| Illumination(W)         | 2W (LED)                                                                       |
| Motor                   | AC Motor                                                                       |
| Operation Type          | Touch                                                                          |
| Delay Shutoff           | 2min                                                                           |
| Capture Shield          | Manually-Adjustable                                                            |
| Screen Lock             | N                                                                              |
| Grease Filtration Rate  | 92.5%                                                                          |
| Odor Reduction Rate     | 97%                                                                            |
| Warranty                | Labor: 2 Years<br>Parts: 5 Years(Limited)<br>Motors: Lifetime Limited Warranty |

\*FOTILE Equivalent CFM is a higher CFM rating due to our filterless technology that combines Whisper Motors and Capture-Shield design. By utilizing this technology, FOTILE applies the Coanda Effect by accelerating smoke extraction and grease separation, and increasing our Capture Efficiency. This enables FOTILE to cover a larger cooktop surface (7.2 Sq Ft) and achieve a 92.5% oil filtration rate, and 97% odor reduction rate, keeping your kitchen smoke free and smelling fresh.

Installation Dimensions

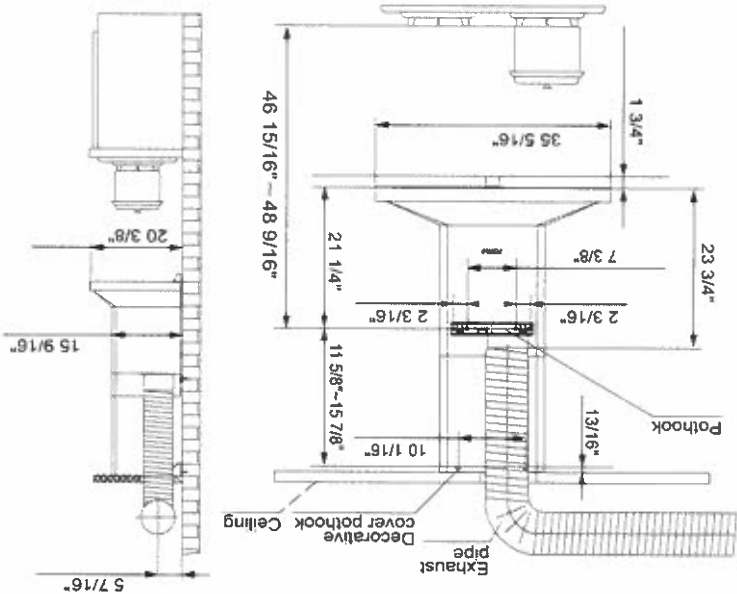

Installation Examples

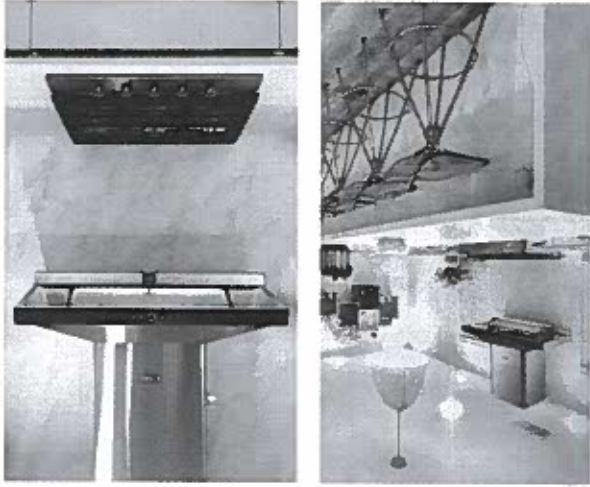

Lot 203-6

**FOTILE**


A BREATH OF FRESH ENGINEERING®

30" & 36" BUILT-IN GAS COOKTOPS


**Tri-Ring Series** for Efficient and Versatile Cooking

Models: GLS30501, GLS36502


A mighty flame emerges from a tiny spark, a spark of inspiration, a spark of creativity, a spark of passion for the longing of embarking on a journey to taste every corner of the world. FOTILE's Tri-Ring Gas Cooktop provides easy, fast ignition, versatile functions, and precise controls to make cooking enjoyable and convenient. Whether you're cooking for one or a crowd, our 5-burner gas cooktop with a Tri-Ring Burner has the features you need to make everything from a simple breakfast to a multi-course feast.

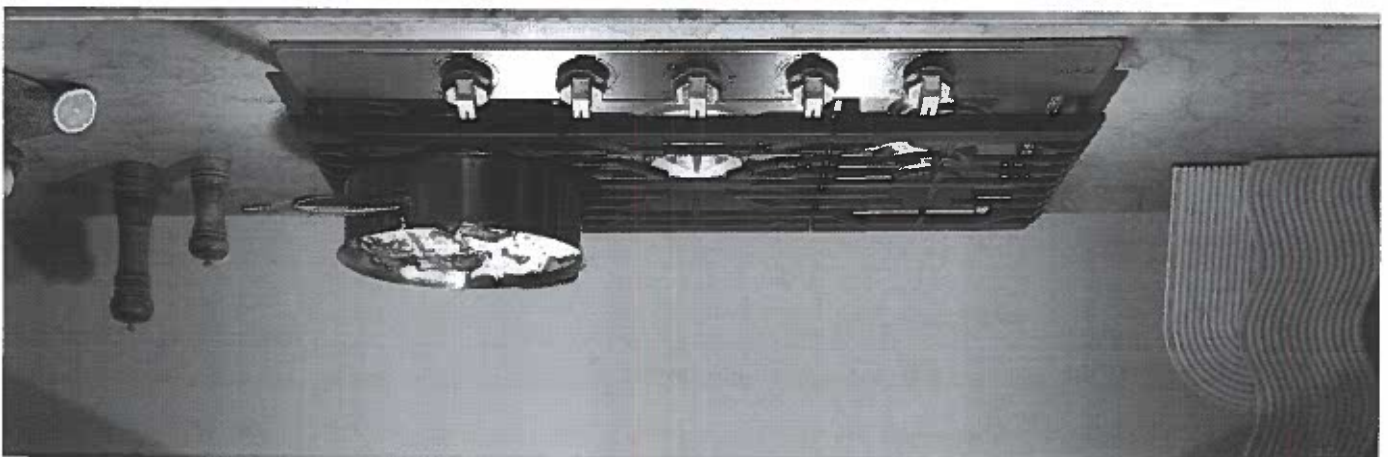

## Features & Benefits

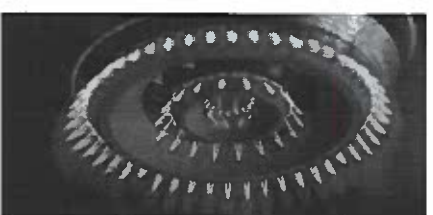

- Versatile Center Burner**
- Up to 22,000 BTU for faster boiling or stir fry
  - Control temperature precisely and heat up evenly

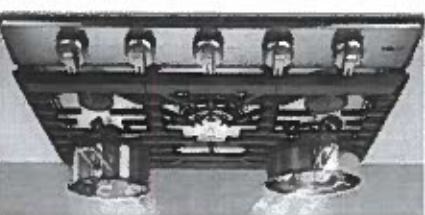

- Edge to Edge Cooking Grates**
- Accommodates pots and pans of all sizes
  - Allow for seamless transition of heavy pots and pans across burners




- Flame Failure Detection**
- Cuts off the gas supply automatically if the flame is out during cooking, keeping your home and family safe



- Easy to Clean**
- Sealed burners to prevent liquids from spilling into the burner box
  - Removable burner caps, cast iron cooking grate and burner knobs



- High Heating Efficiency**
- Burners designed by FOTILE R&D team are not only with powerful heating load, but also high efficient to save your cooking time

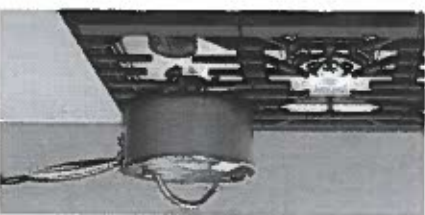

- Simmer Burner with 500-3,000 BTU Range**
- Remains low, accurate, and consistent heat to help you flawlessly execute delicate dishes like melting coconut oil, warming chocolate or thickening jam

Actual color may vary. Design, specifications and color availability are subject to change without notice. Non-metric weights and measurements are approximate. FOTILE CANADA  
FOTILE Toronto Flagship Store  
Address: 8365 Woodbine Ave., Markham, L3R2P4 Tel: 844-315-0315 Web: ca.fotileglobal.com Service Mail: info@fotileca.com


203-6

FOTILE

A BREATH OF FRESH ENGINEERING

Tri-Ring Series for Efficient and Versatile Cooking

Models: GLS30501, GLS36502



| MODEL                                  | GLS30501                                                                                                   | GLS36502                                                                                                   |
|----------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Dimensions & Weight                    |                                                                                                            |                                                                                                            |
| Product Dimensions(WxDxH)(inch)        | 30 x 21 x 5 1/4                                                                                            | 36 x 21 x 6                                                                                                |
| Cut-out Dimensions(WxD)(inch)          | Min.28 1/2-Max.29 x Min.19 5/8-Max.20 1/8                                                                  | Min.33 7/8-Max.35 x Min.19 1/8-Max.20 1/2                                                                  |
| Countertop to grate surface(inch)      | 2 3/4                                                                                                      | 2 3/4                                                                                                      |
| Insert Chassis Height(inch)            | 2 1/2<br>(With Manifold Pipe 3 3/8)                                                                        | 3 1/4<br>(With Manifold Pipe 4 1/8)                                                                        |
| Net Weight(lb)                         | 48                                                                                                         | 59.5                                                                                                       |
| Gross Weight(lb)                       | 57.5                                                                                                       | 70.5                                                                                                       |
| Packing-Box Dimensions (WxDxH)(inch)   | 34 5/16 x 25 1/4 x 9 11/16                                                                                 | 40 x 25 3/16 x 11 13/16                                                                                    |
| Appearance Material                    |                                                                                                            |                                                                                                            |
| Panel                                  | Stainless Steel                                                                                            | Stainless Steel                                                                                            |
| Pan Grates                             | Heavy Duty Cast Iron                                                                                       | Heavy Duty Cast Iron                                                                                       |
| Burners                                | Brass, Aluminium                                                                                           | Brass, Aluminium                                                                                           |
| Knobs                                  | Kirsite, Nylon                                                                                             | Kirsite, Nylon                                                                                             |
| Technical Specifications               |                                                                                                            |                                                                                                            |
| Fuel Type                              | Natural Gas(Factory Set)                                                                                   | Natural Gas(Factory Set)                                                                                   |
| No. of Burner                          | 5                                                                                                          | 5                                                                                                          |
| Heating Load(BTU)                      | Center: 22K(Tri-Ring Power Boil)<br>Left Front/Left Rear: 13K<br>Right Rear: 3K(Simmer)<br>Right Front: 6K | Center: 22K(Tri-Ring Power Boil)<br>Left Front/Right Front: 13K<br>Right Rear: 3K(Simmer)<br>Left Rear: 6K |
| Total Output (BTU)                     | 57K                                                                                                        | 57K                                                                                                        |
| Electrical Supply                      | 120V, 60Hz, 15A                                                                                            | 120V, 60Hz, 15A                                                                                            |
| Power Cord                             | Included                                                                                                   | Included                                                                                                   |
| Features and Functions                 |                                                                                                            |                                                                                                            |
| Full-Width Grates                      | Continuous                                                                                                 | Continuous                                                                                                 |
| Burner Type                            | Sealed                                                                                                     | Sealed                                                                                                     |
| Control Feature                        | Child Lock                                                                                                 | Child Lock                                                                                                 |
| Safety Device                          | Flame Failure Detection                                                                                    | Flame Failure Detection                                                                                    |
| Tri-Ring Wok Burner                    | ✓                                                                                                          | ✓                                                                                                          |
| Fast Ignition                          | ✓                                                                                                          | ✓                                                                                                          |
| Wall Oven Compatible                   | ✓                                                                                                          | ✓                                                                                                          |
| Accessories Included                   | Wok Grate<br>LP Conversion Kit                                                                             | Wok Grate<br>LP Conversion Kit                                                                             |
| Optional Accessory for Purchase        | Cast Iron Gridle                                                                                           | /                                                                                                          |
| Warranty: 3 YEARS PARTS, 1 YEARS LABOR |                                                                                                            |                                                                                                            |

Oct 203 &



Tri-Ring Series for Efficient and Versatile Cooking

Models: GLS30501, GLS36502


30" & 36" BUILT-IN GAS COOKTOPS

Installation Details


Installation Information:

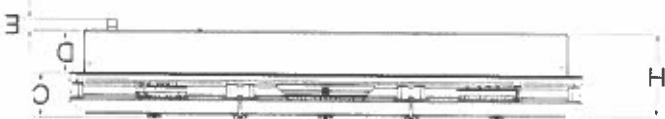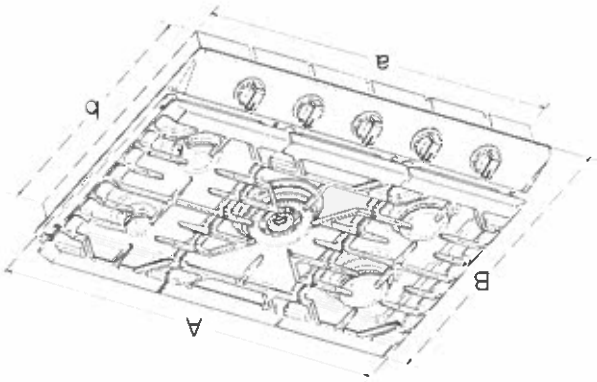

| (inches) | Product Dimensions |               |                |                        | Cut-out Dimensions         |                          |                |               |
|----------|--------------------|---------------|----------------|------------------------|----------------------------|--------------------------|----------------|---------------|
|          | A                  | B             | H              |                        | a                          | b                        |                |               |
|          | Product Width      | Product Depth | Product Height | Cut-out Width          | Cut-out Depth              | Product Above Countertop | Chassis Height | Manifold Pipe |
| GLS30501 | 30                 | 21            | 5 1/4          | Min. 28 1/2<br>Max. 29 | Min. 19 5/8<br>Max. 20 1/8 | 2 3/4                    | 2 1/2          | 15/16         |
| GLS36502 | 36                 | 21            | 6              | Min. 33 7/8<br>Max. 35 | Min. 19 1/8<br>Max. 20 1/2 | 2 3/4                    | 3 1/4          | 15/16         |

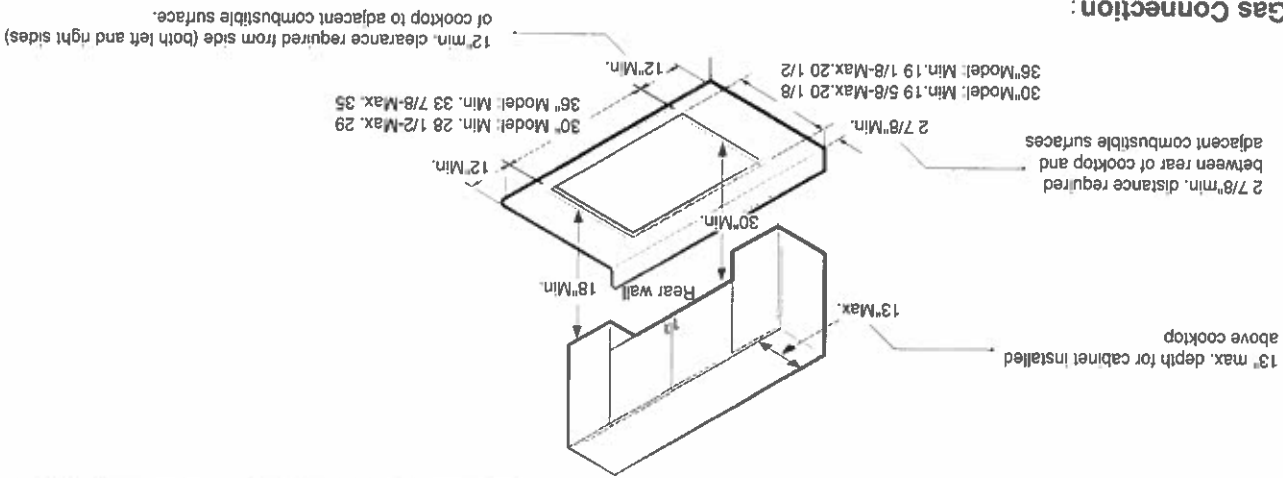

Gas Connection :

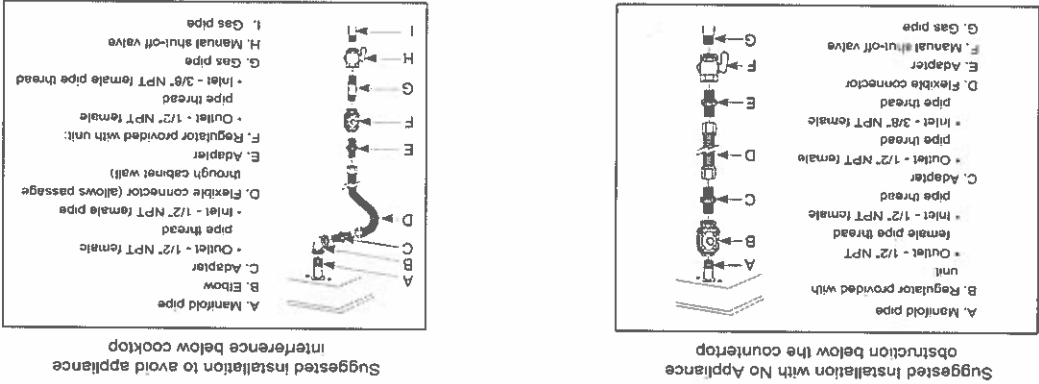

\* FOTILE gas cooktops are manufactured and shipped to be used with natural gas. If you want to use LPG, please convert the cooktop to LPG following the instructions in the Installation Manual.

Actual color may vary. Design, specifications and color availability are subject to change without notice. Non-metric weights and measurements are approximate. FOTILE CANADA  
FOTILE Toronto Flagship Store  
Address: 8365 Woodbine Ave., Markham, L3R2P4 Tel: 844-315-0315 Web: ca.fotileglobal.com Service Mail: info@fotileca.com