

STANDARD APPLIANCE WIDTHS

The purchaser acknowledges the following standard spaces for kitchen appliances:

- ☒ Range Conventional – 30" Width
- ☒ Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)
- ☒ Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)
- ☒ Dishwasher – 24" Width
- ☒ 6" Exhaust Vent above stove
- ☐ OTHER _____

***Check all that apply - NON-STANDARD APPLIANCE OPTIONS**

NOTE: When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

****MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED****

- | | |
|--|--|
| ☐ 36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code) | ☐ Built-In Microwave with Trim Kit |
| ☐ Gas Stove | ☐ Built-In Microwave Drawer with Trim Kit |
| ☐ Slide-In Stove | ☐ OTR – Over The Range Microwave *Plug required |
| ☐ Cooktop
*(Gas/Electric – Cut-out Charge & Plug Required) | ☐ Built-In Refrigerator/Sub Zero – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24"
*Applicable charges may apply if required to due to space accommodations
*Note: Refrigerator Door Swing |
| ☐ Built-In Wall Oven | ☐ Wine / Bar Fridge (electrical required) |
| ☐ Hood Fan (may require larger vent, charges will apply – 6" is standard) | ☐ Steam Oven / Built-In Coffee makers |
| ☐ 8" Vent / 10" Vent | ☐ Cargo Waste Bin systems |
| ☐ Chimney hoods (clearance space will be left with this appliance will not butt up against cabinetry) | ☐ Front Load Washer & Dryer *(Specs required if installing counter above) |
| | ☐ Stackable Washer & Dryer |

JD **NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

JD Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

JD If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied. To be determined at Zancors discretion.

Appliance Specifications are to be sent to the Zancor Décor Centre no later than

FRIGIDAIRE
APR 2013

Purchaser Signature [Signature]

Date Sept 9/13

Purchaser Signature [Signature]

Date Sept 9/13

PROJECT Royal


LOT 109-1

FRIGIDAIRE


GALLERY.

French Door Refrigerator


FGHG2344M F

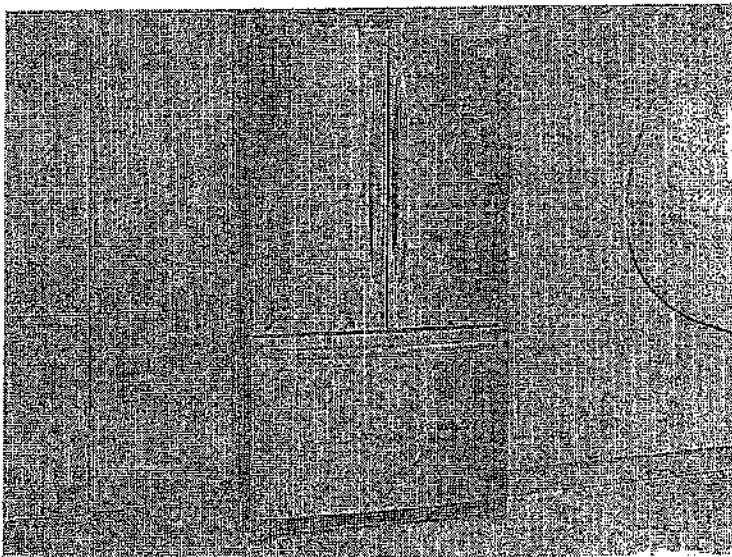


Signature Features




Fits-More™ Capacity
Our Fits-More™ French Door Refrigerator offers more usable space inside, same space on the outside, so you can easily find a place for everything.



SpaceWise® Organization System
Makes it easy to keep food organized and easy to find when you need it with a Store-More™ full-width drawer, gallon-size door bins, and Effortless™ Glide freezer drawers.



Best-in-Class Filtration¹
PureSource Ultra® Filtration is best-in-class so you get cleaner, better-tasting ice at your fingertips.



Quick Ice²
Quick Ice delivers up to 37 percent more ice.

23 Cu. Ft. Counter-Depth

Product Dimensions

Height (incl. door) 69 7/8"
Width (door open) 35 1/2"
Depth (incl. door) 25 1/2"

More Easy-to-Use Features

Store-More™ Full-Width Drawer
Large capacity vegetable drawer provides more space to easily store anything from meat to produce, plus flatware racks and food boxes.

Effortless™ Glide Crisper Drawers
Keep your fruits and vegetables fresh in our crisper drawers which easily glide out and are designed to effortlessly close.

Effortless™ Glide Freezer Drawers
Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

Store-More™ Bins
Our gallon-size bins are designed to store more so you can keep a gallon of milk.

SpillSafe™ Glass Shelves
SpillSafe glass shelves slide out for easy access and are designed to keep spills contained making cleanup a breeze.

PureAir™ Ultra Filters
Our PureAir Ultra filters effortlessly keep the air in your refrigerator fresh.

Energy Saver Plus Technology

Express-Select Controls
Easy select options with the touch of a button.

Automatic Alerts
Refrigerator alerts you if the door isn't closed or if temperature rises.

ENERGY STAR®

As part of the ENERGY STAR program, this refrigerator is certified to meet strict energy efficiency guidelines.

Available in






Spain

For more information, visit frigidaire.com or call 1-800-391-2774.

©2014 Frigidaire

[illegible]

FGHG2344M F 23 Cu. Ft. Counter-Depth

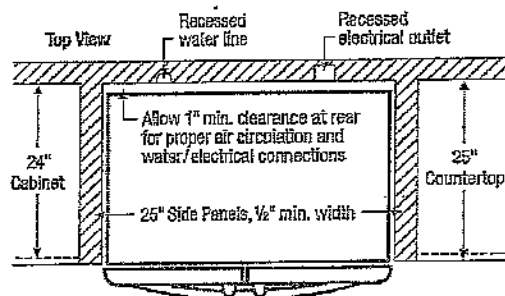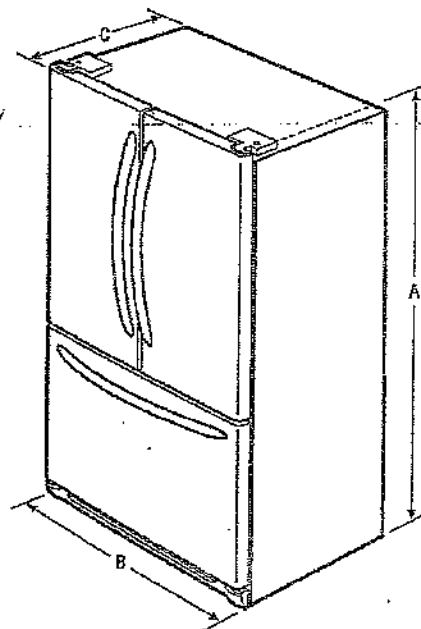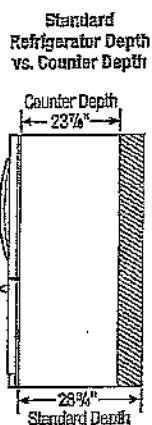

NOTE: For planning purposes only. Always consult local and national electrical and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at fridgeaire.com.



Product Dimensions	
Length (inches)	69.7
Channel Width (inches)	15.75
Centerline Spacing (inches)	16.5
Section Depth (inches)	30
Depth to Flange (inches)	27.5
Extended Bottom Flange	

"Built-In-Look" Circuit Dimensions	
Radius (inches) - 20 Kales	10 1/4"
Width	16 1/2"
Depth	15 1/2"

For use on adequately wired 120V, dedicated circuit having Z-Wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available
on the web at frigidaire.com

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGH62344M 03/12 © 2012 ElectroLux

FG:G2344M 03/12

© 2012 Electrolux Home Products, Inc.


Specifications
subject to change

FRIGIDAIRE

GALLERY

French Door Refrigerator

FGHG2344M F 23 Cu. Ft. Counter-Depth

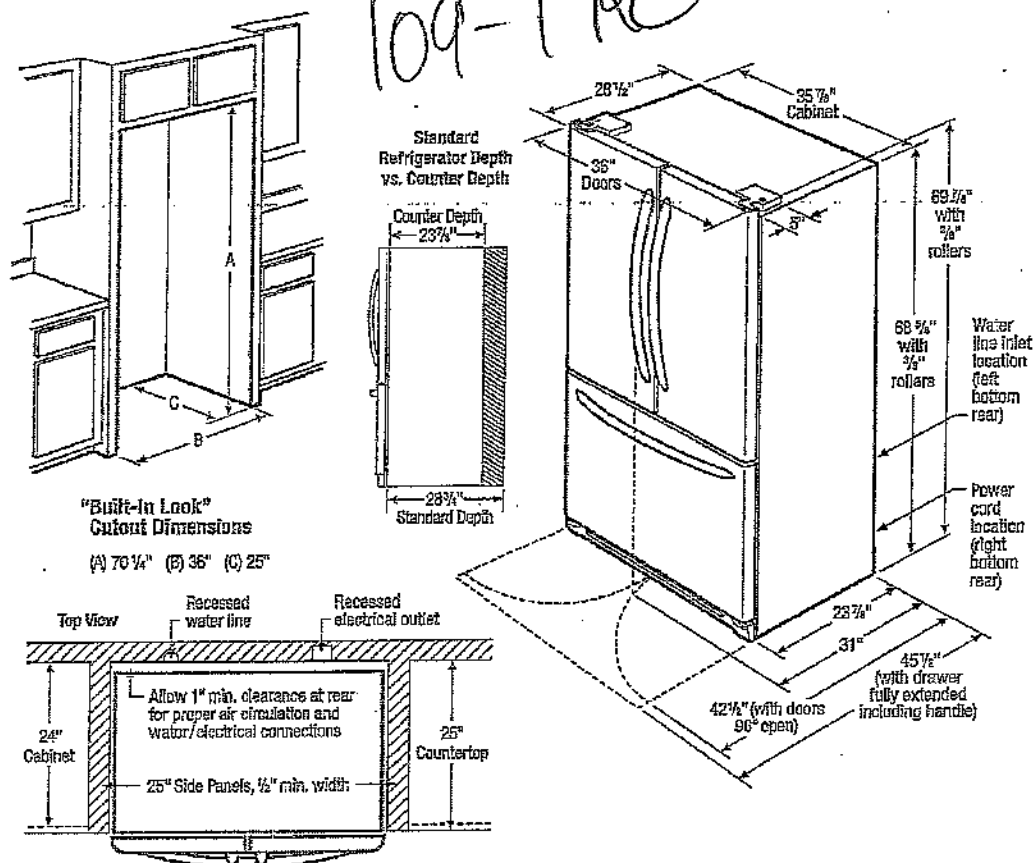

French Door Refrigerator Specifications

- Product Shipping Weight (approx.) - 345 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NEPA 70) and local codes & ordinances.
- Voltage Rating - 120V/60 Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (At side doors 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille must remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure - Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

FRIGIDAIRE

USA • 10300 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGHG2344M 08/12

© 2012 Electrolux Home Products, Inc.




Specifications subject to change.

FRIGIDAIRE


GALLERY

Freestanding Range


CGEF3057KF

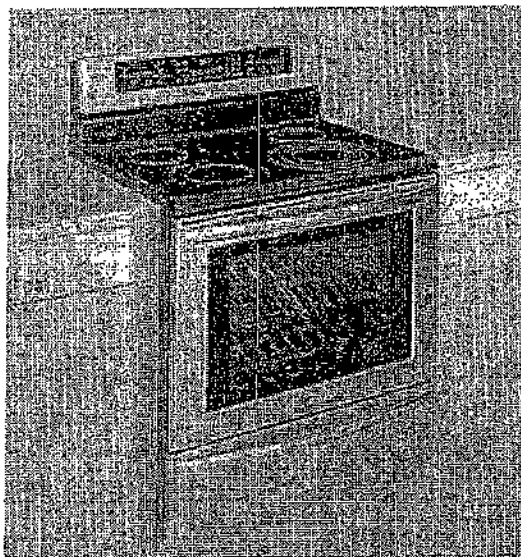


Signature Features




Fits-More™ Oven
A unique rack configuration creates more cooking space.



Quick Preheat
Preheat in less than six minutes!



True Convection
With True Convection, you can easily and evenly bake 200 chicken nuggets in 10 minutes.*



Quick Boil
Boil water faster with our 3,000-watt element.

30" Electric

Effortless Performance

Auto Shut-Off
PowerBlast 3,000W
Quick-Clean Oven
Effortless™ Convection Conversion

Performance-Driven Style

Stainless Steel Controls
Effortless™ Oven Rack
Real Stainless Steel
Even Baking Technology
Smoothtop Ceramic Glass Cooking Surface

SpaceWise™ Design

SpaceWise™ 1st Rack
Keep Warm Zone 100°
SpaceWise™ Expandable Element
6,000W / 2,000W / 3,000W
SpaceWise™ Expandable Element
6,000W / 2,000W / 2,000W / 2,000W
It's More. Got It?

One-Touch Options

Click & Nudge
P77
Keep Warm
Add a Minute
One-Touch Self-Clean

More Easy-to-Use Features

Keep Warm Drawer With
SpaceWise™ 1st Rack
Delay Start
Hidden Bake Element
Wide View Window

Sabbath Mode (Star-K® Approved)

Capacities

5.0 cu. ft. oven capacity

Overall Exterior Dimensions

Height 37 1/2"
Width 29 7/8"
Depth 28 1/4"

Available in:

Stainless Steel

For more information, visit us online at

frigidaire.com


frigidaire.ca

FRIGIDAIRE

GALLERY

Freestanding Range

CGEF3057KF 30" Electric

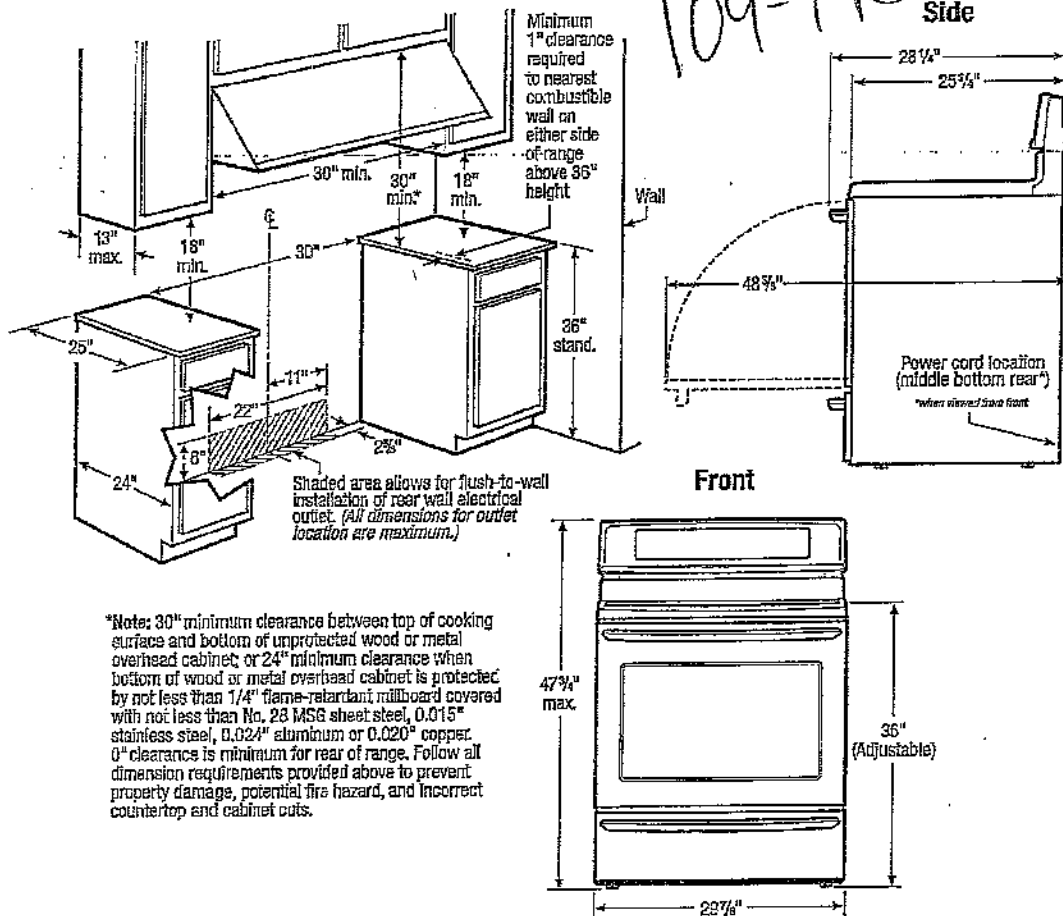

Freestanding Range Specifications

- Product Shipping Weight (approx.) - 210 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides of line with ground.
- Connected Load (kW Rating) @ 240/208 Volts = 13.5/10.0 kW
- Recommended Circuit Breaker - 40 Amps
- Always consult local and national electric codes.
- Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- Minimum 1" clearance required from edge of rangetop to nearest combustible wall on either side of range above 36" height.

- Allow 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

FRIGIDAIRE®

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

CGEF3057K 01/11

© 2011 Electrolux Major Appliances




Specifications subject to change.

FRIGIDAIRE


GALLERY.

Dishwashers


FGHD2455L F/W/B

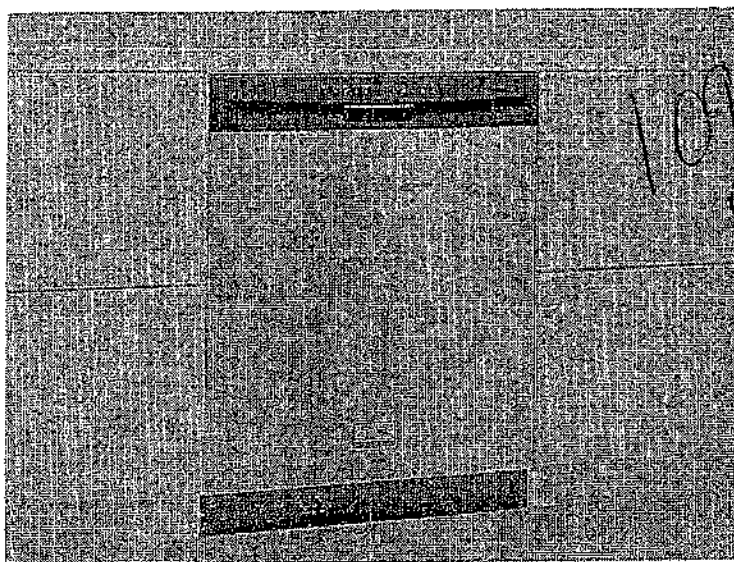

Signature Features




Quietest Dishwasher in Its Class¹
A quiet performance every time.



SpaceWise™ Organization System
Our SpaceWise™ Organization system features adjustable racks and the Largest Silverware Basket² so there's a place for virtually anything.



Largest Silverware Basket²
There's room for over 190 items in our multicompartiment silverware basket.



Stainless Steel Interior
Premium stainless steel interior for maximum durability.

24" Built-In

Product Dimensions

Height (Adjustable) 33 1/2" - 34 1/2"
Width 23 1/4"
Depth (Including Door) 24 1/2"

More Easy-To-Use Features

Real Stainless Steel³

Real stainless steel with a protective coating that resists fingerprints and smudges. Go from easy to clean.

DishSense™ Technology

Sensors select the cycle for you based on your cleaning needs.

Energy Saver Plus Cycle

FlexiWash™ Cycle uses less energy without compromising cleaning performance.

Express Select™ Controls

Easy select options with the touch of a button.

Multiple Cycle Options

Features easy-to-use clean-to-cycle options including Rinse Only and Heavy Wash.

Adjustable Upper Dish Rack

Flexible 2-Tip System lets you adjust the top rack for tall items.

Most Adaptable Delay Start

16 1/2-hour options.

Stay-Ret Door

The door stays out as long as you want and it won't open.

Low-Rinse-Are Indicator

ENERGY STAR

CEE International Certification



Available in



Stainless Steel White Black

Based on 24" built-in dishwasher specifications.
Always use proper loading techniques.
See model specifications for details.


frigidaire.com

CALL CENTER

EGHD24551 E/W/B- 24" Built-in

[illegible]

109-1
PC

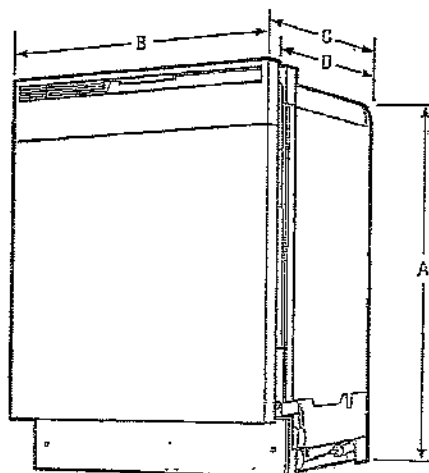

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at trigdale.com

ඇමුණුක
අංක 100

Product Dimensions	
Length (mm)	54
Breadth (mm)	23.7
Height (mm)	23.9
Depth (mm)	50

Cutout Dimensions	
Height (mm)	100
Height (in)	3.94
Width (mm)	100
Width (in)	3.94
Depth (mm)	100

¹ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available
on the web at frigidaire.com

FRIGIDAIRE

USA - 10200 David Taylor Drive - Charlotte, NC 28262 - 1-800-FRIGIDAIRE - frigidaire.com
CANADA - 5855 Terry Fox Way - Mississauga, ON L5V 3E4 - 1-800-265-8352 - frigidaire.ca

FGHD2455L 09/10 © 2010 Electroflux Inc.

FGHD245SL 09/10


© 2010 Electrolux Home Products, Inc.

Specifications
subject to change
Printed in the U.S.A.

Printed in the U.S.A.

FRIGIDAIRE


affinity.

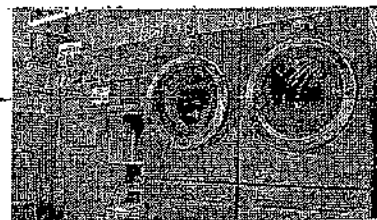

Front Load Washers

FAFW3801LW

5 Wash Cycles
3.8 Cu. Ft.

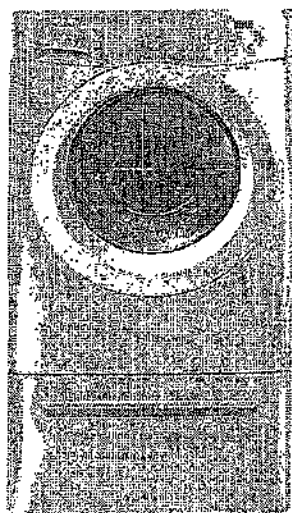

109-1
RC



Optional SpaceWise® Pedestal Drawer Shown

Product Dimensions

Depth	36"
Width	27"
Height	33.5" (to top of door)

More Easy To Use Features

Silent Design™
For quiet operation.

Stay-Fresh Antimicrobial Seal

**Optional SpaceWise®
Pedestal Drawer**

ENERGY STAR


Available in




Signature Features




Vibration Control System
Advanced vibration control technology keeps even oversized loads balanced for smooth, quiet operation. Ideal for second floor installation.



TimeWise™
Wash time equals dry time — so you don't wait for clothes to dry.



Fresh Water Rinse
Our Advanced Rinse Technology reduces the amount of detergents and additives that may cause allergies.




Express-Select® Controls
Easily select options with the touch of a button.



affinity.

FAFV38M199 3.8 CC FE

15 or use an adequately wired 120V, dedicated circuit having 2" wire service with a separate ground wire. Appliances must be grounded for safe operation.



Product Dimensions		
Height (inches)	45 1/2	56 1/2
Depth (inches)	21 1/2	21 1/2
Weight	100 lbs	100 lbs
Capacity	100 lbs	100 lbs
Depth (inches)	21 1/2	21 1/2
Pedestal Dimensions		
Height (inches)	15 1/2	15 1/2
Weight	27 lbs	27 lbs
Capacity	27 lbs	27 lbs

Accessories information available
on the web at frigidaire.ca

FRIGIDAIRE
CANADA • 5955 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-255-8352 • frigidaire.ca
FAFW380HL 06/12 © 2012 Electrolux

Specifications subject to change.

© 2012 Electrolux Major Appliances, NA


Printed in Canada

FRIGIDAIRE


affinity.

Front Load Washers

FAFW3801LW 3.8 Cu. Ft.

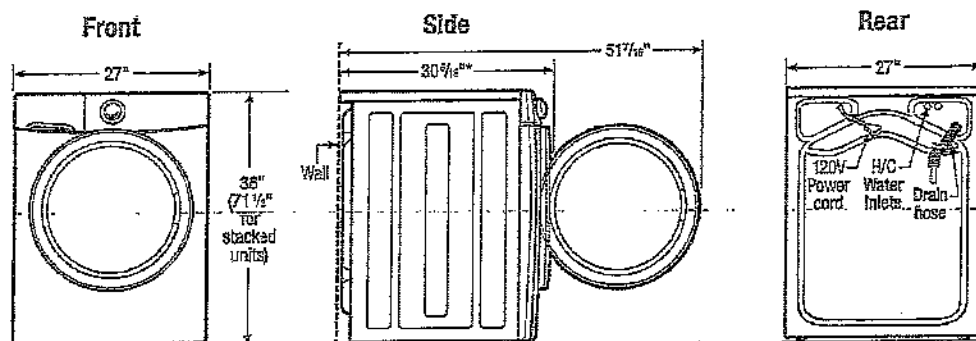

109-1
Re




15" Drawer Pedestal Installation

Elevates washer height to 51 1/4". For detailed pedestal installation, refer to instructions included with pedestal or on web. Note: Pedestal installation requires modified utility hookup locations. For details, refer to Product Installation Guide on web.


Built-In Installations

For built-in installations, NO minimum clearance required around sides or backs of units. For closet installation, allow additional 1" clearance between fronts of units and door. Location of plumbing, exhaust and utility hookups MUST be considered in built-in installations. For additional installation details, refer to Product Installation Guides on web.

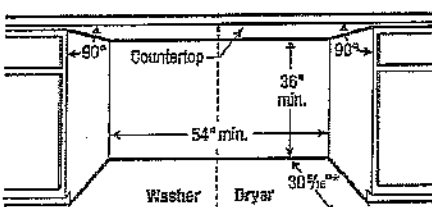

Side-by-Side Units in Under-Counter Installation
Can be installed with standard countertop and/or cabinetry.

*To achieve minimal installation depth dimensions, dryer MUST be vented straight back. For installation with quick-turn 90° elbow, refer to Product Installation Guide on web for approximate clearances incurred with multi-directional exhausting options in freestanding, pedestal-mounted, or stacked installation.



Stacked Units in Recessed or Closet Installation

For detailed stacked installation, refer to instructions included with Stacking Kit or on web. Note: Stacked installation requires modified utility hookup locations for dryer. For details, refer to Product Installation Guide on web.

Front Load Washer Specifications

- Product Shipping Weight (approx.) - 222 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (ANSI/NFPA 70) and local codes & ordinances. (Do not use same circuit as dryer.)
- Voltage Rating - 120V/60 Hz/15 Amps
- Amps @ 120 Volts = 8 Amps
- Equipped with 120V 3-wire power supply cord, approx. 60" long.
- Always consult local and national electric & plumbing codes.
- To maximize detergent effectiveness, ambient temperature should never be below 60° F.
- Can be installed alone, with or without optional 15" Drawer Pedestal, or stacked below matching Frigidaire® Affinity Dryer, which requires installation of optional Dryer Stacking Kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)
- Can be built in with matching Frigidaire® Affinity Dryer in under-counter, recessed or closet installation. (Refer to Built-In Installations on this page for cutout dimensions. For additional installation details, refer to Product Installation Guide on web.)
- Closet installation requires vented door with 2 unobstructed louvered openings, minimum 60 sq. in. each, located 3" from top and bottom of door. Full-length 120 sq. in. opening also acceptable. Allow additional 1" clearance between fronts of units and closed door.
- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.

- Floor MUST be solid with 1" maximum slope. To minimize vibration or movement, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Leveling legs supplied to level washer properly and reduce excessive noise and vibration.
- H/C water faucets MUST be installed within 42" of washer's water inlet and MUST be 3/4" to connect to 43" inlet hoses.
- Water pressure MUST be between 30 and 120 psi with NOT more than 10 psi pressure difference between hot and cold.
- Drain required with standpipe diameter of 1-1/4" min. and height of 24" min./96" max. above floor, capable of eliminating 17 gallons per minute. Attached 52" drain hose can reach 74"-high standpipe. For higher standpipe, optional Drain Hose Extension Kit available.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.ca for detailed instructions.

Optional Accessories

- Dryer Stacking Kit - (PN# STACKT4X).
- 15" Classic White Drawer Pedestal - (PN# CFPWD15W).
- Mobile Home Installation Kit - (PN# 137067200).
- Drain Hose Extension Kit - (PN# 137098000).



FRIGIDAIRE

CANADA • 5655 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FAFW3801L 08/12

© 2012 Electrolux Major Appliances, NA

Specifications subject to change.

Printed in Canada

FRIGIDAIRE
frigidaire.ca



Frigidaire Affinity 7.0 Cu. Ft. Electric Dryer

Model: CAQE7011LW
27" W x 36" H x 30-3/10" D



Classic White

109-1
RC

Shown with Optional Pedestal.