

FRIGIDAIRE


GALLERY



French Door Refrigerators

FGHG2344M F/P/E

23 Cu. Ft. Counter-Depth

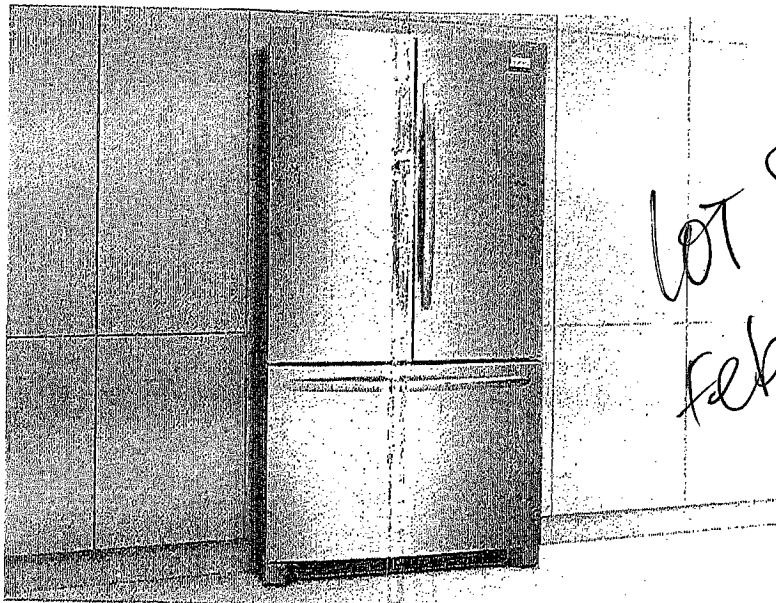

lot 86 RC
Feb 19/14

Product Dimensions

Height (Including Hinges & Rollers)	69-3/8"
Width (Doors)	36"
Depth (Including Door)	28-1/4"

More Easy-To-Use Features

Store-More™ Full-Width Drawer

A large capacity Cool Zone™ drawer provides enough space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

Effortless™ Glide Crisper Drawers

Keep your fruits and vegetables fresh in our crisper drawers which easily glide out, and are designed to effortlessly close.

Effortless™ Glide Freezer Drawers

Drawers glide out smoothly and fully extend, giving you easy access to what's inside.

Store-More™ Bins

Our gallon-size bins are designed to store more, so you can fit a gallon of milk.

SpillSafe® Glass Shelves

SpillSafe® glass shelves slide out for easy access and are designed to keep spills contained, making cleanup a breeze.

PureAir Ultra® Filters

Our PureAir Ultra® air filters effortlessly keep the air in your refrigerator fresh.

Energy Saver Plus Technology

Express-Select® Controls

Easily select options with the touch of a button.

Automatic Alerts

Refrigerator alerts you if the door is left open or if temperature rises.

ENERGY STAR®

Sabbath Mode (Star-K® Certified)




Available in:

Stainless
(F)

Pearl
(P)

Ebony
(E)

Signature Features




Fits-More™ Capacity

Our Fits-More™ French Door Refrigerator offers more usable space inside, same space on the outside, so you can easily find a place for everything.




SpaceWise® Organization System

Makes it easy to keep food organized and easy to find when you need it with a Store-More™ full-width drawer, gallon-size door bins, and Effortless™ Glide freezer drawers.



Best-in-Class Filtration¹

PureSource Ultra® Filtration is best-in-class so you get cleaner, better-tasting ice at your fingertips.



Quick Ice²

Quick Ice delivers up to 37 percent more ice.




¹As compared to other consumer refrigeration water filtration systems.
²In a 24-hour period.

frigidaire.com

Features	
Door Design	Soft-Arc Doors
Door Handle Design	Stainless Steel (F) Color-Coordinated (P/E)
Cabinet Finish	Grey (S) Color-Coordinated (P/E)
Door Stops/Door Closers	Yes/Yes
Door Hinge Covers	Hidden
Rollers - Front/Rear	Adjustable/Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Pack
Control Features	
Controls	Express-Select
Control Panel Location	Left Door Inside Edge
Number of Control Buttons	5
Ice Option/Freeze Option	Quick Ice/No
Display On/Off Option	
Lock	
Temp./Door Ajar/Power Failure Alerts	Yes/Yes/Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	
Refrigerator Features	
Lighting	Designer
Water Filter Type	PureSource Ultra
Air Filter Type	
Fixed Shelves	
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	4 SpillSafe
Cantilever Shelves	Yes
Store-More® Full-Width Drawer	1 Cool Zone™
Hanging Wine Rack	
Hanging Can Dispenser	
Crisper Drawer	2 Clear
Humidity Controls	2
Dairy Compartment	2 Clear (1 per door)
Store-More® Fixed Door Bins	2 White (1 per door)
Fixed Door Bins	2 Half-Gallon, 2-Liter Clear
Adjustable Door Bins/Dispenser Bin	2 Two-Gallon Clear/No
Non-Slip Bin Liner/Bottle Retainers	
Freezer Features	
Self-Closing Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 Effortless® Glide
Basket Dividers	1 (Bottom Basket)
Lighting	Yes
Ice Maker	Yes
Certifications	
Sabbath Mode (Star-K® Certified)	Yes
ENERGY STAR®	Yes
Specifications	
Total Capacity (Cu. Ft.)	22.6
Refrigerator Capacity (Cu. Ft.)	15.70
Freezer Capacity (Cu. Ft.)	6.90
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW rating) @ 120 Volts¹	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	345 Lbs.

Lot 86 PC
Feb 19/14

Standard Refrigerator Depth vs. Counter Depth

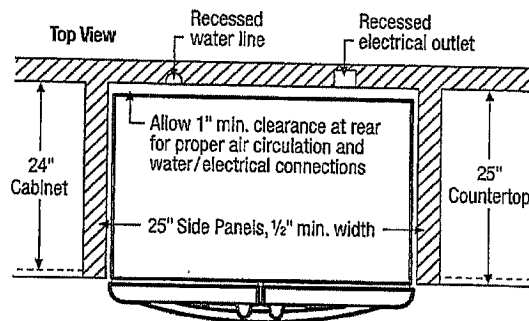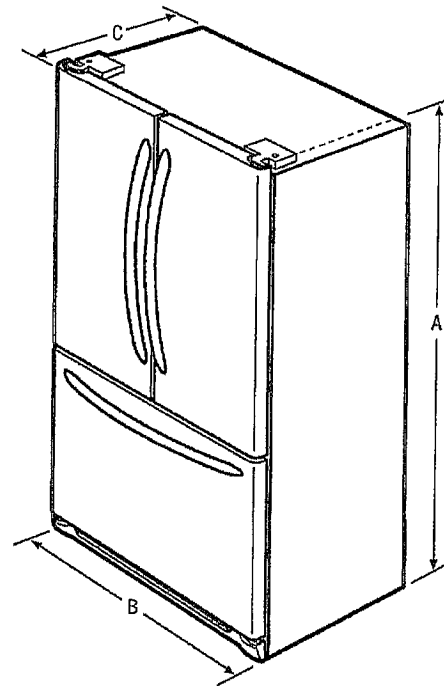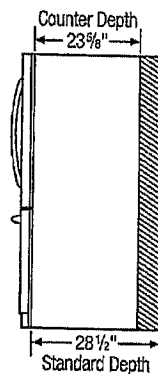

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Height (Incl. Hinges & Rollers)	69-3/8"
B - Cabinet Width/Door Width	35-5/8"/36"
C - Depth (Incl. Door)	28-1/4"
Depth with Door Open 90°	42-9/16"
Depth with Drawer Fully Extended (Incl. Handle)	45-5/8"

"Built-In Look" Cutout Dimensions	
Height (Incl. Hinges and Rollers)	70-1/4"
Width	36"
Depth	25"

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available on the web at frigidaire.com


FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGHG2344M 05/11

© 2011 Electrolux Home Products, Inc.

Specifications subject to change.
Printed in the U.S.A.

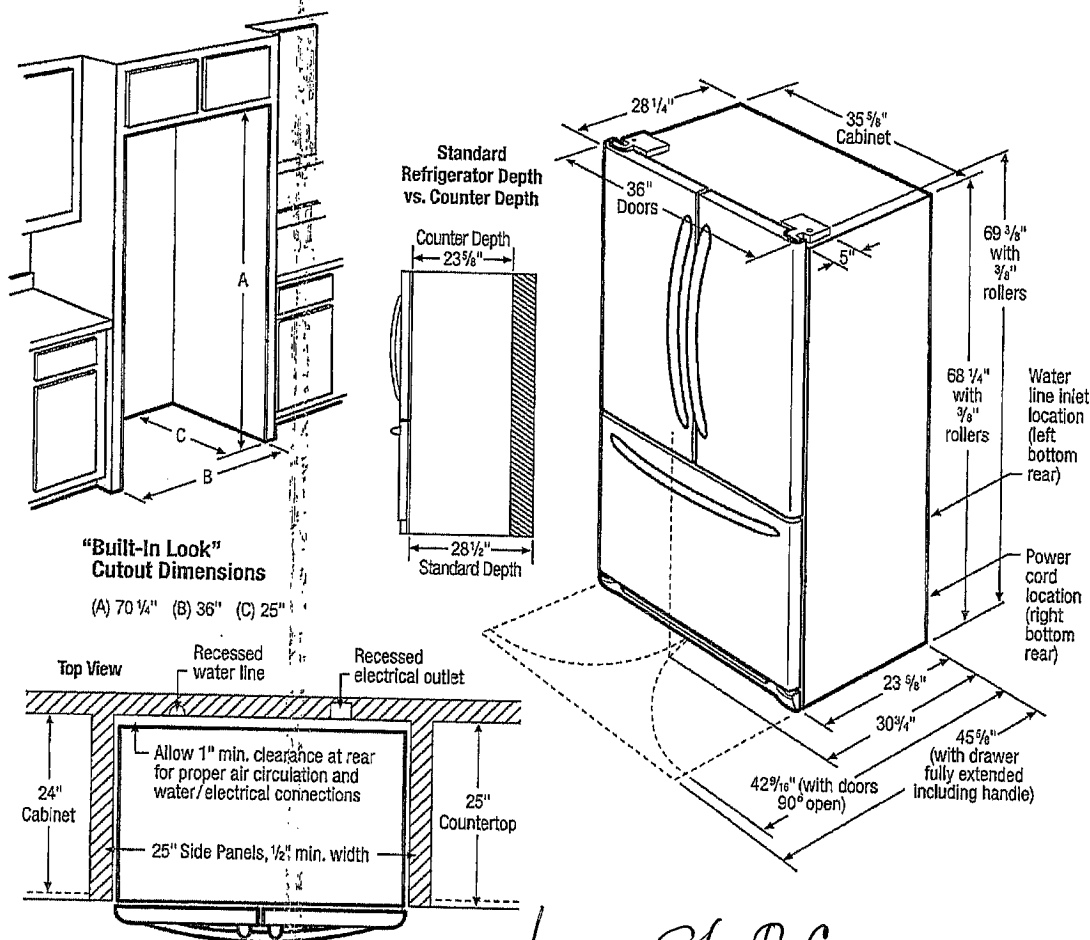

Lot 86 RC
Feb 18/14

French Door Refrigerator Specifications

- Product Shipping Weight (approx.) - 345 Lbs.
- An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
- Voltage Rating - 120V/60 Hz/15 or 20 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.

- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure - Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 25" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3J2 • 1-800-265-8352 • frigidaire.ca
FGHG2344M 02/11

© 2011 Electrolux Home Products, Inc.



Specifications
subject to change.
Printed in the U.S.A.

Specifications	CGEF3077K	CGEF3057K	CGEF3055K	CGEF3055K	CGEF304DK
Oven Interior Depth	19-1/8"	19-1/8"	19-1/8"	19-1/8"	18-7/8" (Upper) 19-3/8" (Lower)
Oven Interior Height	22-1/4"	22-1/4"	22-1/4"	22-1/4"	16-1/2" (Upper) 8-3/8" (Lower)
Oven Interior Width	24-3/8"	24-3/8"	24-3/8"	24-3/8"	24-1/8" (Upper) 24-3/8" (Lower)
Power Supply Connection Location	Centerline Lower Rear	Centerline Lower Rear	Centerline Lower Rear	Centerline Lower Rear	Rear Bottom
Connected Load (kW Rating) @ 240 / 208 Volts*	13.5 / 10.0	13.5 / 10.0	12.5 / 9.5	12.5 / 9.5	15.4 / 11.6
Voltage Rating	240 / 208V	240 / 208V	240 / 208V	240 / 208V	240 / 208V
Minimum Circuit Required (Amps)	40	40	40	40	50
Depth (w/ Door Open 90°)	48-3/8"	48-3/8"	48-3/8"	48-3/8"	46"
Depth (to Center of Front)	28-1/2"	28-1/2"	28-1/2"	28-1/2"	28-1/2"
Product Weight (Lbs.)	190	190	185	185	250
Approximate Shipping Weight (Lbs.)	210	210	205	205	265

See pages 15 - 16 for Electric Freestanding Range images and features.

* Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz, fused on both sides on line with ground.

NOTE: Always consult local and / or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the Web at frigidaire.ca.

We reserve the right to change specifications or discontinue models without notice.

30" Electric Freestanding Ranges

CGEF3077K / CGEF3057K / CGEF3056K / CGEF3055K / CGEF3044K / CGEF304DK


29-7/8" W x 47" H x 28-1/2" D

CGEF3057K


LOT 86 PC Feb 19/14

48


52

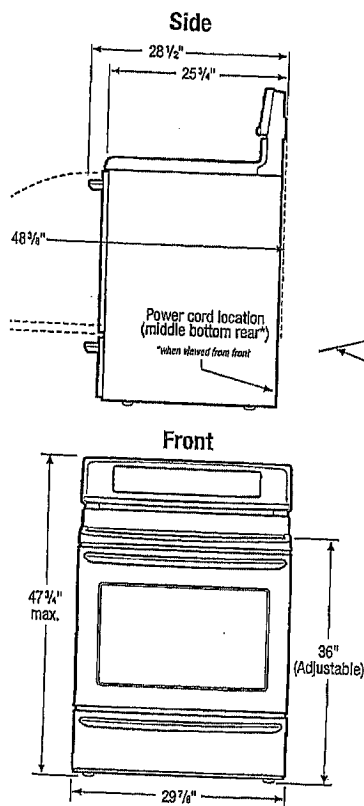

Standard Freestanding Range

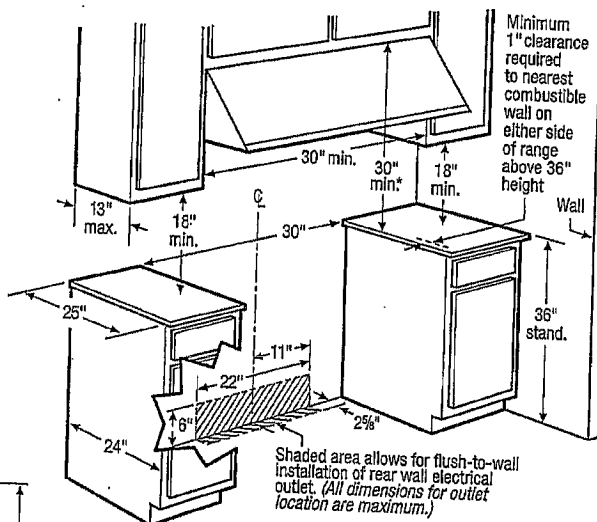

*Note: 30" minimum clearance between top of cooking surface and bottom of unprotected wood or metal overhead cabinet; or 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/4" flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper. 0" clearance is minimum for rear of range. Follow all dimension requirements provided above to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

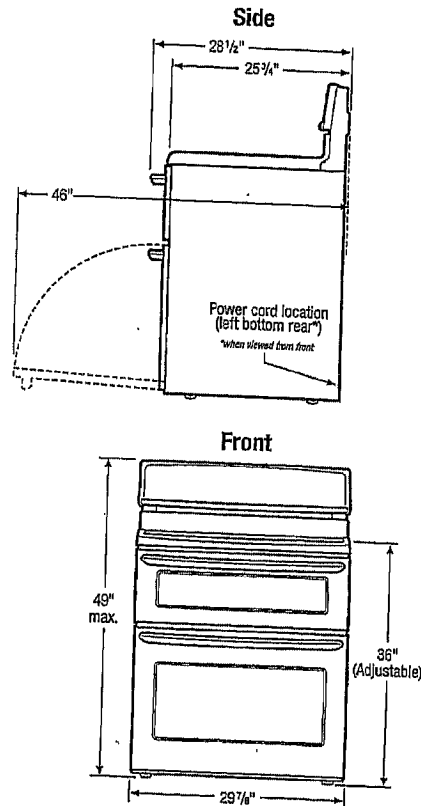

Double-Oven Freestanding Range

Electric Freestanding Range Specifications

ELECTRIC FREESTANDING RANGES					
	CGEF3077K	CGEF3057K	CGEF3055K	CGEF3055K	CGEF304DK
Colours	• Black (B) • White (W)	• Real Stainless Steel (F)	• Real Stainless Steel (F)	• Black (B) • White (W)	• Real Stainless Steel (F)
Range Width	29-7/8"	29-7/8"	29-7/8"	29-7/8"	29-7/8"
Range Height	47"	47"	47"	47"	47"
Range Depth (including door)	28-1/2"	28-1/2"	28-1/2"	28-1/2"	28-1/2"
Exterior Features					
Oven Control / Timing System	Express-Select™ Controls	Express-Select™ Controls	Express-Select™ Controls	Express-Select™ Controls	Express-Select™ Controls
Cooking Surface	Upswept Black Glass Smoothtop	Upswept Black Smoothtop	Upswept Black Smoothtop	Upswept Black Smoothtop	Upswept Black Smoothtop
Window	Wide View	Wide View	Wide View	Wide View	Extra-Large
Exterior Door Finish	Glass	Real Stainless Steel	Real Stainless Steel	Glass	Real Stainless Steel
Handle Design	Stainless Steel	Stainless Steel	Stainless Steel	Colour-Coordinated	Stainless Steel
Convection System	True Convection	True Convection	True Convection	True Convection	True Convection
Exterior Finish	Painted	Real Stainless Steel	Real Stainless Steel	Painted	Real Stainless Steel
Cleaning System	Self-Clean	Self-Clean	Self-Clean	Self-Clean	Self-Clean
Drawer Functionality	Warmer Drawer	Warmer Drawer	Storage	Storage	Bake and Warm Oven
Oven Controls					
Bake	Yes	Yes	Yes	Yes	Yes
Power Broil	Broil Variable (400 – 500 °F)	Broil Variable (400 – 500 °F)	Broil Variable (400 – 500 °F)	Broil Variable (400 – 500 °F)	Broil Variable (400 – 500 °F)
Effortless™ Convection Conversion	Yes	Yes	Yes	Yes	Yes (Lower)
Convection Bake	Yes	Yes	Yes	Yes	Yes (Lower)
Convection Broil	Yes	Yes	Yes	Yes	Yes
Convection Roast	Yes	Yes	Yes	Yes	Yes (Lower)
Quick Bake Convection	No	No	No	No	No
Quick Preheat	Yes	Yes	Yes	Yes	Yes
My Favourite	No	No	No	No	No
Chicken Nugget Button	Yes	Yes	Yes	Yes	Yes
Pizza Button	Yes	Yes	Yes	Yes	Yes
Keep Warm	Yes	Yes	Yes	Yes	Yes
Add-a-Minute	Yes	Yes	Yes	Yes	Yes
Delay Bake	Yes	Yes	Yes	Yes	No
Delay Start	Yes	Yes	Yes	Yes	No
Self-Clean	2, 3, 4 Hours	2, 3, 4 Hours	2, 3, 4 Hours (Scroll Thru)	2, 3, 4 Hours (Scroll Thru)	2, 3, 4 Hours (Scroll Thru)
Cooktop Features					
Right Front Element (Size / Watts)	12/9/6" / 2,700W	12/9/6" / 2,700W	12/9" / 2,700W	12/9" / 2,700W	9/12" / 1,700 / 2,700W
Right Rear Element (Size / Watts)	6" / 1,200W	6" / 1,200W	6" / 1,200W	6" / 1,200W	6" / 1,200W
Left Front Element (Size / Watts)	9/6" / 3,000W	9/6" / 3,000W	9/6" / 3,000W	9/6" / 3,000W	6/9" / 1,600 / 3,000W
Left Rear Element (Size / Watts)	6" / 1,200W	6" / 1,200W	6" / 1,200W	6" / 1,200W	6" / 1,200W
Center Element (Size / Watts)	Warming Zone	Warming Zone	Warming Zone	Warming Zone	Warming Zone / 100W
Oven Features					
Capacity (Cu. Ft.)	6.0	6.0	6.0	6.0	2.3 (Upper) 4.3 (Lower)
Hidden Bake Element	Yes	Yes	Yes	Yes	Yes
Oven Light	Standard	Standard	Standard	Standard	Standard
Rack Configuration	1 Heavy-Duty, 1 SpaceWise™ Half Rack, 1 Effortless™ Rack, 1 Deep Sump	1 Heavy-Duty, 1 SpaceWise™ Half Rack, 1 Effortless™ Rack, 1 Deep Sump	1 Heavy-Duty, 1 SpaceWise™ Half Rack, 1 Effortless™ Rack, 1 Deep Sump	1 Heavy-Duty, 1 SpaceWise™ Half Rack, 1 Effortless™ Rack, 1 Deep Sump	3 w/ 1 Heavy-Duty Handle Rack, 1 Half Rack, 1 Auto Rack
Power Broil	Power Broil	Power Broil	Power Broil	Power Broil	Even Broil
Baking System	Even Baking Technology	Even Baking Technology	Even Baking Technology	Even Baking Technology	Even Baking Technology
Bake Element (Watts)	3,500	3,500	3,500	3,500	2,500
Broil Element (Watts)	3,900	3,900	3,900	3,900	6 Pass 3,400W

Specifications (cont.)	FGHD2491L	FGHD2471K	FGHD2461K	FGHD2455L	FGBD2451K	FGHD2433K	FGBD2432K	FGBD2431K
Power Supply Location	Right Bottom Front	Right Bottom Front	Right Bottom Front	Right Bottom Front	Right Bottom Front	Right Bottom Front	Right Bottom Front	Right Bottom Front
Voltage Rating	120V / 60Hz / 15A	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹	120V / 60Hz / 15A (Max 20A) ¹
Connected Load (kW Rating) @ 120 Volts ²	1.44	1.44	1.44	1.44	1.44	1.44	1.44	1.44
Amps @ 120 Volts	10	10	10	10	10	10	10	10
Approximate Shipping Weight (Lbs.)	83	83	83	83	83	83	83	83

See pages 17 – 18 for Built-In Dishwasher images and features.

¹ Maximum of 20 Amps if connected with disposer.



² For use on adequately wired 120V, dedicated circuit having 2-wire service with separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and / or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the Web at frigidaire.com. We reserve the right to change specifications or discontinue models without notice.

24" Built-In Dishwashers

FGHD2491L / FGHD2455L

23-3/4" W x 35" H x 25-3/8" D

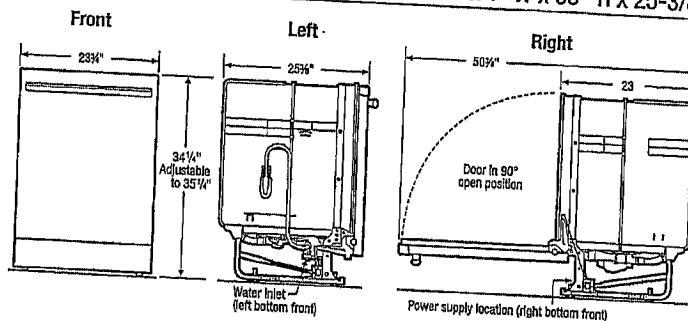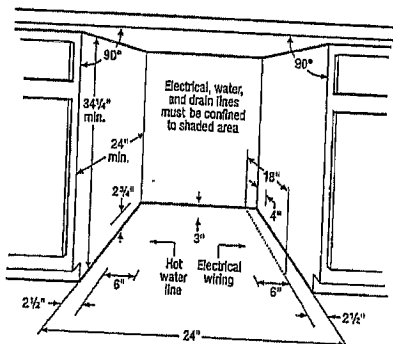

52



Lot 86 PC
Feb 19/14

24" Built-In Dishwashers

FGHD2471K / FGHD2461K / FGBD2451K /

FGHD2433K / FGBD2432K / FGBD2431K


24" W x 35" H x 25" D

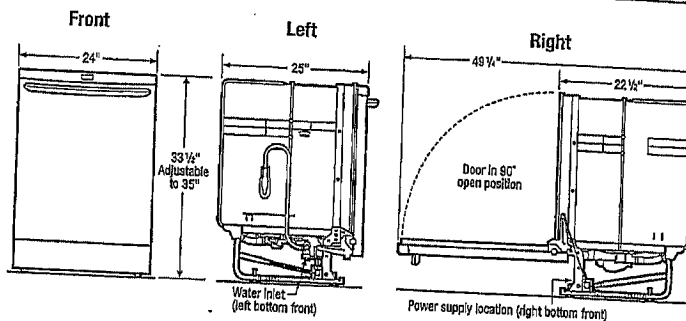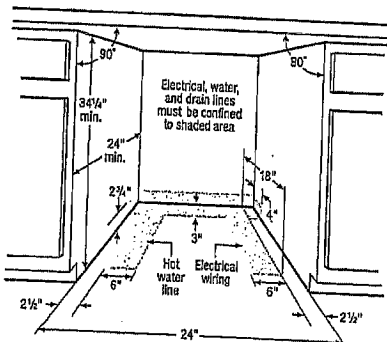

Built-In Dishwasher Specifications


BUILT-IN DISHWASHERS	FGHD2491L	FGHD2471K	FGHD2461K	FGHD2455L	FGBD2451K	FGHD2433K	FGBD2432K	FGBD2431K
Colours	• Black (B) • White (W)	• Black (B) • White (W)	• Black (B) • White (W)	• Stainless Steel (F) • Black (B) • White (W)	• Stainless Steel (F) • Black (B) • White (W)	• Stainless Steel (F) • Black (B) • White (W)	• Stainless Steel (F) • Black (B) • White (W)	• Real Stainless Steel (F) • Black (B) • White (W)
Width	23-3/4"	24"	24"	24"	24"	24"	24"	24"
Height (Max)	35"	35"	35"	35"	35"	35"	35"	35"
Depth	25-3/8"	25"	25"	25-3/8"	25"	25"	25"	25"
Features								
Control Design	Fully-Integrated Express-Select™	Fully Integrated	Fully Integrated	Slimline Express-Select™	Slimline	Fully Integrated	Slimline	Slimline
Digital Display	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Door Handle	Yes	Yes	Yes	Yes	Yes	Yes	No	No
Stay-Put Door Hinge Design	Yes	Yes	Yes	Yes	Yes	Yes	No	No
Low Rinse-Aid Indicator	Yes	Yes	Yes	Yes	Yes	Yes	No	No
Interior Design	Tall Tub	Tall Tub	Tall Tub	Tall Tub	Tall Tub	Tall Tub	Yes	Yes
Interior Colour	Stainless Steel	GraniteGrey™	GraniteGrey™	Stainless Steel	GraniteGrey™	GraniteGrey™	White	Tall Tub
Wash System	Direct	Direct	Direct	Direct	Direct	Direct	Direct	White
Wash Levels	5	5	5	5	5	5	Direct	Direct
Wash Speeds	1	3	3	1	0	3	5	5
Smart Soil Sensor™	Yes	Yes	Yes	Yes	Yes	Yes	0	0
Sound Package	SilentDesign™	UltraQuiet™ Plus	UltraQuiet™ Plus	SilentDesign™	UltraQuiet™ IV	UltraQuiet™ Plus	Yes	No
dB Rating	51	53	53	51	54	53	UltraQuiet™ IV	UltraQuiet™ III
Cycles								
Number of Cycles	6	7	7	5	5	7	4	4
Options								
Drying System	Effortless™ Dry	Effortless™ Dry	Effortless™ Dry	Static	Effortless™ Dry	Effortless™ Dry	Effortless™ Dry	Effortless™ Dry
Heat / No Heat Dry	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Hi-Temp Wash	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NSF® Cert. Sanitize Rinse	Yes	No	No	No	Yes	Yes	Yes	Yes
Delay Start	1 - 24 Hours	1 - 24 Hours	1 - 24 Hours	1 - 24 Hours	No	No	No	No
Rack System								
Silverware Basket	3-Piece Split	3-Piece Splittable	3-Piece Splittable	3-Piece Splittable	3-Piece Splittable	3-Piece Splittable	Ultra I	Ultra I
Rack System	Deluxe	Premium	Premium	Premium	Premium	Premium	Premium	Deluxe
Rack Coating	Nylon Tuf Racks™	Nylon Tuf Racks™	Nylon Tuf Racks™	Nylon Tuf Racks™	Nylon Tuf Racks™	Nylon Tuf Racks™	Nylon Tuf Racks™	PVC
Rack Handles	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Stemware / Champagne Glass Holders	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fold-Down Tines	2 Full Rows	Yes	Yes	2 Full Rows	Yes	Yes	Yes	Yes
Cup Shelf	2	2	2	2	2	2	Yes	No
Certifications								
ENERGY STAR®	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NSF®	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Specifications								
Cut-Out Depth (Min.)	24"	24"	24"	24"	24"	24"	24"	24"
Cut-Out Height (Max.)	35-1/4"	35-1/4"	35-1/4"	35-1/4"	35-1/4"	35-1/4"	35-1/4"	35-1/4"
Cut-Out Height (Min.)	34-1/4"	34-1/4"	34-1/4"	34-1/4"	34-1/4"	34-1/4"	34-1/4"	34-1/4"
Cut-Out Width (Min.)	24"	24"	24"	24"	24"	24"	24"	24"
Depth (w/ Door Open 90°)	50-3/8"	49-1/4"	49-1/4"	50-3/8"	49-1/4"	49-1/4"	49-1/4"	49-1/4"
Water Inlet Location	Left Bottom Front	Left Bottom Front	Left Bottom Front	Left Bottom Front	Left Bottom Front	Left Bottom Front	Left Bottom Front	Left Bottom Front
Water Usage (Gallons)	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5	4.9 - 8.5
Water Pressure (PSI)	20 - 120	20 - 120	20 - 120	20 - 120	20 - 120	20 - 120	20 - 120	20 - 120
Leveling Legs	4	4	4	4	4	4	4	4

The **BRICK** FRIGIDAIRE GALLERY

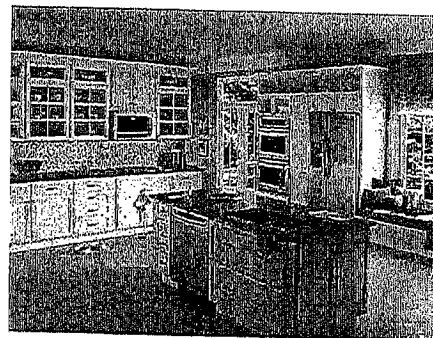

30" Over-The-Range-Microwave

CGMV174KF

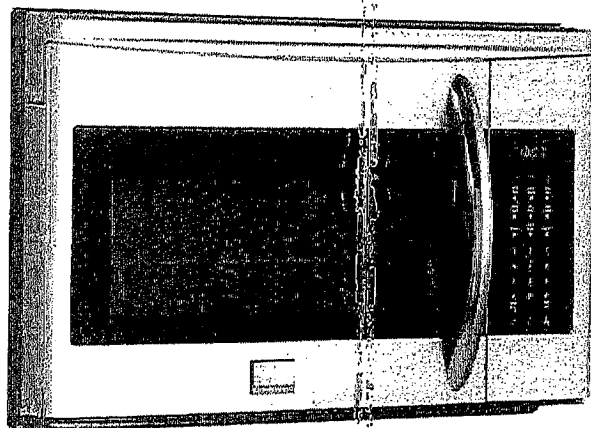

Features:

- 1.7 Cu. Ft.
- Real SS with Protective Coating to reduce fingerprints
- Electronic Touch Control Membrane (Side Control)
- 1,000 Watts
- 11 Power Levels
- 12 Sensor Cook Mode Options: Popcorn (2), Bake Potato, Sensor Cook (5), Veggies (3), Sensor Reheat
- 20 Auto Cook Mode Options: Auto Cook (9), Snack Menu (7), Reheat (4)
- Quick Start (1 – 3 minutes)
- Add 30 Seconds
- 2 Speed Ventilation

Cut Out Dimensions


H	16-3/8"
W	30"
D	16-15/16"

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.thebrick.com

LOT 86 RC
Feb 19/14


The **BRICK.** FRIGIDAIRE

affinity.

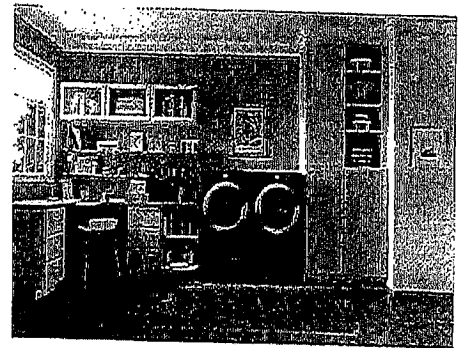

Affinity Electric Washer


FAFW3801LW

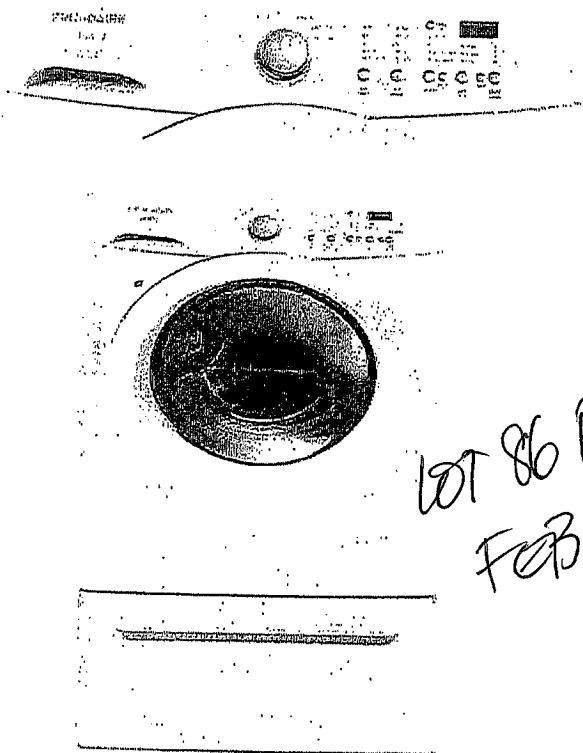

LOT 86 RC
FEB 19/14

Features:

- 3.8 Cu. Ft. I.E.C. Drum Capacity Electric Washer
- Monochromatic Door Knob & Buttons
- Silent Design Sound Package
- 5 Cycle Count Heavy Duty Normal Casual Rinse/Spin
- Clean Washer Cycle
- 4 Cycle Status Lights
- Door Lock Sensing Wash Touch pause to Add a Garment
- 3 Soil Levels
- Electronic Controls w/Digital Display
- Last Cycle Memory 1100 RPM
- Freshwater Rinse
- Stay-Put Door Latch
- 2nd Floor Installation Ready – Vibration Control System




CUT OUT DIMENSIONS

H	36"
W	27"
D	31"

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.thebrick.com


The **BRICK.** FRIGIDAIRE

affinity.

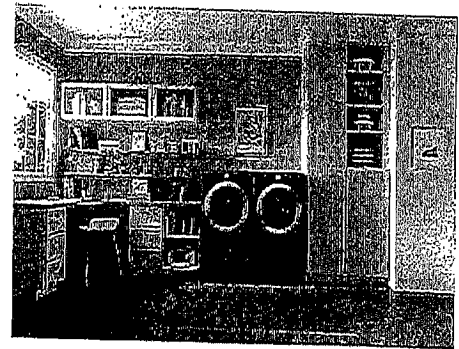

Affinity Electric Dryer

CAQE7001LW

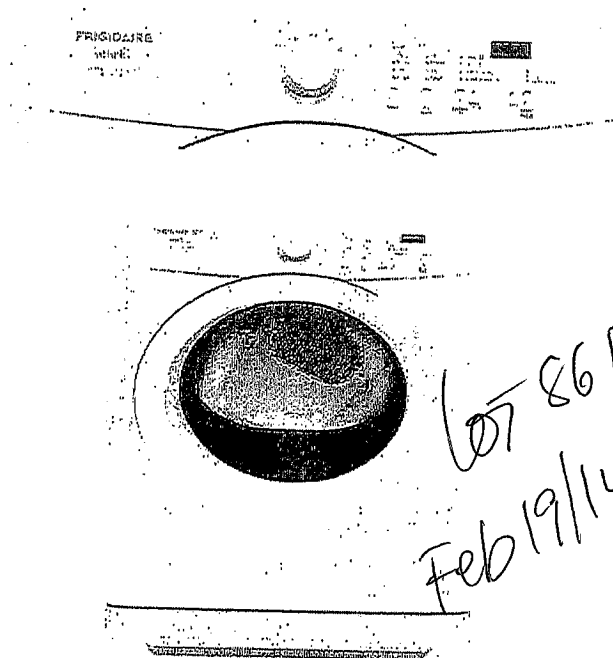

Features:

- 7.0 Cu. Ft. Drum Capacity
- Monochromatic Door & Accents
- Painted Drum
- Single Element Heater System
- 2 Moisture Sensors with 4 Touch Points
- 5 Cycle Selections: Heavy Duty, Normal, Casual, 2 Timed Dry Cycles
- 5 Temperatures Selections
- Drum Light
- Wrinkle Release
- Chime End of Cycle Signal
- 60 & 30 Minute Timed Dry Cycles
- 200 CFM Blower
- 4-Way Venting
- Incandescent Drum Light
- Reversible Door
- AVAILABLE IN GAS (FAQG7001LW)

Clear Cut Dimensions

H	36"
W	27"
D	31"

Dimensions to be used for preliminary planning only not for construction purposes. Please visit our website for detailed and up to date features and dimensions at www.thebrick.com