

STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER _____

See Specs

UPGRADED APPLIANCE OPENINGS

*Check all that apply - NON-STANDARD APPLIANCE OPTIONS

NOTE: When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

****MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED****

36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code)

Gas Stove

Slide-In Stove

Cooktop

*(Gas/Electric – Cut-out Charge & Plug Required)

Built-In Wall Oven

Hood Fan (may require larger vent, charges will apply – **6" is standard**)

8" Vent / 10" Vent

Chimney hoods **CENTRE VENT ABOVE STOVE (clearance space will be left with this appliance will not butt up against cabinetry)

Built-In Microwave with Trim Kit

Built-In Microwave Drawer with Trim Kit

Warming Drawer

OTR – Over The Range Microwave *Plug required

Built-in Refrigerator/Sub Zero – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24"

*Applicable charges may apply if required to due to space accommodations

*Note: Refrigerator Door Swing

Wine / Bar Fridge (electrical required)

Steam Oven / Built-In Coffee makers

Cargo Waste Bin systems

Front Load Washer & Dryer *(Specs required if installing counter above)

Stackable Washer & Dryer

WMS **NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

WMS Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

WMS If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specifications are to be sent to the Zancor Décor Centre no later than _____

Appliance Specifications received _____

Purchaser Signature _____

Date August 16

Purchaser Signature _____

Date August 16

PROJECT Candler Sockl.

LOT 11-S



COAST Wholesale
APPLIANCES

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.
L4K 5V8 *** TOLL FREE 1-888-745-0622
PH:(905)856-0007 FX:(905)856-5325
TORONTO LINE:(416)745-0622



CHBA
MEMBER
Since 1976

"Innovative Products for Builders, Designers & Home Owners"

Sold JOSEPH VUKMAN

To: LOT 11 SOUTH CASTLES OF KING
KING CITY
ON L9L 9L9

Ship JOSEPH VUKMAN

To: LOT 11 SOUTH CASTLES OF KING
KING CITY
ON L9L 9L9
647-209-8854

SALES ORDER

Customer Class		Builders Allowance Name # / Amount \$		Ship Via	Invoice #
003 BLDR CUST SALES		#		\$	1332466
Sales Representatives		Address:	Terms	Prov. Tax #	Customer #
F8 WAYNE W/ 18,7		LOT 11S CASTLES OF KING	CASH SALES		GY512
		Shipping Location	Date Ordered	Date Allocated	Date Required
		WOODBIDGE WHSE	24AUG16	28APR17	Order Type
		Customer P.O. #	Job #:	Change Order #:	
Quantity Ordered	Quantity Shipped	Model / Description		Price	Extension
1	1	BI-36U/S/THLH SUB ZERO 36"SS B/M TUBULAR HANDLES, L/H			on all appliances red knobs
1	1	GR366 WOLF 36" SS GAS RANGE W/6 SEALED BURNERS			
1	1	SU5436X CONVECTION OVEN, NAT.GAS			
1	1	D5436XLS SIRIUS PROFESSIONAL WALL HOOD FAN SS			
1	1	WFW75HEFW CHIMNEY 36" 1200CFM			
1	1	YWED75HEFW ASKO 24" DISHWASHER, FRONT LCD/ LED			
1	1	48372 CONTROLS TURBO DRY,6 PROGRAMS SS			
1	1	W10298318RP WHIRLPOOL FRONT LOAD WASHER WHITE			
1	1	W10298318RP WHIRLPOOL STACKING KIT			
1	1	INSTALLATION - INSTA			
1	1	BA FRIDGE BASE			
1	1	BA RANGE BASE			
1	1	BA D/W BASE			
Legend: * = Eco Fee Applicable, K = Keep for future shipment					
SUBTOTAL					
PST					
DEL/FUEL S/C					
HST					
TOTAL					

Report to:

SM	CR	Shipper	Date Shipped	EXTENDED WARRANTY	
				ACCEPTED	REJECTED

GST# 81398 6668

PAGE 1 OF 2

Date: 08/24/2016 Time: 13:07:54

NOW 15 LOCATIONS TO SERVE YOU

www.coastappliances.com

Customer Copy

1757737-01/0000001



COAST Wholesale
APPLIANCES

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.
L4K 5V8 *** TOLL FREE 1-888-745-0622
PH:(905)856-0007 FX:(905)856-5325
TORONTO LINE:(416)745-0622



"Innovative Products for Builders, Designers & Home Owners"

SALES ORDER

Sold JOSEPH VUKMAN
To: LOT 11 SOUTH CASTLES OF KING
KING CITY
ON L9L 9L9

Ship JOSEPH VUKMAN
To: LOT 11 SOUTH CASTLES OF KING
KING CITY
ON L9L 9L9
647-209-8854

Customer Class		Builders Allowance Name / # / Amount \$		Ship Via	Invoice #	
003 BLDR CUST SALES		#		\$	1332466	
Sales Representatives		Address:	Terms	Prov. Tax #	Customer #	
FB WAYNE W/ 18,7		LOT 11S CASTLES OF KING	CASH SALES		GY512	
		Shipping Location	Date Ordered	Date Allocated	Date Required	
		WOODBRIIDGE WHSE	24AUG16	28APR17		
		Customer P.O. #	Job #:	Change Order #:		
Quantity Ordered	Quantity Back	Quantity Shipped	Model / Description		Price	Extension
1	1	1	BA HOODFAN BASE CONTRACT BUILDERS ALLOW HOODFAN BASE			
1	1	1	BA WASHER BASE CONTRACT BUILDERS ALLOW WASHER BASE			
1	1	1	BA DRYER BASE CONTRACT BUILDERS ALLOW DRYER BASE			
1	1	1	BA HOSES BA HOSES			
1	1	1	BA STACKER BASE CONTRACT BUILDERS ALLOW STACKER BASE			
1	1	1	BA BUILDERS ALLOWANCE			
			CREDIT FOR INSTALL STANDARD PACKAGE			
Legend: * = Eco Fee Applicable, K = Keep for future shipment						
18	18					
SUBTOTAL						
PST						
DEL/FUEL S/C						
HST						
TOTAL						

Report to:			
SM	CR	Shipper	Date Shipped
			EXTENDED WARRANTY ACCEPTED REJECTED

Date: 08/24/2016 Time: 13:07:54

NOW 15 LOCATIONS TO SERVE YOU

www.coastappliances.com

GST # 81398 6668

PAGE 2 OF 2

Customer Copy

1757737-01/0000001

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB•ZERO

BI-36 U/S

106115



FEATURES

Aug 25/16

- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Clear-view, triple-pane and UV-resistant glass door
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- "Soft bright" interior lighting
- Over-and-under refrigerator/freezer storage
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

ACCESSORIES

- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit
- Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator



HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves
- 1 Stationary door shelf
- Adjustable dairy compartment

FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER


SUB-ZERO

PRODUCT SPECIFICATIONS


Model	BI-36U/S
Dimensions	36"W x 84"H x 24"D
Door Clearance	37 1/4"
Drawer Clearance	23 5/8"
Weight	515 lb
Refrigerator Capacity	16.4 cu ft
Freezer Capacity	5.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35-120 psi

ELECTRICAL

PLUMBING


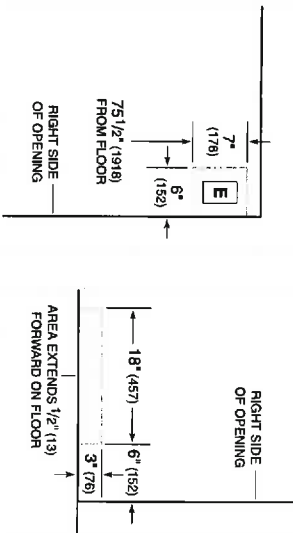


INTERIOR VIEW

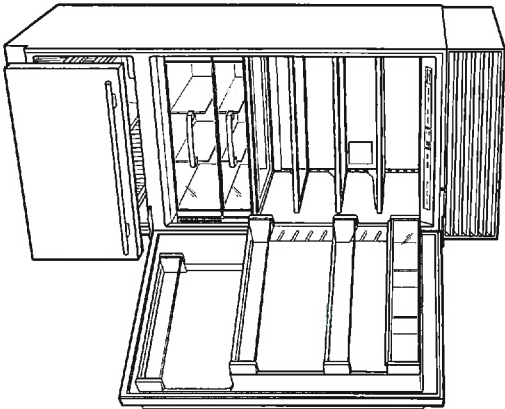

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


STANDARD INSTALLATION

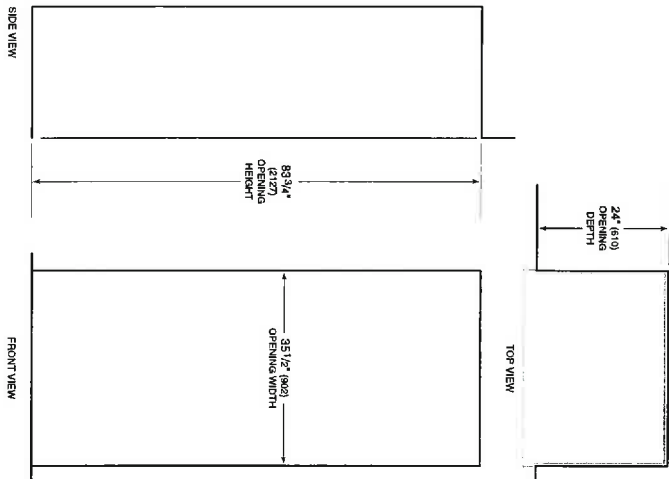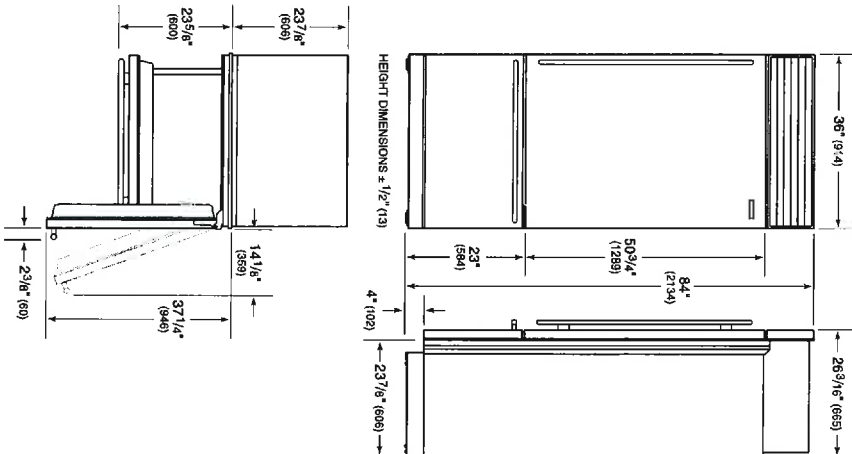

NOTE: Shaded line represents profile of unit.

D5436XLS

Lot 115
Aug 25/16

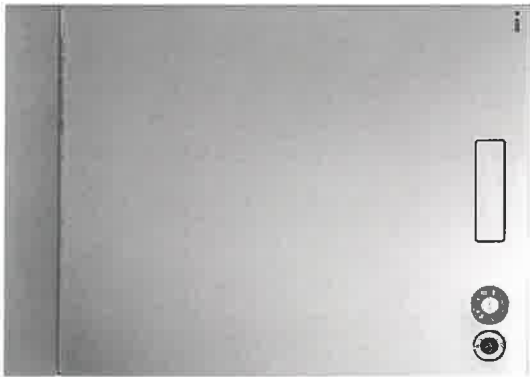

- Turbo Drying**

Top tray for bowls and cutlery

Upper basket type: Premium

Lower basket type: Premium

Separate removable basket

Number of place settings: 16

Top tray functions

InstantLift™ - smart height adjustment of the top tray

Divisible and removable trays

Rack for knives and utensils

Rack for bowls and cups

Telescopic rails

Upper basket functions

Tight mesh base

Multi position wine shelf left

Multi position wine shelf right

Fixed pin rows

Fixed glass support

Wide knife stand

Lower basket functions

Foldable/divisible pin rows rear

Separate removable basket

Programs

Sanitation wash

Normal wash

Heavy wash

Quick wash

ECO wash

Options

Delayed start

Cleaning systems

Number of spray zones: 9

Number of spray arms: 3

WideClean™ - extra washing power for pots and pans

SCS - Super Cleaning System™

Aqua Level™ Sensor

Stainless steel spray arms

Drying system

Turbo Drying™

Features

8 stainless steel parts

Time remaining indicator

Voice signal for the end of washing cycle

Hidden heater

KidSafe - lockable controls

Water safety

Few sealing points outside the container

Long lasting seam welded tank

Waterproof external base

Exterior float

Aqua Detect™ Sensor

Aqua Level™ Sensor

Stand-by water protection

Yes

Max time water intake

Sound alarm

Anti-block drain pump

Installation

Adjustable feet

Multi fit outlet hose

Fixed high loop outlet hose

Trim kit

EAN code: 3838942042188

code: 492231

General

Product: Dishwasher

Mode of installation: Built-in

Size: XL (ADA height compliant)

Touch Screen Display

Number of programs: 7

Noise level: 46 dB(A)

Number of baskets: 3

EAN code: 3838942042188

Dimensions and installation

Height: 32 5/16 (820 mm)

Width: 23 15/16 (608 mm)

Depth: 22 7/8 (581 mm)

Packaging height: 35 1/16 (890 mm)

Packaging width: 25 3/16 (640 mm)

Packaging depth: 26 3/4 (680 mm)

Length electrical cord: 46 7/16 (1180 mm)

Length inlet hose: 66 1/8 (1680 mm)

Length outlet hose: 41 3/4 (1060 mm)

Weight net: 101 lbs

Weight gross: 109 lbs

Technical Information


Voltage: 120 V

Current: 15 A

Consumption

Energy consumption/cycle: 0.87 kWh
- ASKO Appliances North America - PO Box 44848 - MADISON WI 53744
- Customer Contact: CALL 1-800-1-EDSCE AT 9AM AND 10PM

lob 11-S. *[Signature]*
Aug 25/16

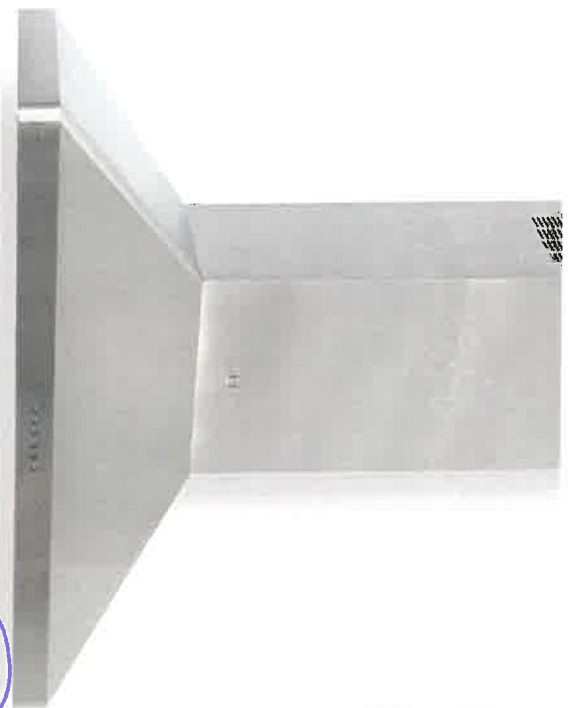

SUS54

- SUS54 36" 42" 48" Motor: **2 x EBM 1100 cfm (Duct Size 8")**
- Pressure: **800 Pa**
- Noise level: 66 dBA/5.1 sones


- Lighting:
 - 2x20W Halogen lamps in 36" version
 - 3x20W Halogen lamps in 42" version
 - 4x20W Halogen lamps in 48" version



- Control panel: 4 speed push-button + timer + light switch



- grease filter: commercial style baffle filters
- Stainless steel: AISI 430

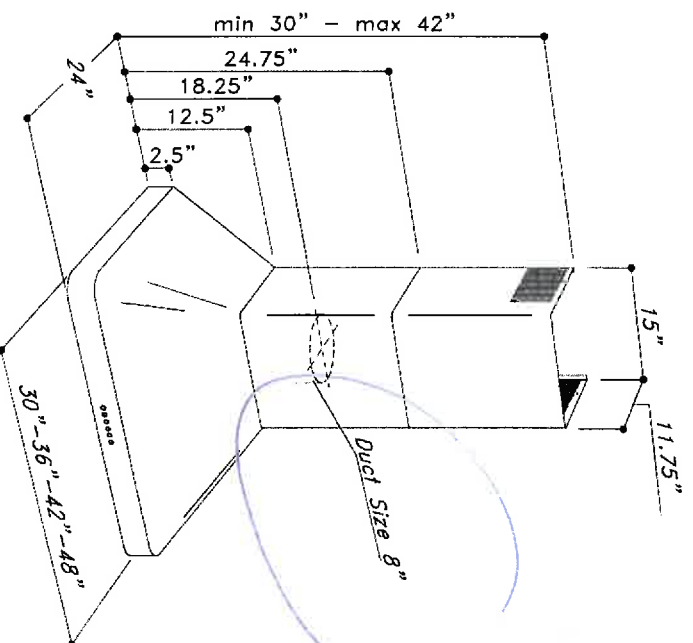

36" GAS RANGE - 6 BURNERS

GR366

Lot 115 ★

FEATURES

6 dual-stacked, sealed burners

Dual-stacked, sealed burners for higher highs, lower lows

Convection oven for faster, more consistent cooking

Infrared broiler inside oven sears quickly and evenly

Heavy-gauge stainless steel

Enhanced views into oven

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Signature red infinite control knobs

Continuous cast-iron grates for easy movement of pots and pans

Individual spark ignition system

Adjustable legs for stability, plus rear casters

ACCESSORIES

Bake stone kit (stone, rack and peel)

Stainless steel, brass or chrome bezels

High altitude conversion kit

Full-extension easy glide oven rack

Cast iron S-grates and wok grate

Stainless steel kickplate

Signature red, black or stainless steel control knobs

Front leg covers

5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/location



KNOB OPTIONS



TOP CONFIGURATION

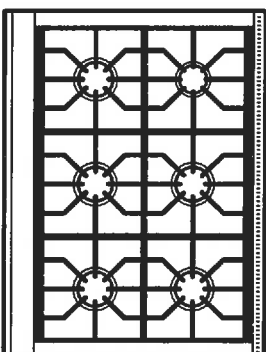

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners

WOLF

DIMENSIONS
Aug 25/16

FRONT VIEW

- Overall Width: 35 7/8" (911)
- Top Panel Width: 37" (940)
- Freezer Section Width: 36" (914)
- Freezer Section Depth: 2 1/2" (64)
- Refrigerator Section Width: 25 3/8" (645)
- Refrerator Section Depth: 37" (940)
- Bottom Panel Width: 37" (940)



SIDE VIEW

- Overall Depth: 28 3/8" (721)
- Refrigerator Section Depth: 27" (686)
- Freezer Section Depth: 9 1/4" (235)
- Top Panel Depth: 56" (1422)
- Refrigerator Section Depth: 46" (1168)
- Freezer Section Depth: 41" (1041)

DETAILS

- Top Panel: 37" (940) MIN TO 38" (965) MAX
- Freezer Section: 2 1/2" (64)
- Refrigerator Section: 25 3/8" (645)
- Bottom Panel: 37" (940)

STANDARD INSTALLATION

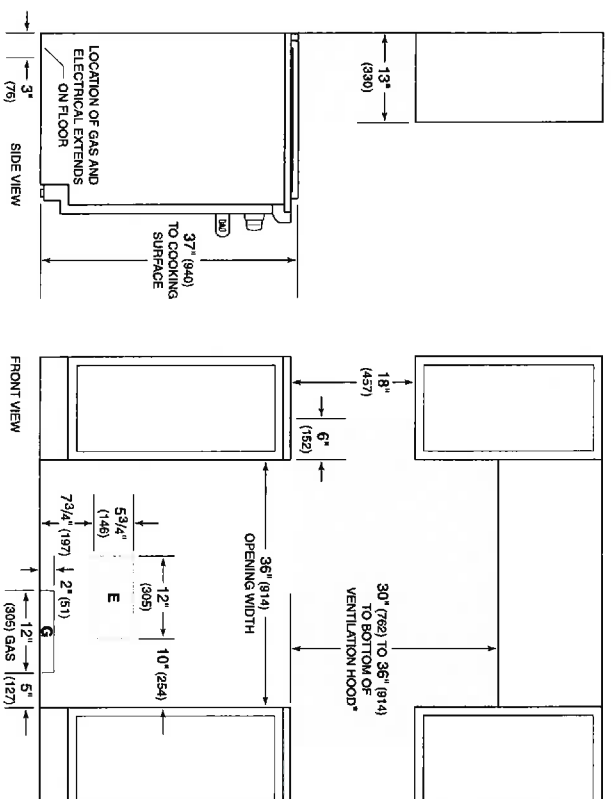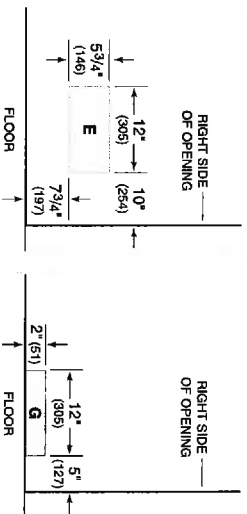

*Without ventilation hood, 42" (1067) minimum clearance counting to combustible materials; cabinet requires non-combustible materials.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.
combustible materials must be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.




Front-Loading Washer

PRODUCT MODEL NUMBERS

WFW88HEA, WFW94HEA, WFW96HEA,
WFW95HED, WFW97HED


Washer Dimensions:

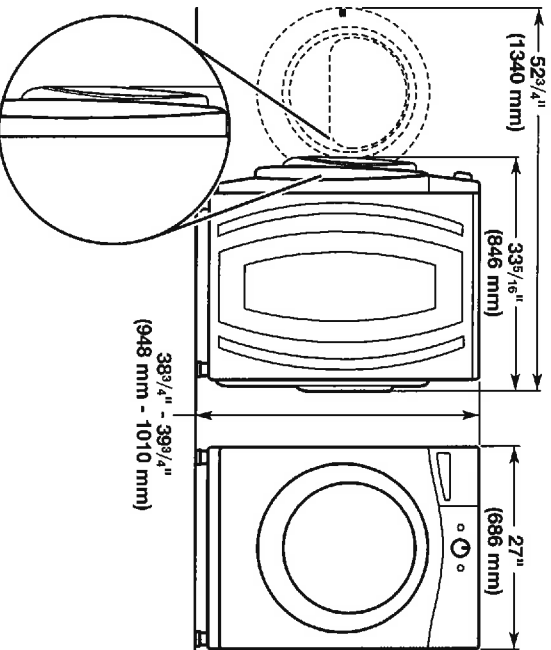


PRODUCT MODEL NUMBERS

WFW61HEB, WFW70HEB, WFW80HEB,
WFW8640B, WFW86HEB, WFW72HED,
WFW81HED, WFW82HED, WFW8740D,
WFW87HED

Washer Dimensions:

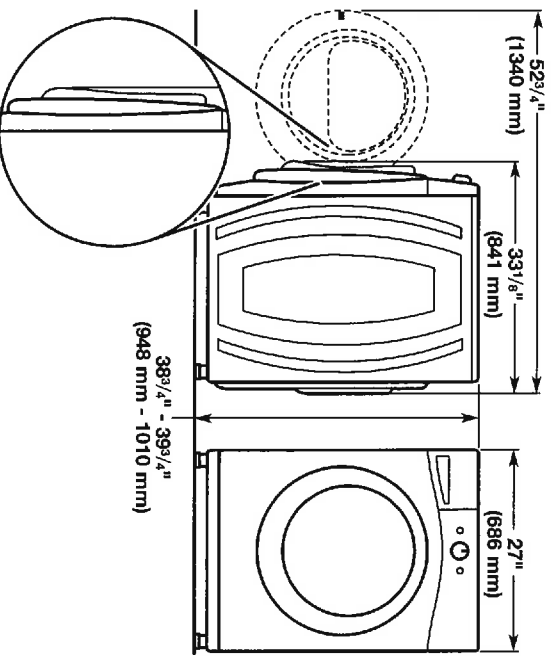


Recessed or closet installation - stacked washer and dryer

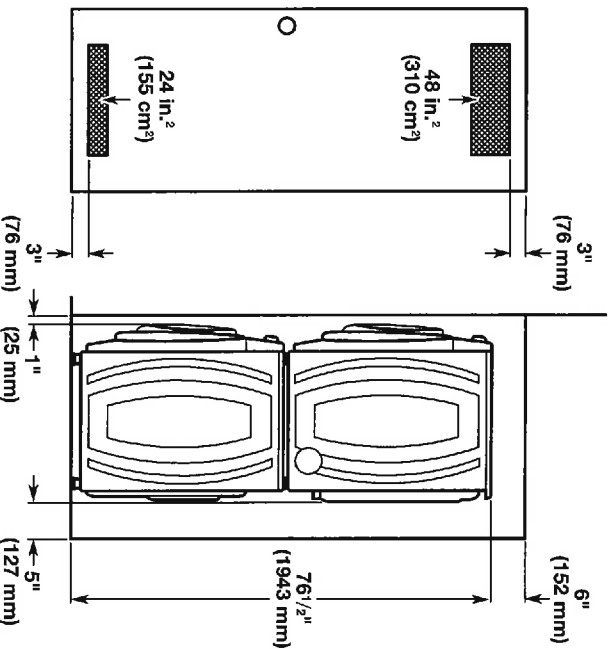

* Add spacing of 1" (25 mm) on all sides of washer/dryer.


Recessed area or closet installation (washer only):

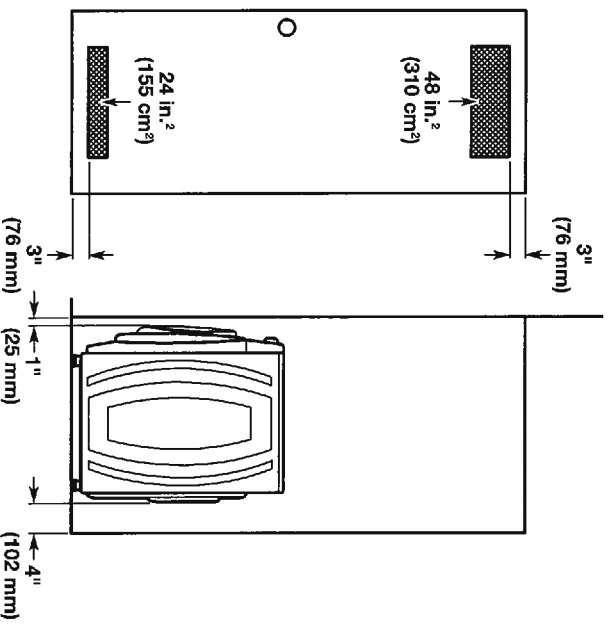

* Add spacing of 1" (25 mm) on all sides of washer.

16611-5 (copy)
August 16

Custom cabinet installation (washer only):

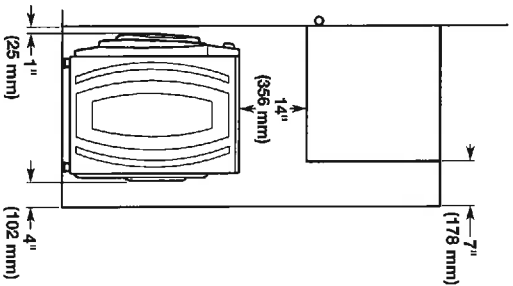

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

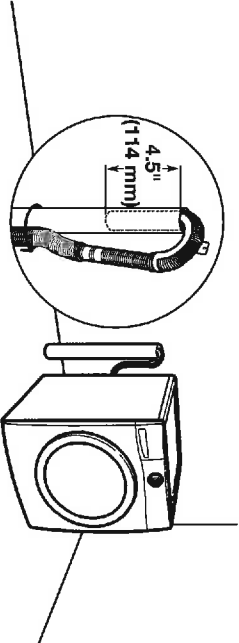


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Wall standpipe drain system

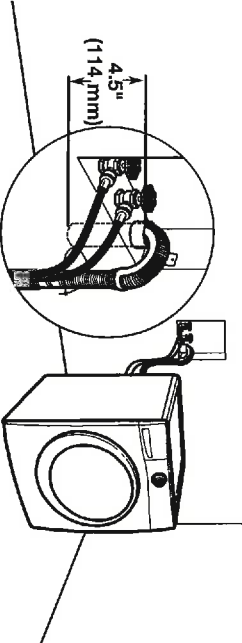

See requirements for floor standpipe drain system.

Undercounter installation - washer only:

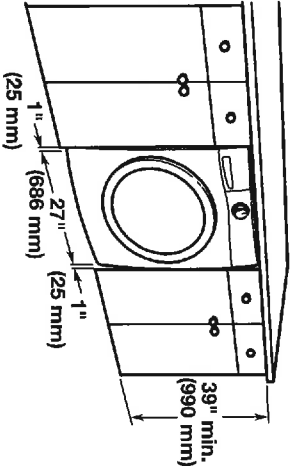


All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.


Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Laundry tub drain system

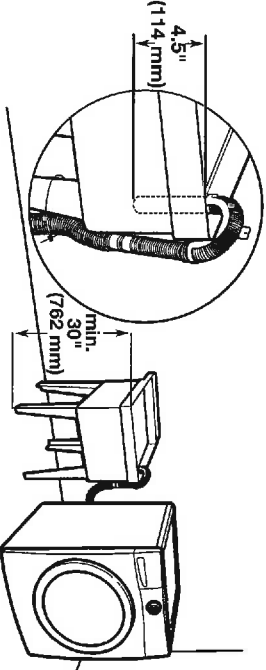

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

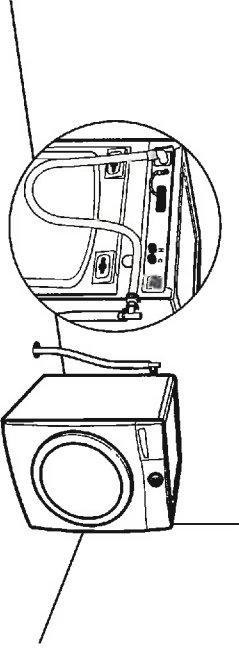

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285663) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

ELECTRICAL REQUIREMENTS

To supply the required 3 or 4 wire, single phase, 120/240 volt, 60 Hz., AC only electrical supply (or 3 or 4 wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended. Connect to an individual branch circuit.


16611-5
Aug 25/16
CJW

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Exhaust hoods:

Recommended Styles:




Louvered Hood



Box Hood

Acceptable Style:



Angled Hood

The Vent System Chart provides venting requirements that will help achieve best drying performance.

Whirlpool Vent System Chart				
Number of 90° elbows	Type of vent	Box/louvered hoods	Angled hoods	
0	Rigid metal	64 ft. (20 m)	58 ft. (17.7 m)	
1	Rigid metal	54 ft. (16.5 m)	48 ft. (14.6 m)	
2	Rigid metal	44 ft. (13.4 m)	38 ft. (11.6 m)	
3	Rigid metal	35 ft. (10.7 m)	29 ft. (8.8 m)	
4	Rigid metal	27 ft. (8.2 m)	21 ft. (6.4 m)	

NOTE: Bottom exhaust installations have a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use following Vent System Chart to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in Vent System Chart. Exhaust systems longer than those specified will:



- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.



Electric Dryer


PRODUCT MODEL NUMBERS

WED72HED, WED81HED, WED8740D, WED87HED, WED95HED, WED97HED

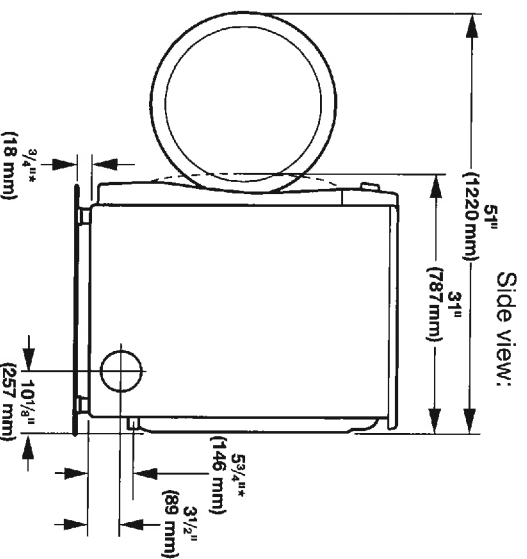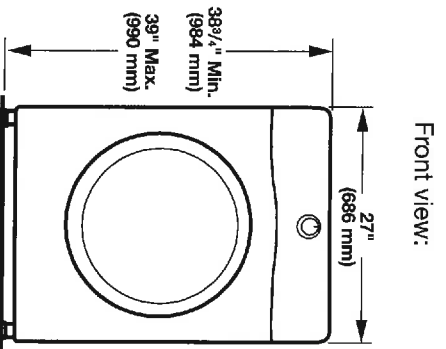

Back view:

Recommended Installation Spacing:

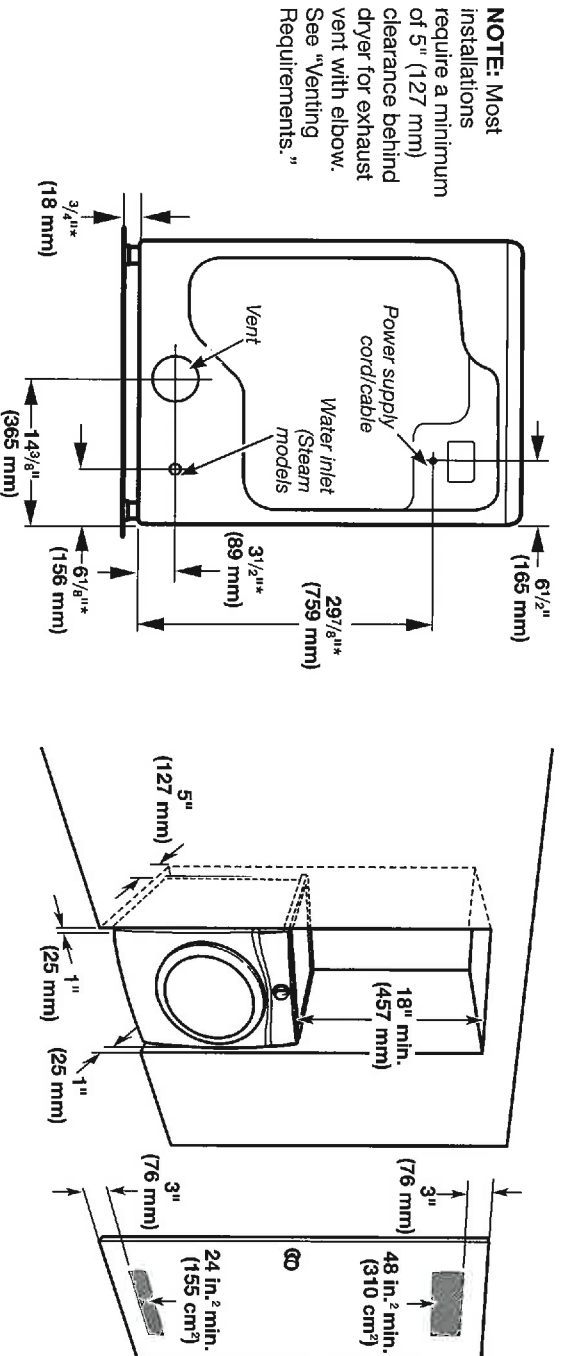

* Approx. measurement.

Installation spacing for recessed area or closet installation

The dimensions shown below are the recommended spacing for this dryer.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable. Companion appliance spacing should also be considered.