

STANDARD APPLIANCE OPENINGS

The purchaser acknowledges the following standard spaces for kitchen appliances:

Range Conventional – 30" Width

Hood Fan – 30" Width (must be the same or larger as range opening as per Ontario Building & Fire Code)

Refrigerator – 36" W x 72" H (Approximate - height may change due to bulkheads)

Dishwasher – 24" Width

6" Exhaust Vent above stove

OTHER _____

UPGRADED APPLIANCE OPENINGS

*Check all that apply - NON-STANDARD APPLIANCE OPTIONS

NOTE: When upgrading appliances, there may be an additional charge to modify cabinetry and/or electrical and plumbing to accommodate the appropriate size from the manufacturer specifications of each appliance.

****MANUFACTURERS SPECIFICATIONS MUST BE ATTACHED****

36" / 42" Stove (Hood fan width will be the same as per Ontario Building Code)

Gas Stove

Slide-In Stove

Cooktop

*(Gas/Electric – Cut-out Charge & Plug Required)

Built-In Wall Oven

Hood Fan (may require larger vent, charges will apply – **6" is standard**)

8" Vent / 10" Vent

Chimney hoods **CENTRE VENT ABOVE STOVE (clearance space will be left with this appliance will not butt up against cabinetry)

☒ Built-In Microwave with Trim Kit

Built-In Microwave Drawer with Trim Kit

Warming Drawer

OTR – Over The Range Microwave *Plug required

Built-in Refrigerator/Sub Zero – If purchasing a side by side or French Door, the wall beside the door may be an issue if it is deeper than 24"

* Applicable charges may apply if required to due to space accommodations

* Note: Refrigerator Door Swing

Wine / Bar Fridge (electrical required)


Steam Oven / Built-In Coffee makers

Cargo Waste Bin systems

Front Load Washer & Dryer *(Specs required if installing counter above)

Stackable Washer & Dryer

 **NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

 Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

 **If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.**

Appliance Specifications are to be sent to the Zancor Décor Centre no later than

Feb 1.

Appliance Specifications received _____

Purchaser Signature _____

Date _____

Purchaser Signature _____

Date _____

PROJECT _____

LOT _____

Paris Kitchens Appliance Sign-off Form
245 West Beaver Creek Rd, Unit 2, Richmond Hill, On, L4B 1L7; 905.886.5751 f:905.886.8858

ZANCOR HOMES - CASTLES OF KING SOUTH

BUILDER NOTIFICATION FOR APPLIANCE SPECIFICATIONS
Please find attached appliance specifications, as provided and signed off by the purchaser.
It is the responsibility of the builder to ensure that any electrical, water supply, gas fittings, venting and any other appliance requirements are reviewed with the purchaser directly. It is also the responsibility of the builder to ensure that they have all relevant appliance spec's, as required to ensure installation of said appliances.

Built-in appliance cut-out process:

- ☐ Once a date has been confirmed for the delivery of your appliances please contact our Customer Service Dept. at Paris Kitchens 905.886.5751
- ☐ We require at least **10 BUSINESS DAYS notice** to set up an appointment. We aim to schedule our Service installers to complete the cut-out(s) the day after the appliances have been delivered. Please keep in mind that all appointments are scheduled between Monday to Friday from 8:00am to 3:00pm. (Not including holidays)
- ☐ After our Service installers have completed the cut-out(s), the installation and connection of the appliances can proceed. We do not install or connect appliances; this must be arranged by the homeowner with the appropriate trades.
- ☐ Please sign-off on the attached package of:
APPLIANCE SPECIFICATIONS (PROVIDED BY PURCHASER)

Appliance specs provided:

- ☐ SEE SPECS
- ☐ PLEASE SIGN ON
- ☐ ALL FOLLOWING
- ☐ SPEC PAGES
- ☐

- Built-In Appliance Installation Application**
- ☒ FLUSH INSTALLATION - Built-in Fridge **"INTERGATED FIT"**
 - ☐ STANDARD INSTALLATION - Built-in Fridge
 - ☐ FLUSH INSTALLATION - Built-in Oven/Micro
 - ☐ EURO FIT - Built-in Oven/Micro
 - ☐ STANDARD INSTALLATION - Built-in Oven/micro
 - ☐ RANGE TOP BUMPED OUT BY _____
 - ☐ COOKTOP BUMPED OUT BY _____
 - ☐
 - ☐

STAINLESS PANEL
FRONTS

Russ Tmezai
Purchaser Name (please print)

Signature _____
PLEASE SIGN

Laura Tmezai
Purchaser Name (please print)

Signature _____

Standard appliance opening sign-off option:

If you have chosen not to supply appliance model's and specifications you may sign -off on "standard openings" provided below.

In doing this you are responsible that the appliances you purchase will fit into the openings provided.

- ☐ 37" wide X 73" high fridge opening
- ☐ 30 1/2" opening for freestanding range
- ☐ 24 1/8" for D/W
- ☐ 30" opening for hood/can

Purchaser Name (please print)

Signature

Purchaser Name (please print)

Signature

LOT # 34N

Date: **September 13, 2016**

30" GAS RANGE

GR304



FEATURES

- Convection oven for faster, more consistent cooking
- Dual-stacked, sealed burners for higher highs, lower lows
- Continuous cast-iron grates for easy movement of pots and pans
- Infrared broiler inside oven seals quickly and evenly
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Individual spark ignition system
- Adjustable legs for stability, plus rear casters

ACCESSORIES


- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION


CUSTOMER SIGNATURE

Please sign

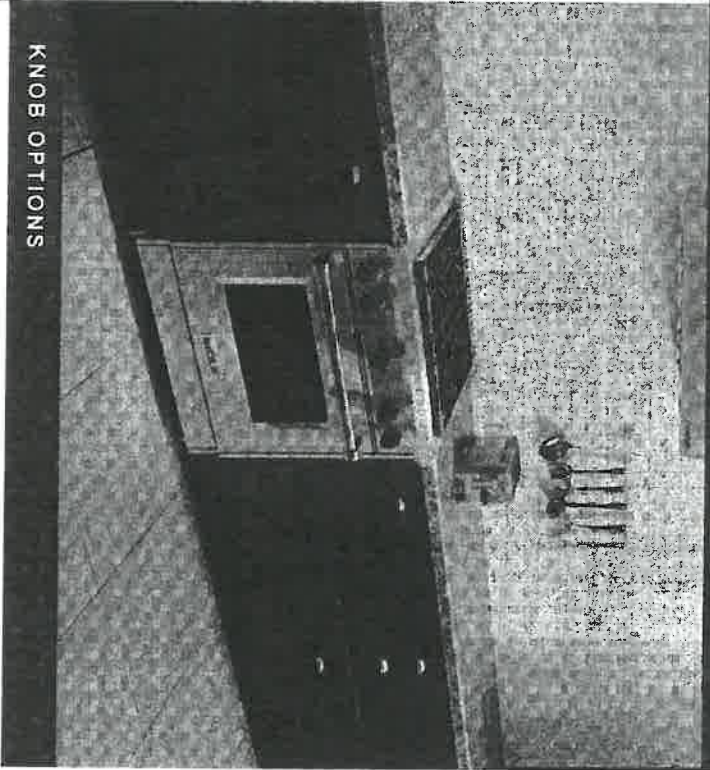

KNOB OPTIONS

TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 3 - 15,000 Btu Burners


X 2

30" GAS RANGE

PRODUCT SPECIFICATIONS

Model	GR304
Dimensions	29 7/8"W x 37"H x 28 3/8"D
Open 1 Interior Dimensions	24"W x 18 5/8"H x 17"D
Open 1 Usable Capacity	2.9 cu ft
Open 1 Overall Capacity	4.4 cu ft
Door Clearance	19 1/2"
Weight	325 lb
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female


ELECTRICAL GAS

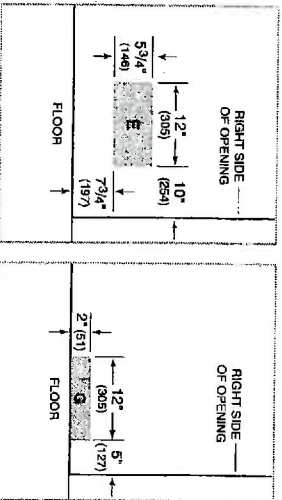


I HAVE READ AND FULLY UNDERSTAND THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

DIMENSIONS

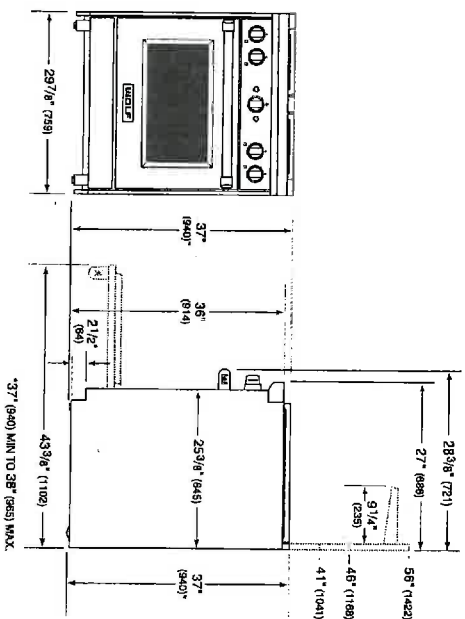

STANDARD INSTALLATION

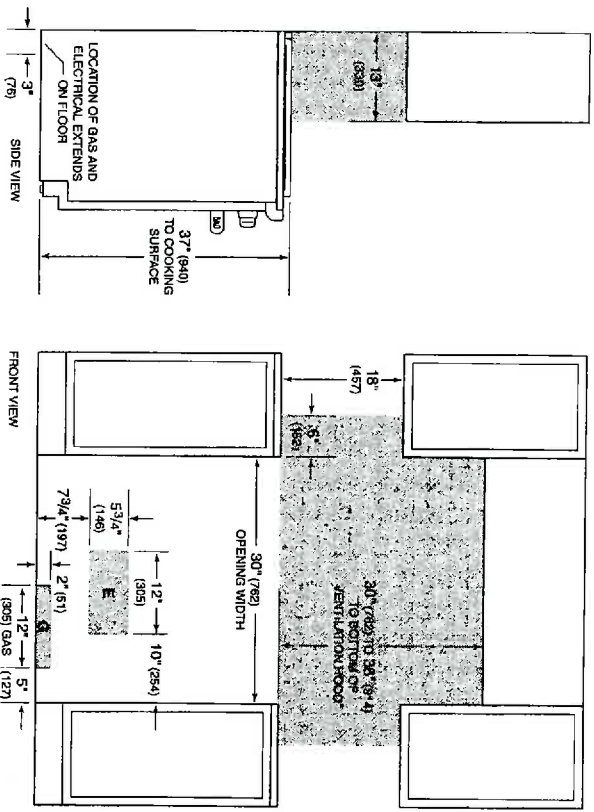

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces. Combustible materials cannot be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

X

2

30" INTEGRATED COLUMN FREEZER WITH ICE MAKER - PANEL READY

SUB-ZERO

IC-30FI



FEATURES

- Ready to be fitted with custom cabinetry or stainless steel panels
- Smart-touch controls for streamlined access to more settings
- "Soft-on" LED lighting is bright and energy-efficient
- Uniform 84" height
- All-freezer storage solves capacity problems
- Automatic ice maker with "max ice" feature
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory


ACCESSORIES

- Dual installation kits
- Stainless steel front panels with tubular or pro handles
- Stainless steel kickplate
- Stainless steel side enclosure
- Stainless steel top enclosure
- Reduced toe kick divider for toe kicks from 3.875" to 2"
- Stainless steel tubular handles
- Stainless steel pro handles
- Replacement water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

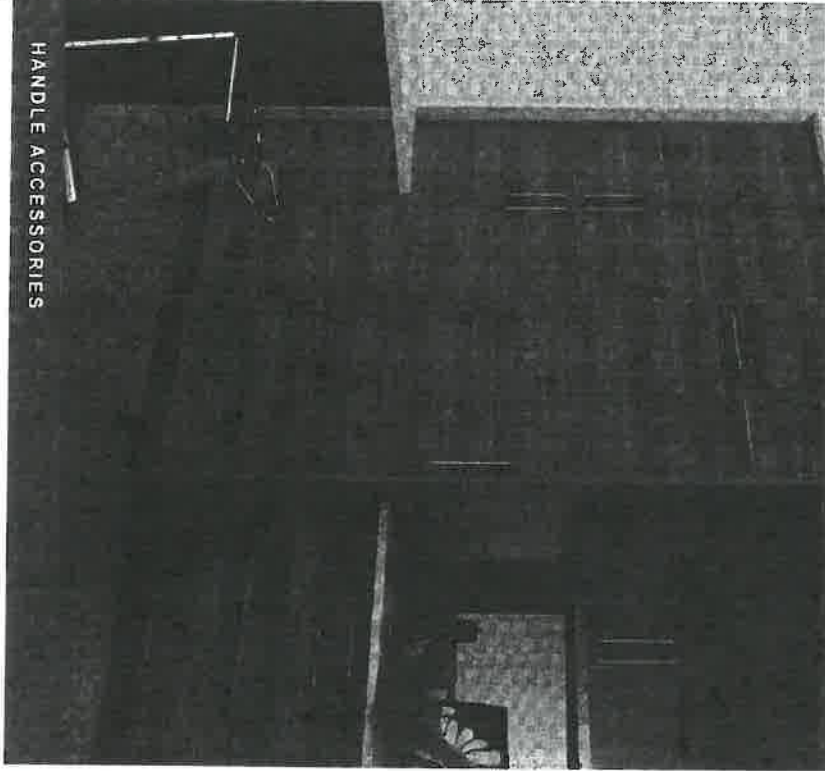

HANDLE ACCESSORIES



PRODUCT DETAILS

FREEZER

- 3 Adjustable wire shelves
- 3 Storage drawers
- 5 Adjustable door shelves
- Ice drawer
- Automatic ice maker


30" INTEGRATED COLUMN FREEZER WITH ICE MAKER - PANEL READY

PRODUCT SPECIFICATIONS


Model	IC-30FI
Dimensions	30"W x 84"H x 24"D
Door Clearance	28 1/2"
Weight	400 lb
Freezer Capacity	15.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35-120 psi

ELECTRICAL

PLUMBING

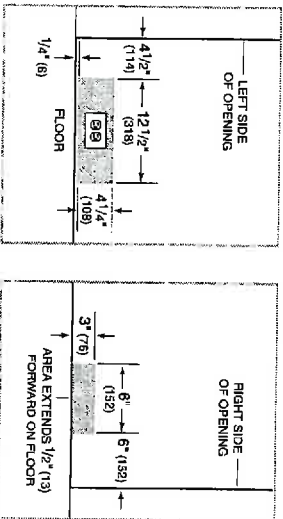

INTERIOR VIEW

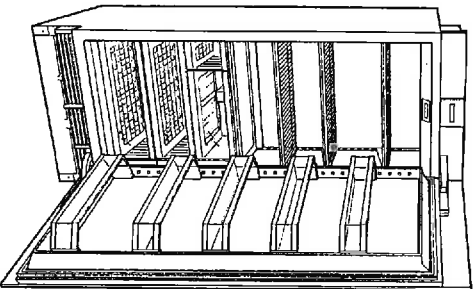


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


I HAVE READ AND FULLY UNDERSTAND THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

DIMENSIONS

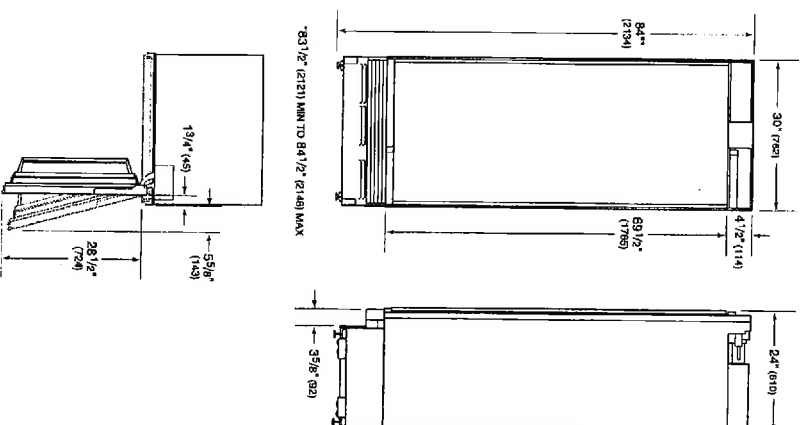

STANDARD INSTALLATION

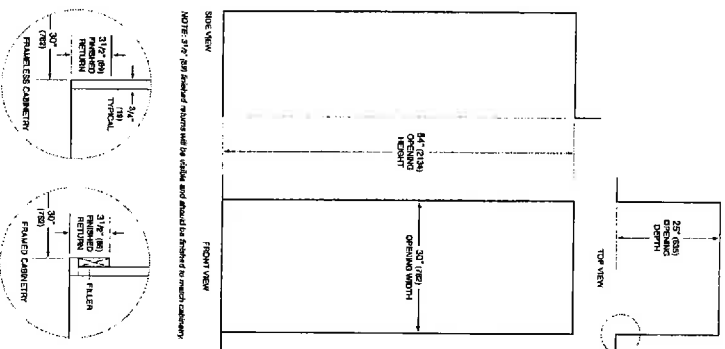

30" INTEGRATED COLUMN REFRIGERATOR - PANEL READY

SUB•ZERO

IC-30R



FEATURES

- All-refrigerator storage solves capacity problems
- Ready to be fitted with custom cabinetry or stainless steel panels
- Nano-coated spill-proof shelves for easy clean-up
- Smart-touch controls for streamlined access to more settings
- *Soft-on® LED lighting is bright and energy-efficient
- Uniform 84" height
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- Soft-close doors and drawers


ACCESSORIES

- Dual installation kits
- Stainless steel front panels with tubular or pro handles
- Stainless steel kickplate
- Stainless steel side enclosure
- Stainless steel top enclosure
- Reduced toe kick divider for toe kicks from 3.875" to 2"
- Stainless steel tubular handles
- Stainless steel pro handles

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/local.

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

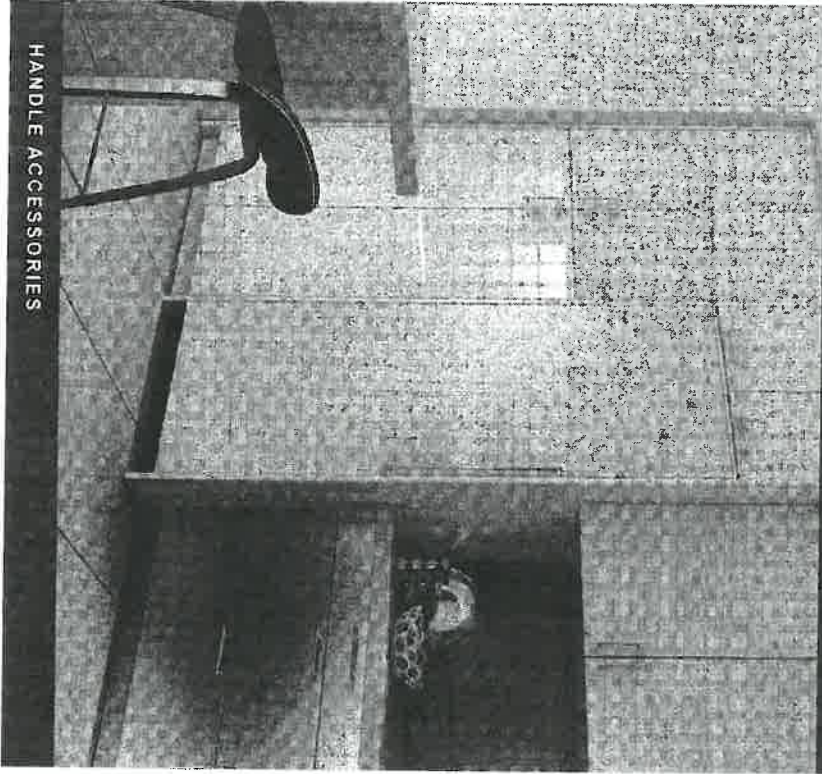

PRO

TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 3 Adjustable glass shelves
- 2 Crisper drawers with dividers
- Deli drawer with dividers
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment


30" INTEGRATED COLUMN REFRIGERATOR - PANEL READY

5000 • ZERO


PRODUCT SPECIFICATIONS

Model	IC-30R
Dimensions	30"W x 84"H x 24"D
Door Clearance	28 1/2"
Weight	400 lb
Refrigerator Capacity	17.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35-120 psi

ELECTRICAL



INTERIOR VIEW


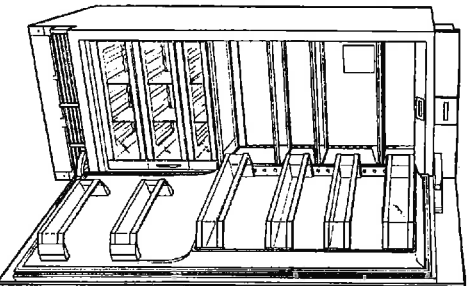


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


**I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION**

CUSTOMER SIGNATURE


DIMENSIONS

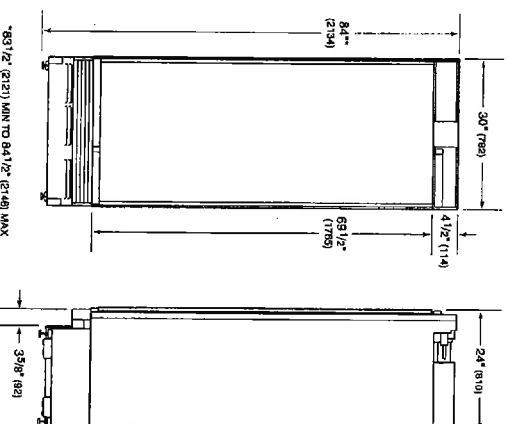

STANDARD INSTALLATION

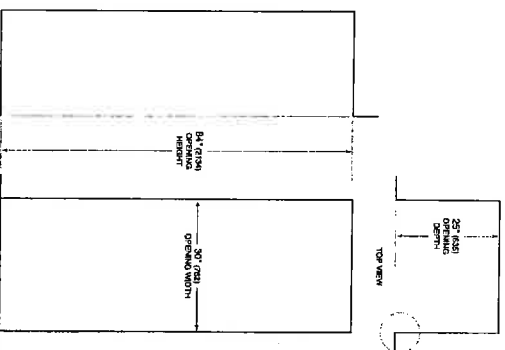

NOTE: 3 1/2" (89) Finished returns will be visible and should be finished to match caliburny.





Home Appliances Combination Ovens

[Consumer](#) [Business](#) [eStore](#) [Support](#) [About Us](#)

FRANÇAIS
[Search](#)



Convection NN-CD989S

SEE PRODUCT PAGE

PRINT

MODEL & SIZE	Model Number	NN-CD989S
	Type	Full Size
	Installation	Counter Top or Built-in
	Oven Capacity	1.5 cu. ft.
	Cooking Power	1,100 Watt
	Tumble Diameter	15"
	Panasonic Inverter®	Inverter®
PANASONIC TECHNOLOGY	Sensor	Prestige® Genius®
	Colour	Stainless Steel
	Control Panel	Dual Dials with Button Panel
DESIGN	Display Panel	6-Digit Expanded Display
	Cooking Options	Microwave Cooking, Convection Cooking, or Combination
	Door Front	Stainless Steel
	Door Window	Reflective Mirror Finish
STYLE	Exterior Wrap	Silver
	Door Release	Push Button
	Oven Interior	Stainless Steel
	Power Settings	10 Levels
PERFORMANCE	Multi-stage Cooking	3 Stages
	Automatic Turntable	Revolving, Removable & Ceramic
	Menu Action Screen	Interactive Multi-Lingual
PROGRAMMABLE FEATURES	Sensor Cook	Sensor & Menu Items
	Sensor Reheat	yes
	More / Less Control	yes
	Inverter® Turbo Defrost	yes
	Keep Warm Button	yes
	Popcorn Button	yes
	Quick Minute	yes
SPECIFICATIONS	Delay Start	yes
	Delay Timer	yes
	Power Requirements	115 V 60 Hz, 12.8 A, 1,472 Watt, AC only
	Cavity Dimensions (W x D x H) (mm / inches)	413 x 427 x 241 mm 16.3 x 16.8 x 9.5 inch
	Unit Dimensions (W x D x H) (mm / inches)	606 x 491 x 376 mm 23.9 x 19.3 x 14.8 inch

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

60" PRO WALL HOOD - 27" DEPTH

WOLF

PW602718


FEATURES

- Heavy-duty stainless steel construction
- Handfinished with hammed edges and welded seams
- Bright halogen lighting
- Infinite speed blower control
- Heat sentry for safety
- Recessed controls for sleeker look
- Blower required (internal, in-line or remote blowers available)
- Heat lamps available for 27" deep models only – bulbs not included
- Transition with backdraft minimizes backward flow of cold air
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

- 38" high stainless steel backsplash with or without warming racks
- 6", 12", 18", 24" and 30" high stainless steel duct covers
- Make-up air damper

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

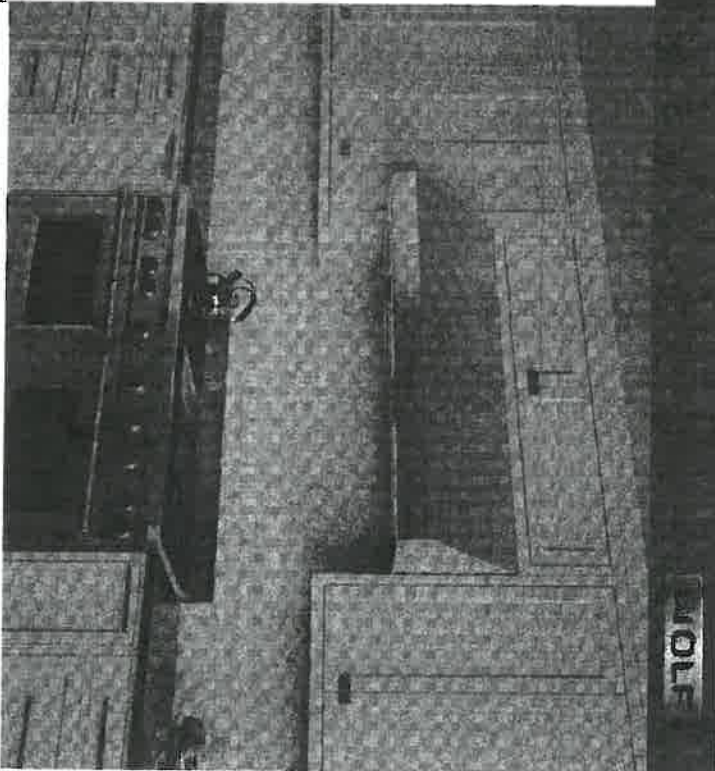

BLOWER OPTIONS

- 300 CFM Internal
- 450 CFM Internal
- 1100 CFM Inline
- 1200 CFM Remote
- 1500 CFM Remote
- 1200 CFM Internal

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE


60" PRO WALL HOOD - 27" DEPTH




PRODUCT SPECIFICATIONS

Model	PW602718
Dimensions	60"W x 18"H x 27"D
Weight	118 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	10" Round
Bottom of Hood to Countertop	30" to 36"

ELECTRICAL



DIMENSIONS

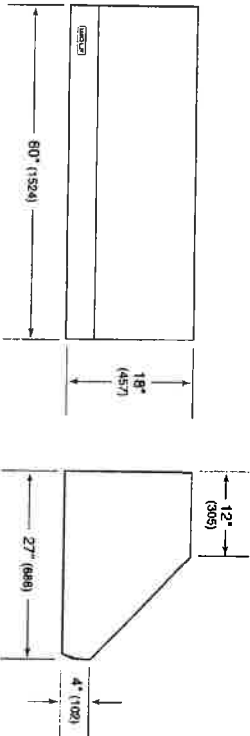

I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

[Handwritten Signature]




ELECTRIC DRYER


PRODUCT MODEL NUMBERS

WED7505F, WED7540F, WED7590F, WED75HEF,
WED7740F, WED77HEF, WED90HEF, WED92HEF, WED85HEF


Front view

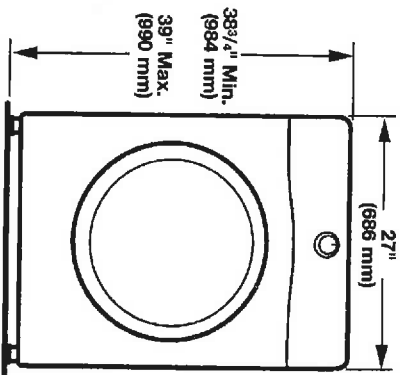

Side view

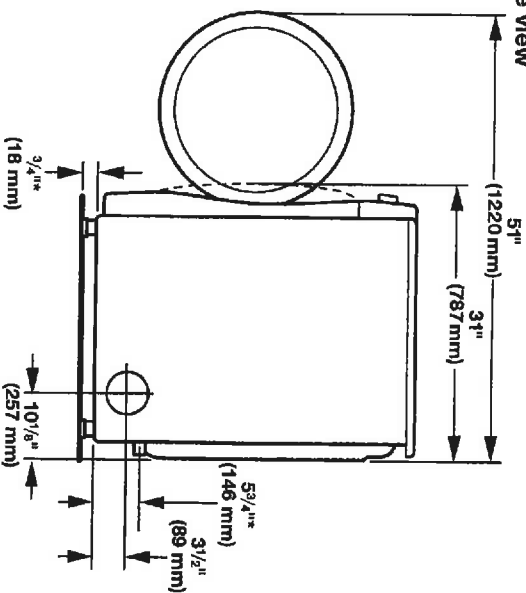


Back view

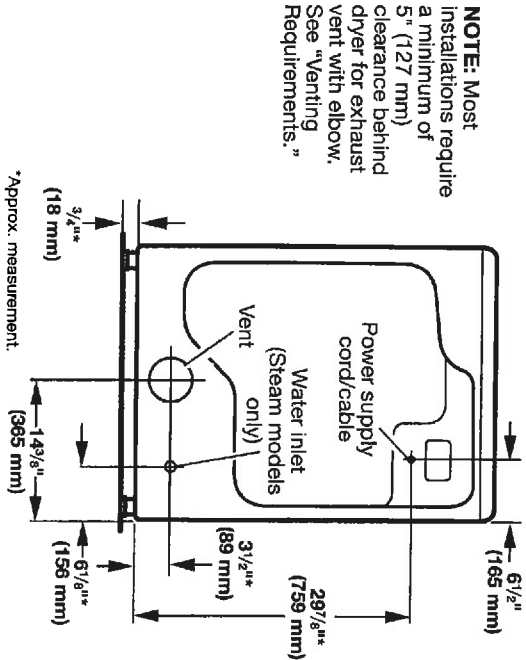

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Recommended installation clearances

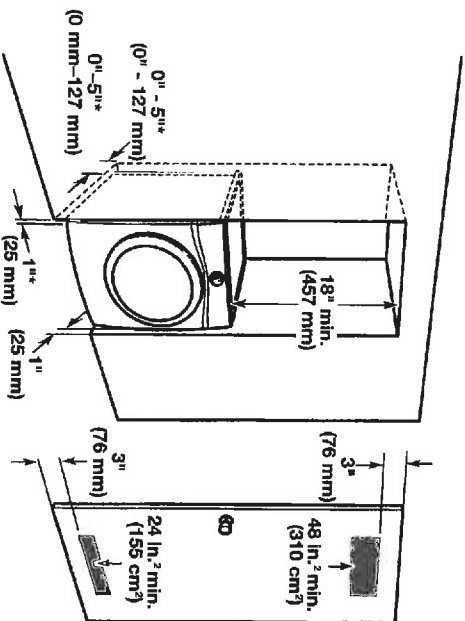

0" (0 mm) spacing is allowed for straight-back venting only. For steam models, minimum 1" (25 mm) spacing is required.

FULLY UNDERSTAND THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

- Spacing for recessed area or closet installation
- All dimensions show recommended and minimum spacing allowed.
- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

W10775223A
05/2016

INSTALLATION REQUIREMENTS

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.

WATER (STEAM MODELS ONLY) REQUIREMENTS


The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses. Do not overtighten. Damage to the coupling can result.

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Exhaust hoods:

Recommended styles:




Louvered Hood



Box Hood

Acceptable style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° elbows as possible.

I HAVE READ AND FULLY UNDERSTAND THIS LAYOUT/QUOTATION

CUSTOMER SIGNATURE

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW7590F, WFW75HEF, WFW90HEF,
WFW92HEF


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F, WFW85HEF

Washer Dimensions:


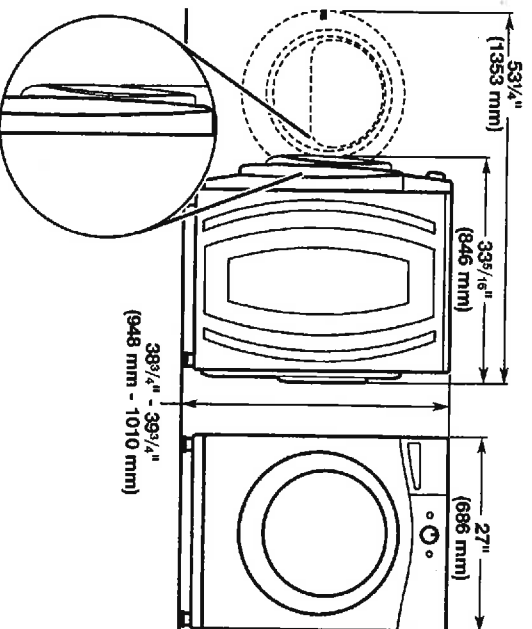


Washer Dimensions:

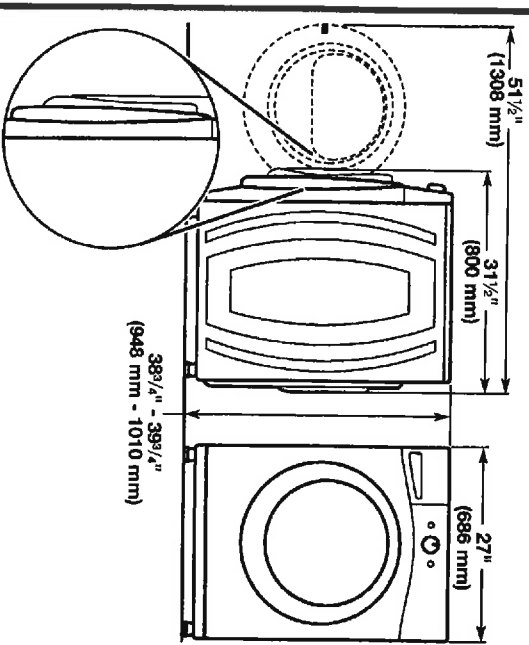

Recessed or closet installation -
stacked washer and dryer

Recessed area or closet installation (washer only):

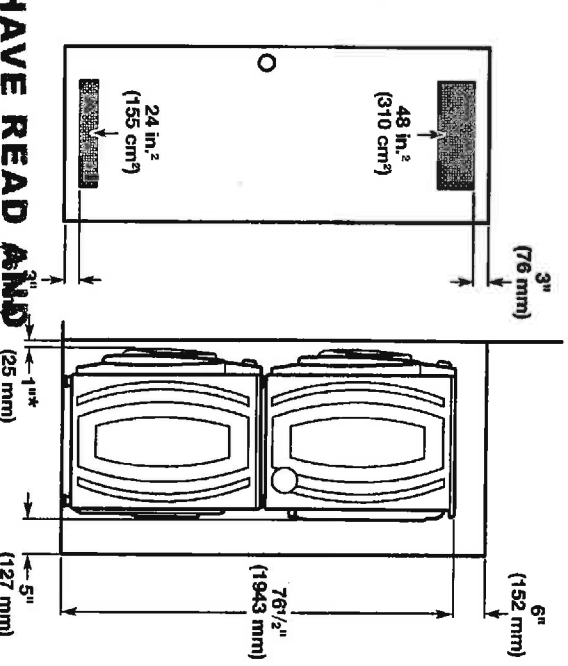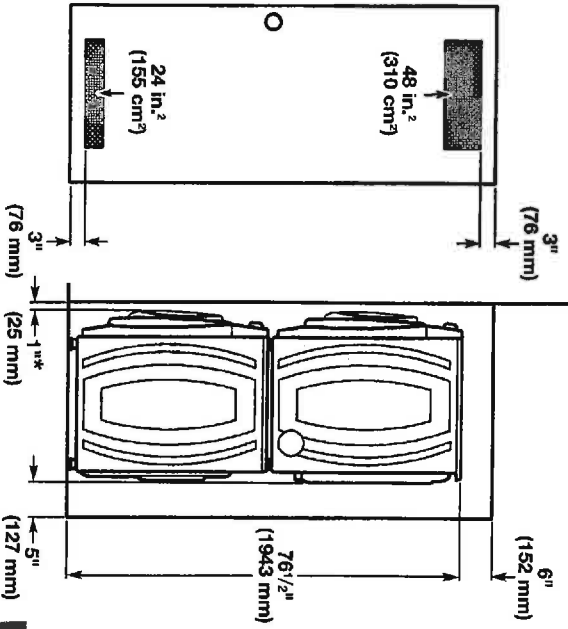


* Add spacing of 1" (25 mm) on all sides of washer/dryer.

**I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION**


CUSTOMER SIGNATURE

W10775528A
05/2016

Custom cabinet installation (washer only):

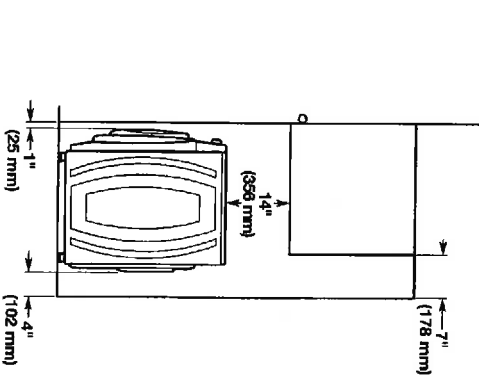

Undercounter installation - washer only:

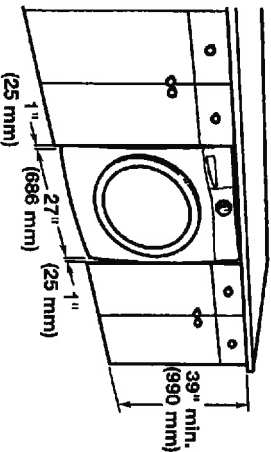

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


ELECTRICAL REQUIREMENTS

A 120 volt, 60 Hz, AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM


Drain system can be installed using a floor drain, wall standpipe, or laundry tub. Select method you need. **IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

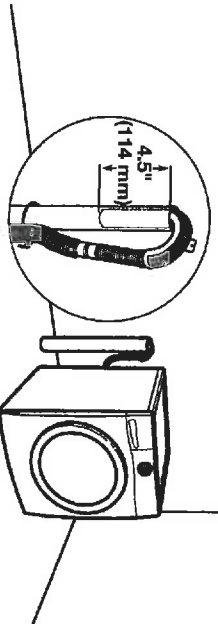


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 l) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

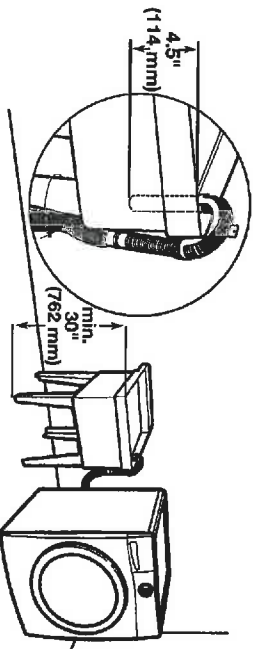


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

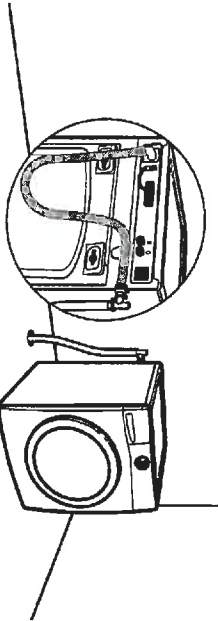

Wall standpipe drain system

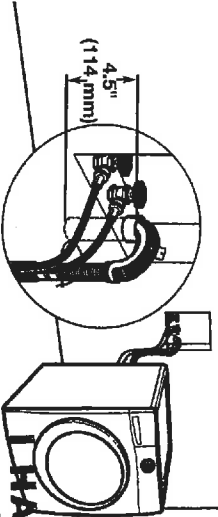

Floor drain system requires a Siphon Break Kit (Part Number 285835), Siphon Break Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be used separately. See "Alternate Parts". Minimum siphon hose length is 30" (762 mm) from bottom of washer. (Additional hoses may be needed.)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

CUSTOMER SIGNATURE

[Handwritten signature]

15.5" PEDESTAL INSTALLATION INSTRUCTIONS

For use only with front load washers and dryers

INSTRUCTIONS D'INSTALLATION DU PIÉDESTAL DE 15,5"

Pour utilisation avec les produits suivants seulement
laveuses et sècheuses à chargement par l'avant

Para una versión de estas instrucciones en español, visite www.whirlpool.com

Table of Contents

PEDESTAL SAFETY	1
INSTALLATION REQUIREMENTS	2
Location Requirements	2
Tools and Parts.....	2
UNPACKING THE PEDESTAL	3
BEFORE INSTALLING THE PEDESTAL.....	3
INSTALLING THE PEDESTAL.....	4
COMPLETE THE INSTALLATION.....	7

Table des matières

SÉCURITÉ DU PIÉDESTAL	1
EXIGENCES D'INSTALLATION	2
Exigences d'emplacement.....	2
Outils et pièces	2
INSTRUCTIONS D'INSTALLATION	3
AVANT L'INSTALLATION DU PIÉDESTAL	3
INSTALLATION DU PIÉDESTAL	4
ACHEVER L'INSTALLATION.....	7

INSTALLATION NOTES

Date of purchase: _____
Date of installation: _____
Installer: _____
Model number: _____
Serial number: _____

NOTES CONCERNANT L'INSTALLATION

Date d'achat : _____
Date d'installation : _____
Installateur : _____
Numéro de modèle : _____
Numéro de série : _____

PEDESTAL SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol.

This symbol alerts you to potential hazards that can kill or hurt you and others.

All safety messages will follow the safety alert symbol and either the word "DANGER" or "WARNING." These words mean:

DANGER

You can be killed or seriously injured if you don't immediately follow instructions.

WARNING

You can be killed or seriously injured if you don't follow instructions.

All safety messages will tell you what the potential hazard is, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

**I HAVE READ AND
FULLY UNDERSTAND
THIS LAYOUT/QUOTATION**

CUSTOMER SIGNATURE

W10347252B
W10348602B - SP