

APPLIANCE SPEC INFORMATION SHEET

STE & LOT: Castles South

DATE: OCT 26/16

SITING: ☐ Standard ☐ Reverse

RANGE

- ☐ 30" (STD)
☒ 36"
☐ 48"
☒ GAS
☒ COOKTOP (APRON)
☐ COOKTOP (DROP IN)

☐ AMPS
☒ AMPS 15 STD

REFRIGERATOR

- ☐ STANDARD OPENING 36" X 72"
☒ BUILT IN FRIDGE
☒ WATERLINE REQUIRED STD

☐ PANELLED/INTEGRATED
☐ FLUSH INSET

WALL OVENS

- ☐ 30"
☒ SINGLE
☐ DOUBLE
☐ STEAM OVEN
☐ WARMING DRAWER

☒ AMPS 30
☐ AMPS
☐ AMPS
☐ AMPS

MICROWAVES

- ☒ BUILT IN MICRO
☐ MICRO TRIM KIT
☐ OVER THE RANGE

☐ AMPS 15
☐ MODEL
☐ AMPS

HOOD FANS

- ☐ CHIMNEY (CENTRE VENT)
☒ UNDER CABINET
☐ FLUSH INSET

☐ 6 INCH (STD)
☐ 8 INCH
☒ 10 INCH

DISHWASHER

- ☒ 24" (STD SIZE)

LAUNDRY

- ☒ FRONT LOADING SIDE BY SIDE
☐ STACKABLE

Additional charges may apply for cabinetry, electrical and plumbing in order to accommodate the specs given by the homeowner.

NOTE: It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specs not received, DUE BY:

Appliance Specs RECEIVED

Purchaser Signature

Date

OCT 26/16

Purchaser Signature

Date

16

36" LOW PROFILE WALL HOOD


PW362210

FEATURES

- Heavy-duty stainless steel construction
- Handfinished with hemmed edges and welded seams
- Bright halogen lighting
- Infinite speed blower control
- Heat sentry for safety
- Recessed controls for sleeker look
- Blower required (internal, in-line or remote blowers available)
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

- 36" high stainless steel backplash with or without warming racks
 - 6", 12", 18", 24" and 30" high stainless steel duct covers
 - Make-up air damper
 - Recirculating kit and filter for non-ducted applications (internal blower)
- Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/local.

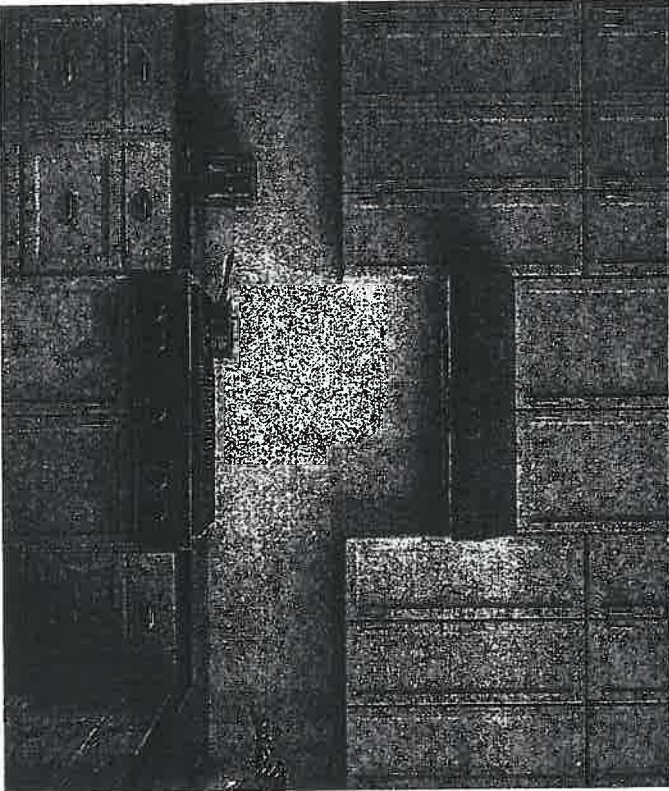

BLOWER OPTIONS

- 600 CFM Inline
- 600 CFM Remote
- 900 CFM Remote
- 500 CFM Internal

375
Carter
for 2/1/16

SC


INITIAL HERE




PRODUCT SPECIFICATIONS

Model	PW362210
Dimensions	36"W x 10"H x 22"D
Weight	44 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	Rectangle 14" x 3 1/4"
Bottom of Hood to Countertop	30" to 36"

ELECTRICAL



DIMENSIONS

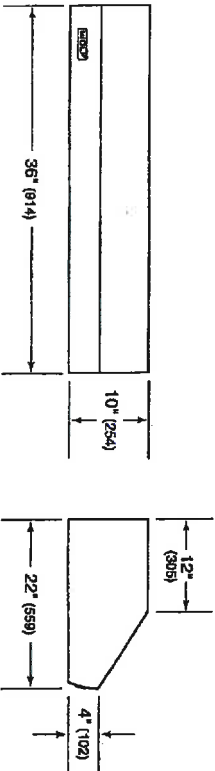

J.C.

INITIAL HERE

375
Castles
Oct 26/10

36" SEALED BURNER RANGETOP - 6 BURNERS



SRT366


FEATURES

- 6 dual-stacked, seamless burners
- Dual-stacked burners go from 20,000 Btu down to a mere breath of flame
- Continuous cast-iron grates for easy movement of pots and pans
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Spark ignition system re-ignites when flame goes out

ACCESSORIES

- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Cast iron S-grates and wok grate
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.

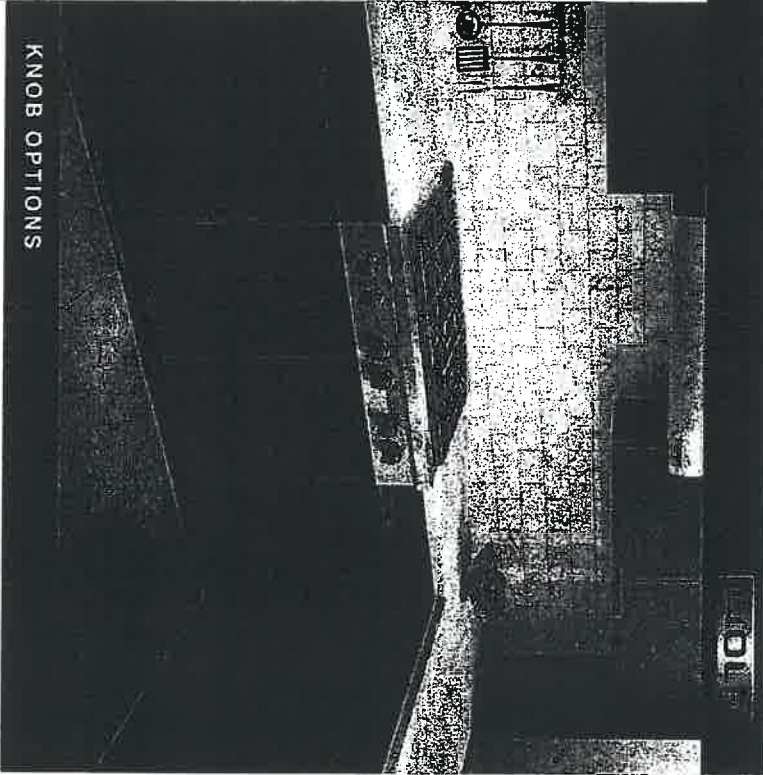

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner

castles
275
per 26116

SG.




36" SEALED BURNER RANGETOP - 6 BURNERS




PRODUCT SPECIFICATIONS

Model	SRT366		
Dimensions	35 7/8"W x 8 1/2"H x 28 1/2"D		
Weight	220 lb		
Electrical Supply	110/120 VAC, 60 Hz		
Electrical Service	15 amp dedicated circuit		
Gas Supply	3/4" rigid pipe		
Gas Inlet	1/2" NPT female		
Receptacle	3-prong grounding-type		


ELECTRICAL AND GAS



DIMENSIONS

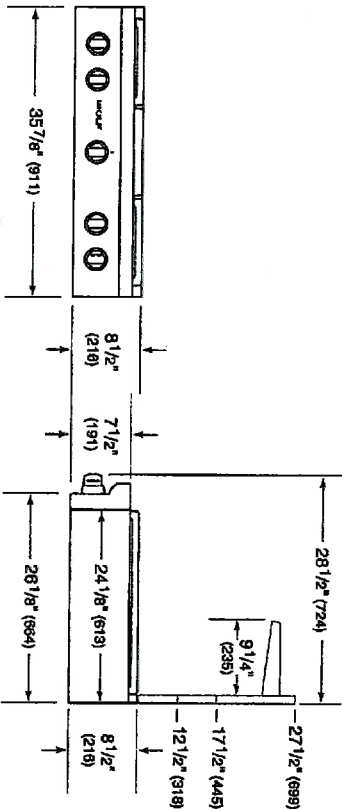

STANDARD INSTALLATION

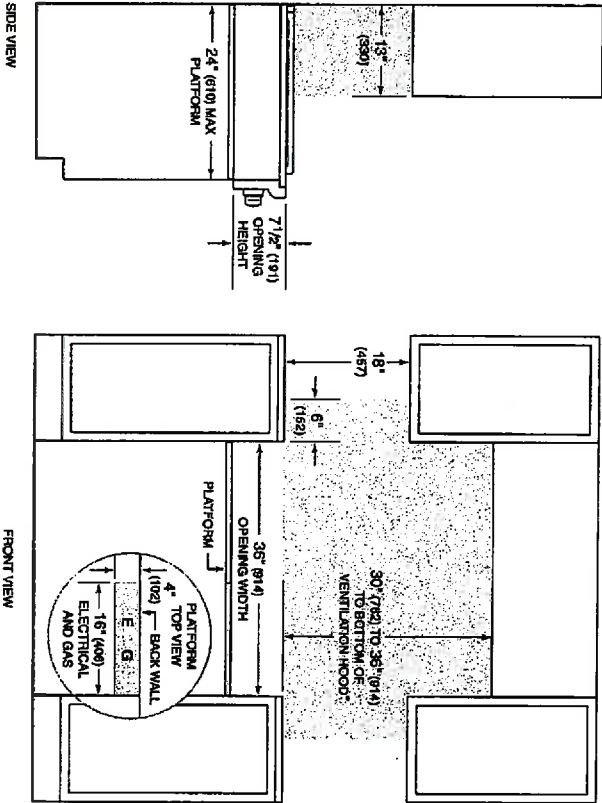

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for dishwasher.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.
combustible materials cannot be located within this area.
Electrical and gas supply located through bottom of platform.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

DU 28/11/14
36" sealed
S.C.

INITIAL HERE

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

HERNIM

B1-36U/S




FEATURES

- LED Lighting for brighter interior
- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Clear-view, triple-pane and UV-resistant glass door
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- Over-and-under refrigerator/freezer storage
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience


ACCESSORIES

- Stainless Steel Side Panel
- White Side Panel
- Air Purification Cartridge
- Egg Container
- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit
- Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/location.

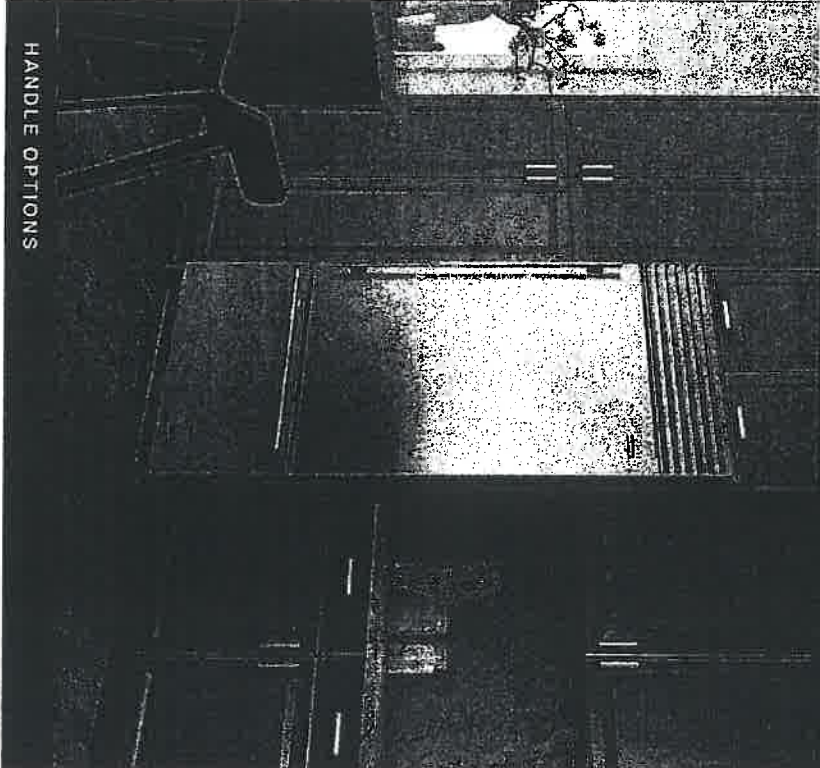

HANDLE OPTIONS

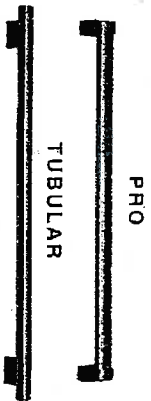

PRODUCT DETAILS

REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves
- 1 Stationary door shelf
- Adjustable dairy compartment

FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker

OC 26/14
275
Casper's SC

INITIAL HERE

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER




PRODUCT SPECIFICATIONS


Model	BI-36/US		
Dimensions	36"W x 84"H x 24"D		
Door Clearance	37 1/4"		
Drawer Clearance	23 5/8"		
Weight	515 lb		
Refrigerator Capacity	16.4 cu ft		
Freezer Capacity	5.3 cu ft		
Electrical Supply	115 VAC, 60 Hz		
Electrical Service	15 amp dedicated circuit		
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing		
Plumbing Pressure	35-120 psi		
Receptacle	3-prong grounding-type		

ELECTRICAL

PLUMBING

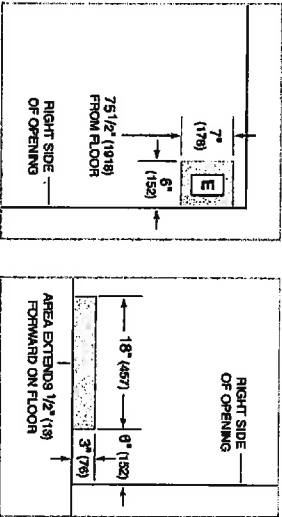


INTERIOR VIEW

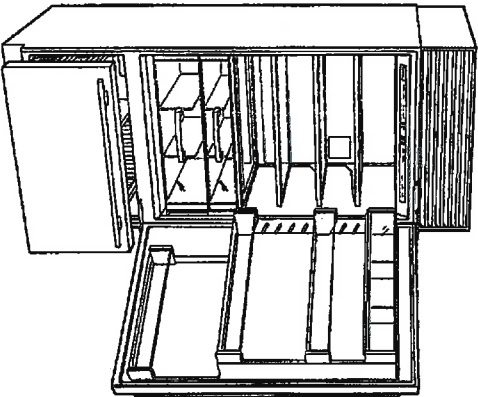


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

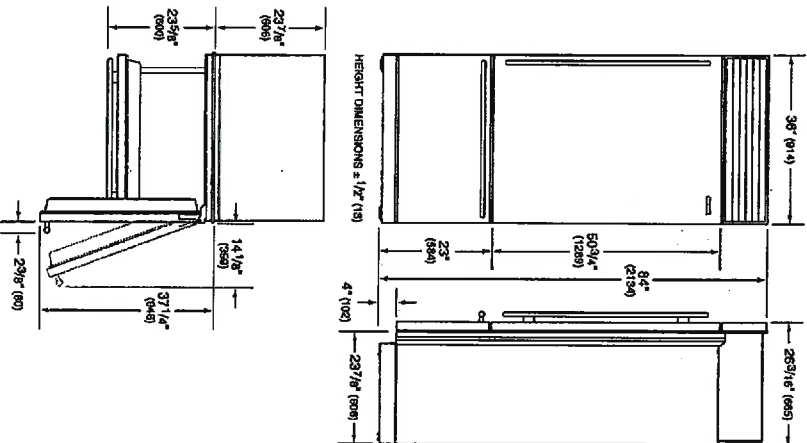

STANDARD INSTALLATION

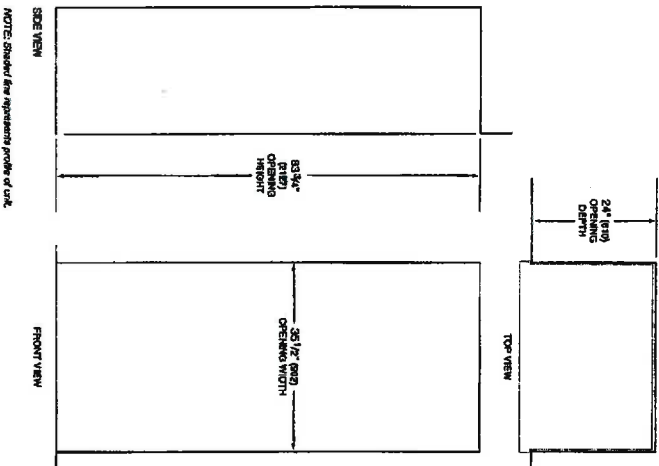

part 375 castles

SL

INITIAL HERE

30" E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN



MDD30TE/S/TH

FEATURES

Integrates into any kitchen

Matches E series ovens, coffee systems, convection steam oven

900 watts of power

Generous 1.6 cu. ft. capacity


Quick-start controls for popular items

Gourmet mode cooks automatically from preset recipes

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

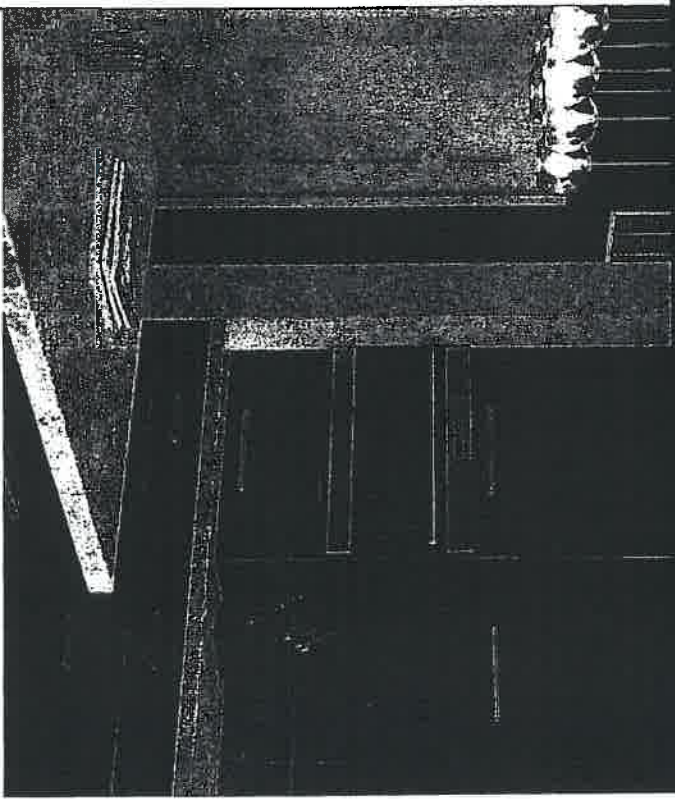

SC

INITIAL HERE


SC
Castles
Oct 26/12




PRODUCT SPECIFICATIONS

Model	MDD30TE/STH		
Dimensions	29 7/8"W x 17 7/8"H x 20"D		
Door Clearance	14 3/16"		
Weight	80 lb		
Electrical Supply	120 VAC, 60 Hz		
Electrical Service	15 amp dedicated circuit		
Overall Capacity	1.6 cu ft		
Power Cord Length	4 feet		


ELECTRICAL



DIMENSIONS

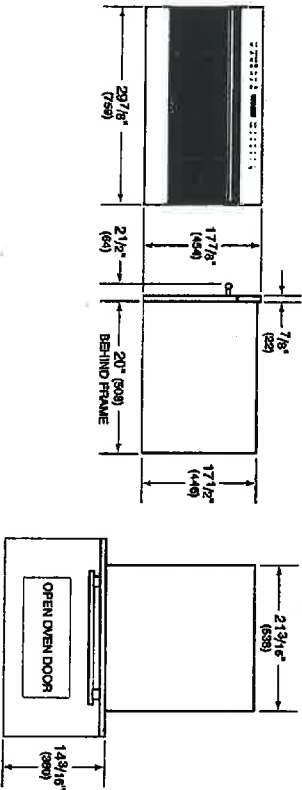

STANDARD INSTALLATION

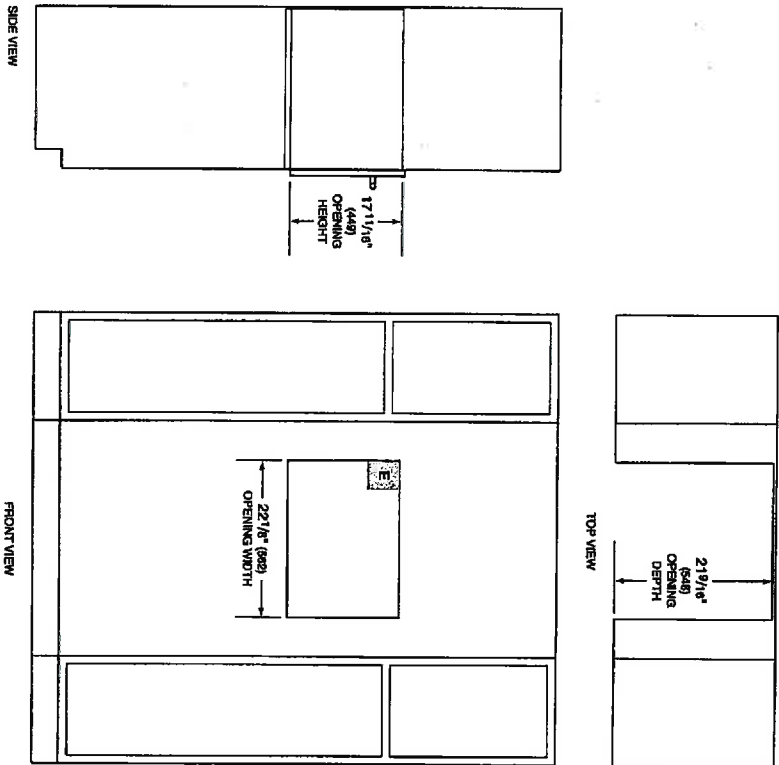

0575
Cabinet
05/26/19
S.C.

INITIAL HERE

30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



SO30TE/S/TH

FEATURES

- 10 cooking modes make meals easy
- Three adjustable oven racks
- Cobalt blue porcelain interior
- Self clean, delayed start, timed cook, Sabbath mode and more
- Installs flush with surrounding cabinetry
- Dual convection oven for faster, more consistent cooking
- Temperature probe lets you know when it's done
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Hidden bake element and recessed broil element

ACCESSORIES

- 30" baking sheet
- Bake stone kit (stone, rack and peel)
- Dehydration kit (racks and door stop)
- Full-extension easy glide oven rack
- Temperature probe and broiler pan
- Set of three standard oven racks

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit SUZZERO-WORLD.COM/locator.



Oct 26/19
CASH SC
2575

INITIAL HERE


30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN




PRODUCT SPECIFICATIONS

Model	SO30TES/TH	
Dimensions	29 7/8"W x 27 7/8"H x 23 3/4"D	
Oven 1 Interior Dimensions	25"W x 16 1/2"H x 19"D	
Overall Capacity	4.5 cu ft	
Usable Capacity	2.8 cu ft	
Door Clearance	22"	
Weight	273 lb	
Electrical Supply	240/208 VAC, 60 Hz	
Electrical Service	30 amp dedicated circuit	
Conduit Length	4 feet	


ELECTRICAL



DIMENSIONS

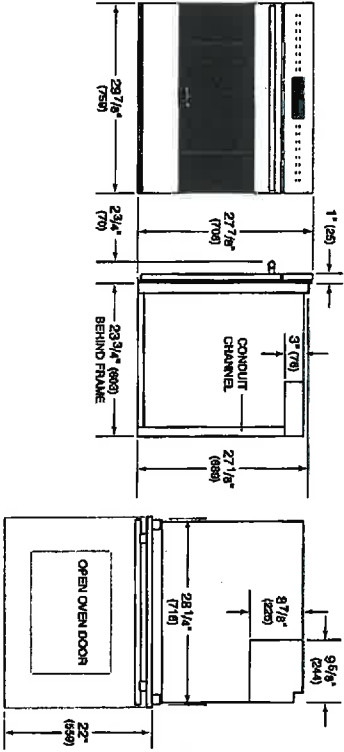

STANDARD INSTALLATION

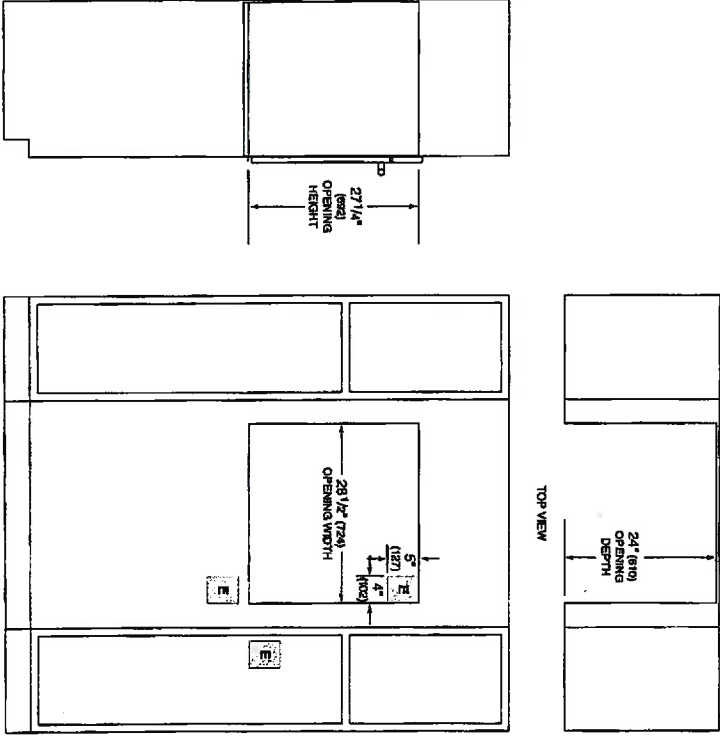

for 26116

375
Caddies

SL

INITIAL HERE

D5434XLS

Turbo Drying

Capacity (max): 14 Place settings
Upper basket type: Premium upper basket
Lower basket type: Exclusive lower basket

Programs

Heavy wash
Normal programme
Quick wash
Eco wash
Rinse and hold
Sanitation wash

Options

Delayed start: 24 h
High temperature
Long dry

Cleaning systems

Number of spray zones: 7
Self cleaning filters
AquaLevel™ Sensor

Drying system

Turbo Drying™

Features

8 stainless steel parts
Fault indication
Salt indication
Rinse-aid indication
Time remaining indicator
Voice signal for the end of washing cycle

Safety


AquaSafe™
SteamSafe™

Baskets

Upper basket type: Premium upper basket
Lower basket type: Exclusive lower basket

Product: Dishwasher

EAN code: 3838942493096

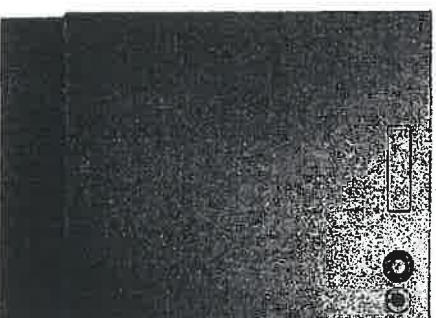

General

Size: XL (ADA height compliant)
Mode of installation: Built-in
Display type: Touch Screen Display
Number of programs: 6
Noise level: 48 dB(A)
Number of baskets: 2
Max loading height upper basket: 9 1/16 (230 mm)
Max loading height lower basket: 12 3/16 (310 mm)
Capacity (max): 14 Place settings

Dimensions and installation

Height: 32 1/4 (819 mm)
Width: 24 (610 mm)
Depth: 22 7/8 (581 mm)
Packaging height: 35 13/16 (910 mm)
Packaging width: 26 3/16 (640 mm)
Packaging depth: 26 3/4 (680 mm)
Length inlet hose: 66 1/8 (1680 mm)
Length outlet hose: 41 3/4 (1080 mm)
Cord length: 48 7/16 (1180 mm)
Weight net: 108 lbs
Weight gross: 112 lbs

Technical information

Connection rating: 1300 W
Current: 15 A
Voltage: 120 V

Consumption

Energy consumption/cycle: 1,07 kWh

ASKO North America, Inc. 18030 Kipling Drive, Madison, WI 53744
For customer support call 1-800-898-1879

BU 2614
375 Castles

INITIAL HERE

D5434XLS

XL DISHWASHERS (ADA COMPLIANT)


UNIT DIMENSIONS

	U.S.	Metric
Height (Adjustable)*	32-1/4" to 34"	819 mm to 864 mm
Width	24"	610 mm
Depth (Includes high loop)	22-7/8"	581 mm
Depth w/Handle	24-7/8"	632 mm
Depth w/Door Open	48-3/8"	1228 mm
Weight	108 lb	49 kg

* 32-1/4" (819 mm) height requires removal of top trim, and lowering side trim (2).

TECHNICAL DATA

Electricity	120V, 60-Hz, 15 amp
Water pressure	4.2 - 140 psi, 0.03-1.0 MPa, 0.3-10 Bar
Heating element	1200 watt
Max loading	1300 watt

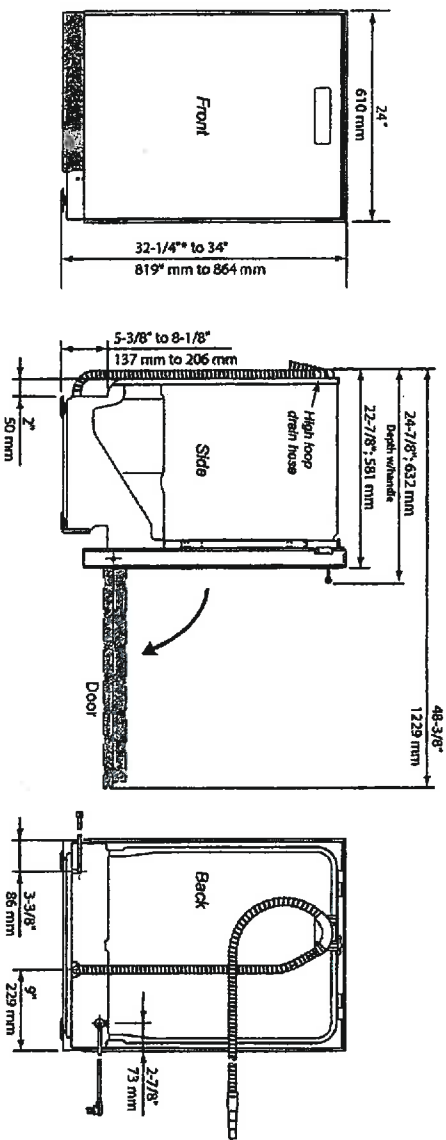

PREPARING THE LOCATION


CUTOUT DIMENSIONS

	U.S.	Metric
Height*	32-1/4" to 34"	819 to 864 mm
Width	24"	610 mm
Depth	24"	610 mm

The best place for your dishwasher is in the kitchen near the sink. This makes it easier to connect the water and drain supply lines. A built-in dishwasher must be enclosed on the top, both sides and the back.

The power-supply receptacle for the appliance shall be installed in a cabinet or on a wall adjacent to the undercounter space in which the appliance is to be installed.

The electrical and water supplies should enter through the area indicated by the shading on the illustration at right. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 1-1/2" (38 mm) in diameter. If the partition is metal, it needs to be covered with an edge protector. Use caution when the appliance is installed or removed, to reduce the likelihood of damage to the power-supply cord.

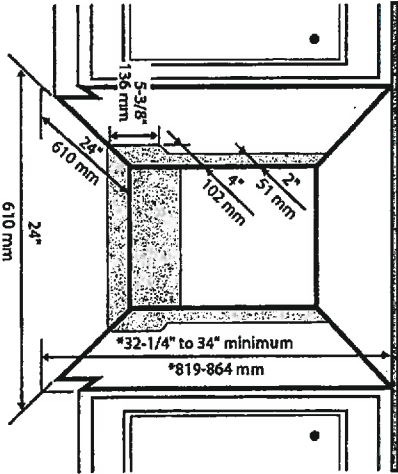

* 32-1/4" (819 mm) height requires removal of top trim, and lowering side trim (2).

ASKO Appliances, North America, Inc. • P.O. Box 24448 • Madison, WI 53724
• (608) 261-5000 • FAX: (608) 261-5001 • TOLL FREE: (800) 898-1979

INITIAL HERE

PCA 26114
JTB
Castles




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW7590F, WFW75HEF, WFW90HEF,
WFW92HEF

Washer Dimensions:

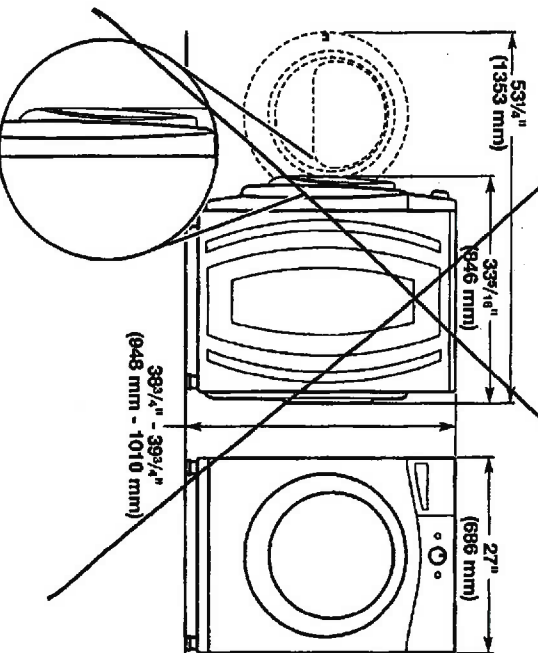

Recessed or closet installation -
stacked washer and dryer

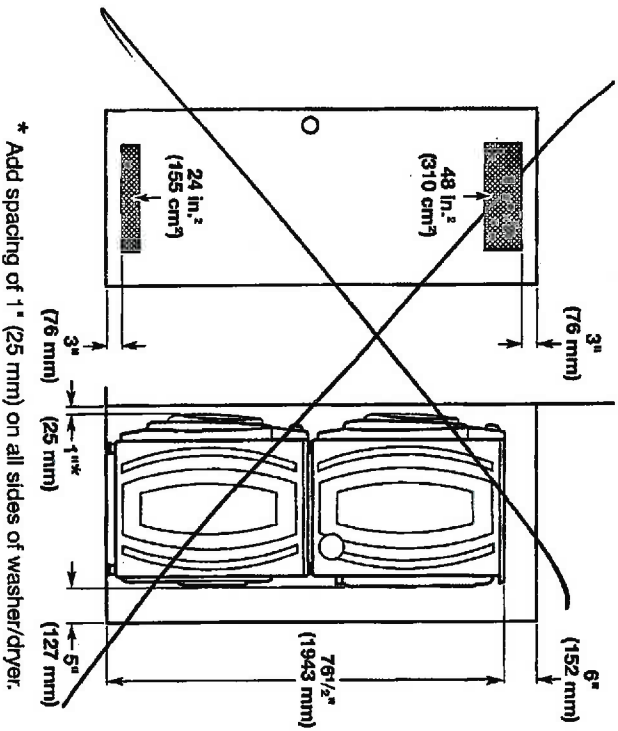


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F, WFW85HEF

Washer Dimensions:

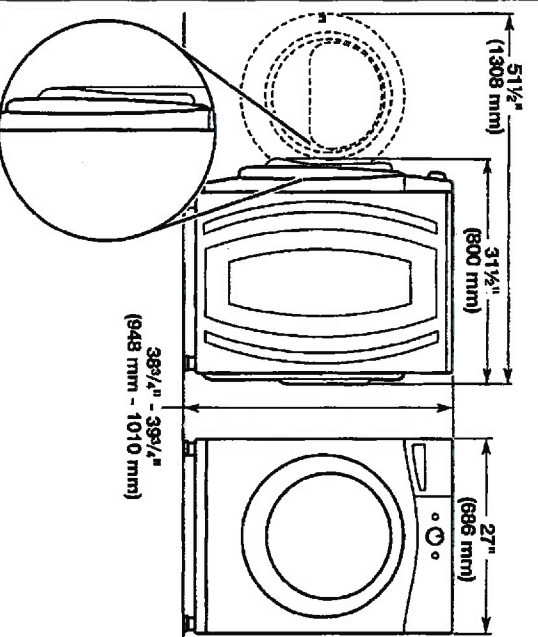

Recessed area or closet installation (washer only):

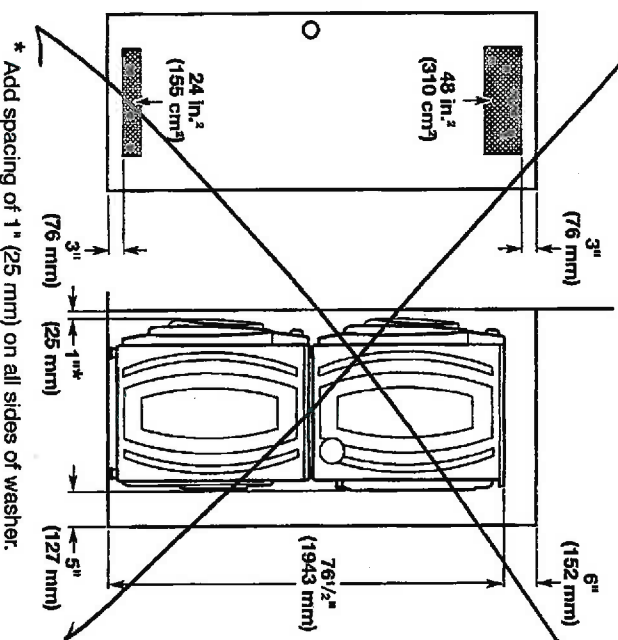


* Add spacing of 1" (25 mm) on all sides of washer.

275
Cassidy J. S.
Oct 11/16


INITIAL HERE

Custom cabinet installation (washer only):

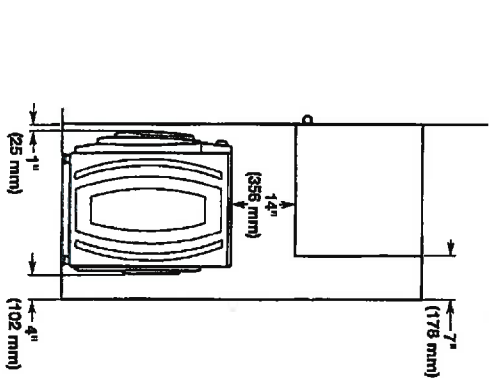

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

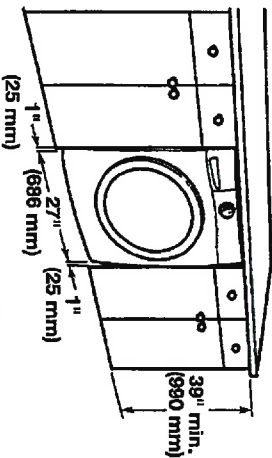

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

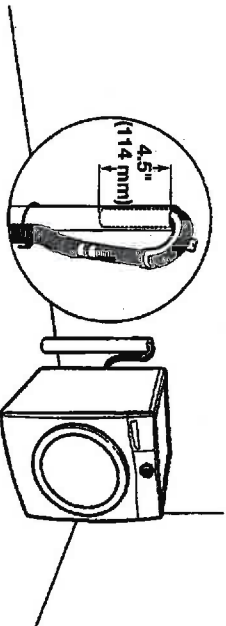


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

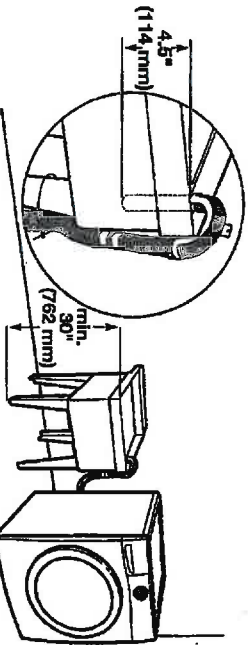


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

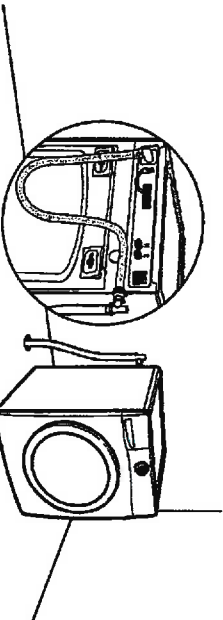

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Wall standpipe drain system

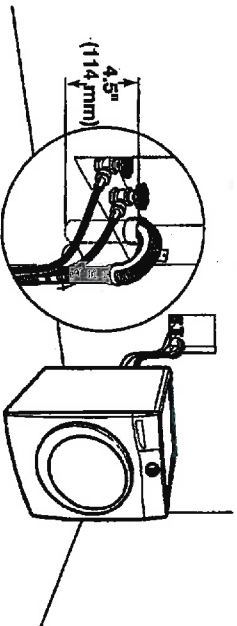

See requirements for floor standpipe drain system.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

04/26/16
PJS
castles
SC

INITIAL HERE




ELECTRIC DRYER


PRODUCT MODEL NUMBERS

WED7605F, WED7540F, WED7530F, WED75HEF,
WED740F, WED77HEF, WED90HEF, WED92HEF, WED85HEF


Front view

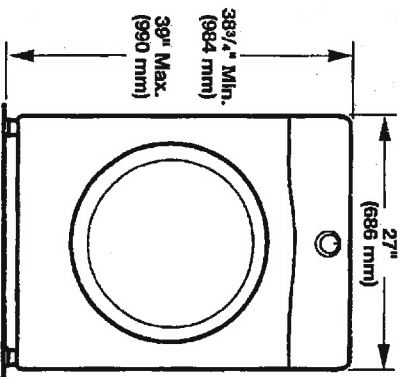

Side view

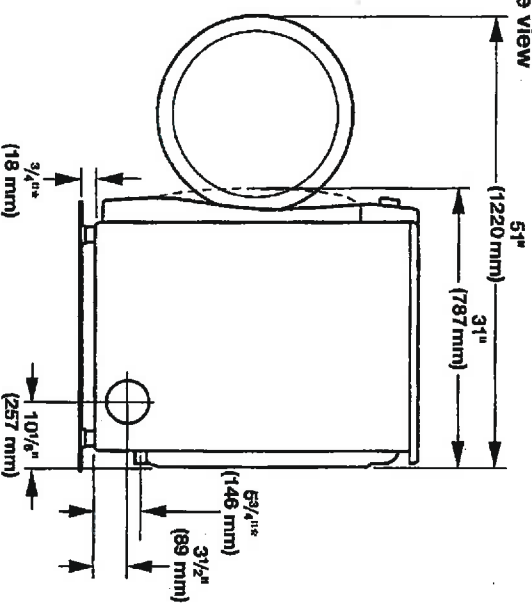


Back view

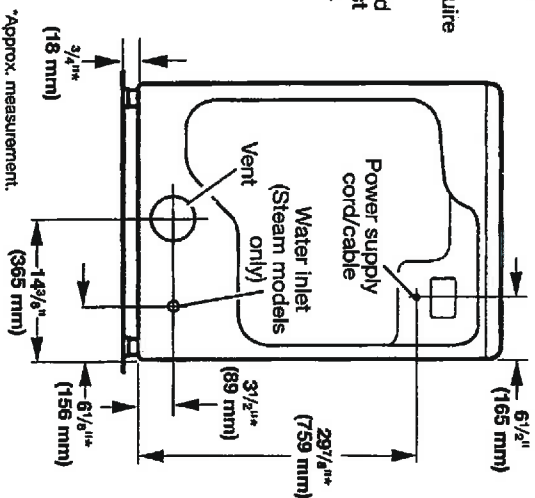

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Recommended installation clearances

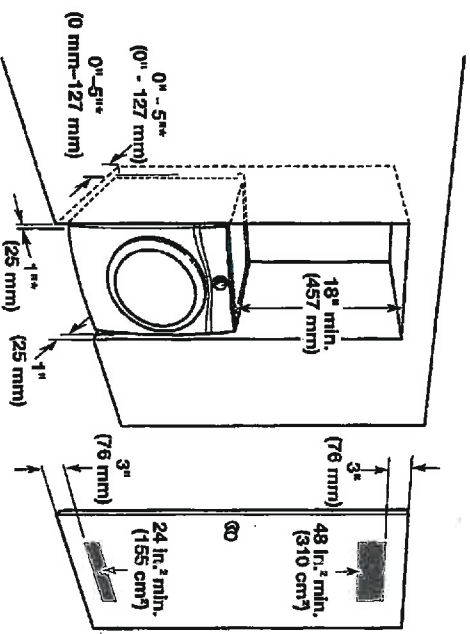

*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

W10775223A
06/2016

INITIAL HERE

BU 26/18
258 Carter St.

INSTALLATION REQUIREMENTS

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.

WATER (STEAM MODELS ONLY) REQUIREMENTS


The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses. Do not overtighten. Damage to the coupling can result.

VENTING REQUIREMENTS


Exhaust venting: Exhaust your dryer to the outside, 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Exhaust hoods:

Recommended styles:




Louvered Hood



Box Hood

Acceptable style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.
- NOTE:** Do not use vent runs longer than those specified in "Vent System Charts."
- Shorten life of dryer.
 - Reduce performance, resulting in longer drying times and increased energy usage.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


275 Castle 26116
PCA SC.

INITIAL HERE


24" Marvel High-Efficiency Dual Zone Wine Cellar

Model # ML24WD****

- Our wine storage solution provides two separate and independently controlled temperature compartments for red and white wine. Store and serve reds in the top between 55°F and 62°F and whites in the bottom between 45° and 55° degrees
- Dynamic Cooling Technology™ delivers rapid cooldown and the industry's best temperature stability
- MARVEL Intuit™ Integrated Controls provide precise temperature management from 45°F to 62°F, allowing you to specifically set cabinet temperature to your preference
- Two-stage, soft white theatre-style LED lighting and midnight black interior
- Vibration Neutralization System™ protects wine from agitation
- Three-quarter extension roller-glide shelf system prevents jarring
- Thermal-efficient cabinet ensures optimum wine preservation and energy efficiency while maximizing capacity
- Tinted, UV-resistant dual pane glass door protects wine from damaging ultra-violet light
- Natural maple shelf fronts are stainable to match cabinetry
- Close Door Assist System™ gently and automatically closes door
- Panel overlay option features soft-close integrated hinge for a truly flush fit with cabinetry
- Sleek stainless steel door, designer handle and 4" adjustable black toe grill
- Audible and visual alarms signal when door is left ajar to protect wine integrity and energy use
- Vacation/Sabbath mode conserves energy during times when the unit is not in use and complies with Star-K requirements
- Height adjustment up to 1" with leveling legs
- Up to 2x more efficient than leading competitors
- 1-year warranty

	
Stainless Frame Glass Door, Right Hinge	ML24WDG2RS
Stainless Frame Glass Door, Left Hinge	ML24WBG2LS
Smooth Black Frame Glass Door, Right Hinge	ML24WBG2RB
Smooth Black Frame Glass Door, Left Hinge	ML24WBG2LB
Panel Overlay Frame Glass Door, Integrated Right Hinge	ML24WDF3RP
Panel Overlay Frame Glass Door, Integrated Left Hinge	ML24WDF3LP

No panel installation kit required.

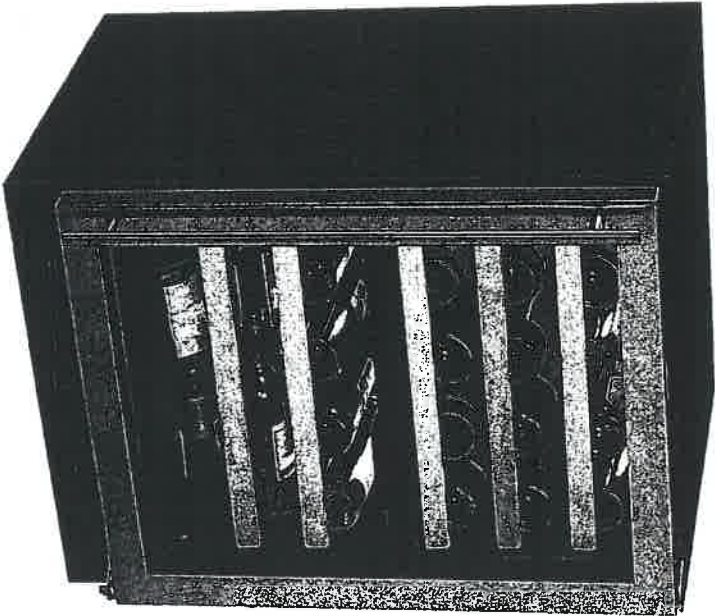

Storage Capacity

Up to 40 bottles total

Storage Configuration

Upper zone: (3) 8-bottle roller-glide wine racks

Lower zone: (1) 8-bottle roller-glide wine rack and (2)

4-bottle half depth roller-glide wine racks

Product Dimensions


23¾" W x 33¾" minimum H x 25¾" D (including handle)

Finish/Door Options


		
Stainless Steel	Black	Wood Overlay (Panel Ready)

6x 126 1/4 castles & 278


INITIAL HERE

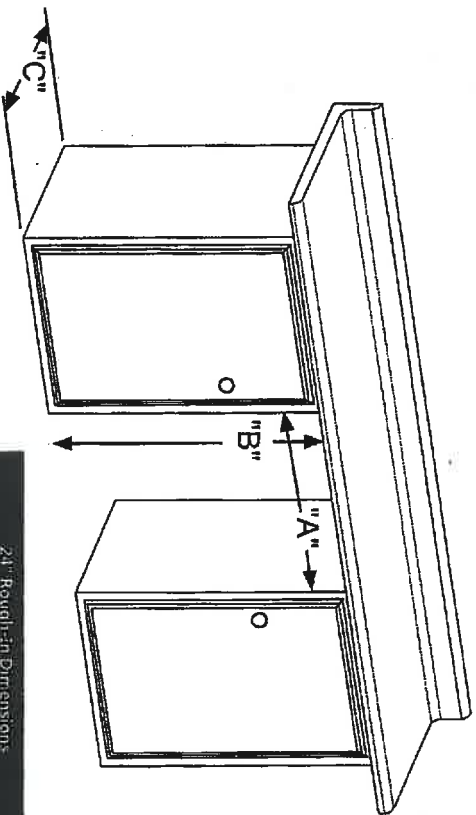

24" Rough-in Dimensions		
24"	34" to 35"	24"
(61 cm)	(86.4 to 88.9 cm)	(61 cm)

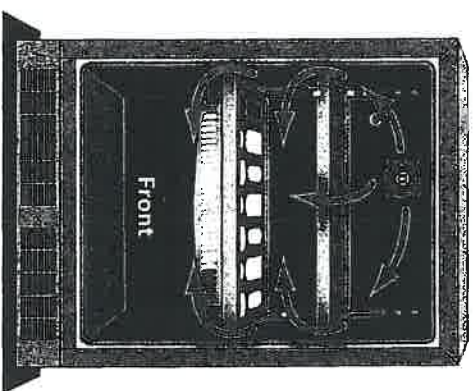


Cabinet Dimensions		
23 7/8"	33 3/4" to 34 3/4"	23 23/32"
(60.7 cm)	(85.7 to 88.3 cm)	(60.2 cm)
25 21/32"	46 13/32"	25 11/16"
(65.2 cm)	(117.9 cm)	(65.2 cm)

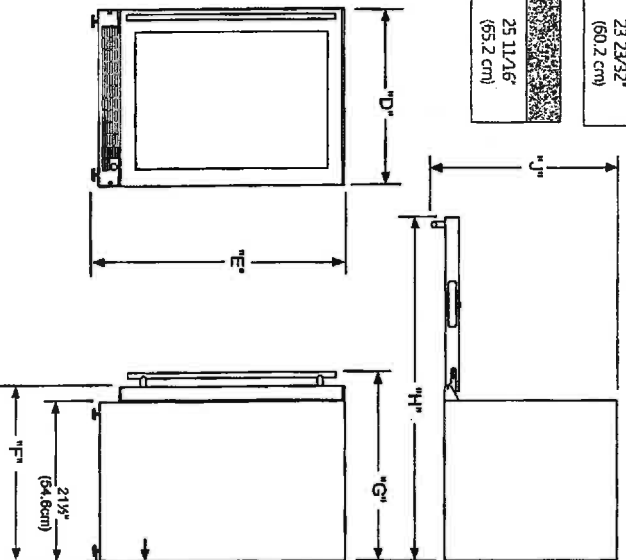

Width	23 3/4"
Interior Finish	Black
Capacity	Up to 40 wine bottles 24 Upper zone 16 Lower zone
Shelving System	Slide mount - tray
Shelf Fronts	Black painted maple
Other Storage	NA
Interior Lighting	2 White LED Pods
Toe Grill Finish	Black
Hinge	Classic Hinge
Handle	Designer

Control Type	Intui™
Temperature Range	45° - 62° F
Lock	NA
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	5'
Product Dimensions	23 3/4" W x 33 3/4" H x 21 1/2" D
Depth to Front of Door	23 3/4"
Depth to Handle	25 3/4"
Depth with door at 90°	46 3/4"
Shipping Weight	160 lbs

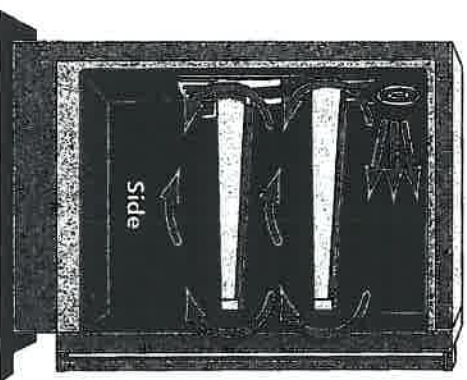

Dynamic Cooling Technology™
delivers rapid cool down
and the industry's best
temperature stability

The distinctive Marvel design features a thermal-efficient cabinet and door combined with Dynamic Cooling Technology™ for superior temperature stability, faster cooling times and speedy temperature recovery even with high frequency.

Finishes	SS, B, O
Vacation / Sabbath Mode	Yes
Agency Approvals	CSA
ENERGY STAR Certified	NA

Finishes Key

SS = Stainless Steel
 B = Black
 W = White
 O = Overlay

27 Styles
 23 Colors
 16 Options

INITIAL HERE