

WRX988SIBM



<http://www.whirlpool.com>

## 36-inch Wide 4-Door Refrigerator with More Flexible Storage - 26 cu. ft.



### Key Features:

- Flexible Storage
- FreshStor™ Refrigerated Drawer
- EasyView™ Triple Crisper System
- Tri-Freezer System
- EasySlide Bin
- In-Door-Ice® System
- AccuFresh™ Dual Cooling System
- MicroEdge® Shelves
- Fold-Away Shelf
- Pizza Pocket
- Freezer Divider
- Measured Fill

### Product Dimensions:

Height: 70 1/8

Width: 35 11/16

Depth: 35 11/16

### Electrical Requirements:

15.

### Additional Information:

[Use And Care Guide](#)

[Dimension Guide](#)

[Installation Guide](#)

[Energy Guide](#)

[Warranty Certificate](#)

### Available in:

- Black Ice
- White Ice
- Monochromatic Stainless Steel



ANGUS SOUTH  
LOT 6.

®Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2013 Whirlpool Corporation. All Rights Reserved.  
All other trademarks are owned by their respective companies.  
Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.  
Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.  
Created On: Monday, March 14, 2016 12:47:46



## Bottom Mount Refrigerator



### PRODUCT MODEL NUMBERS

WRX988SIB

**Electrical:** A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

### PRODUCT DIMENSIONS

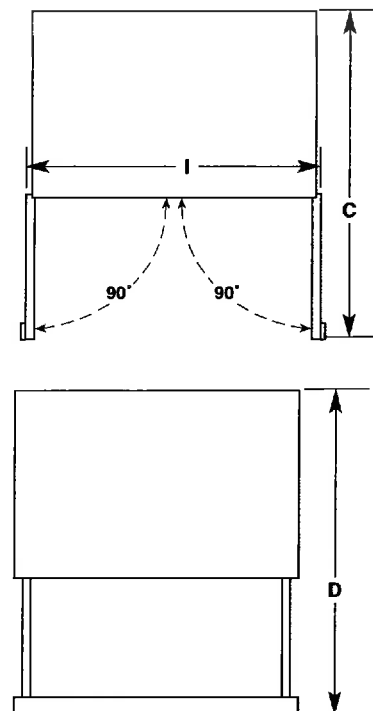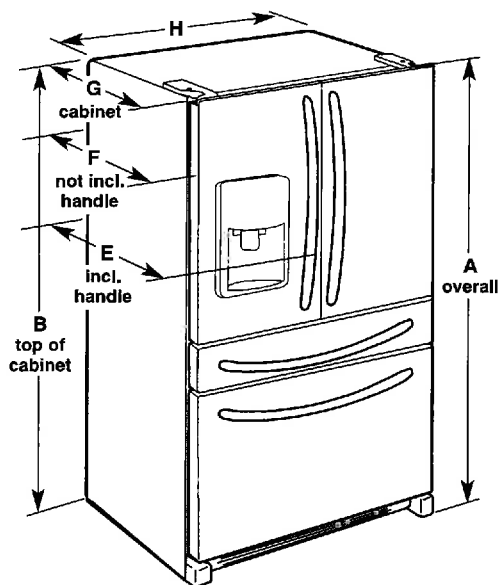

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
26.2 cu.ft.	70 $\frac{1}{4}$ " (178.1 cm)	68 $\frac{3}{4}$ " (174.3 cm)	48" (121.9 cm)	47 $\frac{1}{8}$ " (121 cm)	35 $\frac{1}{16}$ " (90.6 cm)	33 $\frac{3}{16}$ " (84.3 cm)	28 $\frac{1}{16}$ " (73.5 cm)	35 $\frac{1}{16}$ " (90.6 cm)	38 $\frac{3}{16}$ " (97.0 cm)

### LOCATION REQUIREMENTS

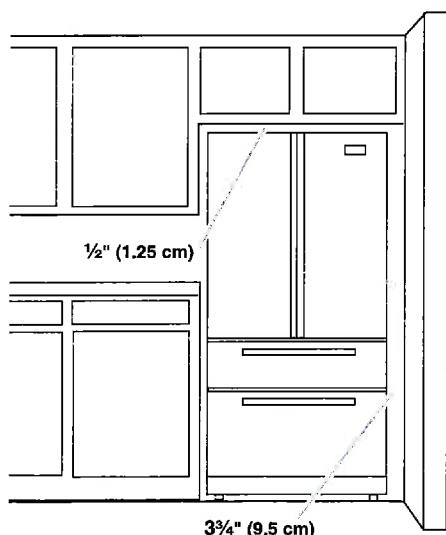

To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave  $\frac{3}{4}$ " (9.5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).

ANGUS SOUTH  
LOT 6

# NE58H9970WS

5.8 CU. FT. FLEX DUO™ SLIDE-IN INDUCTION RANGE



## CHEF COLLECTION

Our premium Chef Collection line is designed by Master Chefs with the sophisticated cook in mind. Every appliance in the collection has been tested and approved by Michelin Star chefs to build the best kitchen possible.

### FEATURES

- Premium Slide-in Design
- Flex Duo™ Technology -- traditional single cavity range and double oven in one; unique design easily switches from single cavity to two smaller cavities
- Chef Bake -- Precise Temperature Control for Optimal Results
- Four Induction Elements -- 11", 7", two 6"
- Glass Touch Controls with Guiding Light System
- Dual Convection for Even Cooking
- Gliding Rack for Simplest Access to Food in the Oven
- Temperature Probe Ensures Best Cooking Results
- Large Oven Capacity--5.8 cu. ft.
- Warming Drawer: High, Medium, Low
- SteamQuick™ (20 min. oven cleaning) and Self Clean

### CONVENIENCE

- Hot Surface Indicator Lights
- Auto Oven Light
- Proofing
- Sabbath Mode
- Kitchen Timer
- Delay Start
- Auto Shut-Off Option
- Child Safety Lock
- 5 Healthy Cook Presets



Full Induction Cooktop with Virtual Flame Technology



Guiding Light Controls

### Available Color



Stainless Steel

ANGUS SOUTH  
LOT 6.

### SIGNATURE FEATURES

#### FULL INDUCTION COOKTOP WITH VIRTUAL FLAME TECHNOLOGY

- Induction cooking focuses the most heat directly to the pot so that you can boil and cook faster, plus simmer with more control. Induction cooking uses heat more efficiently as compared to electric and gas.
- LED lights shine onto pots and pans to provide the visual of gas cooking with the precision of induction.

#### FLEX DUO™ OVEN

- 5.8 cu. ft. oven splits into two ovens (2.6 cu. ft. and 3.1 cu. ft.) with the Smart Divider.
- Two temperature controls cook dishes at different temperatures.
- No noticeable transfer of aroma.

#### CHEF BAKE

- Chef Bake delivers consistent cooking temperature with minimum fluctuation.
- Typical ovens experience up to 25 degrees of temperature change during cook time while Chef Bake never fluctuates more than 8 degrees Fahrenheit.

#### PREMIUM DESIGN WITH GUIDING LIGHT CONTROLS

- Intuitive controls offer simple, step-by-step instructions for choosing cooking options.
- Only illuminates cooking options that are able to be selected and goes from left to right eliminating back and forth.
- Control temperature and time settings, select cooking functions and program your favorite recipes.

#### GLIDING RACK

- Glides heavy items in and out with ease.
- Easily check on food with lightweight sliding action with the ball-bearing gliding rack.

SAMSUNG

# NE58H9970WS

5.8 CU. FT. FLEXDUO™ SLIDE-IN INDUCTION RANGE


RECEIVED

AUG 10 2017

## INSTALLING YOUR RANGE



30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

\*\* 18" minimum between the countertop and the adjacent cabinet bottom.

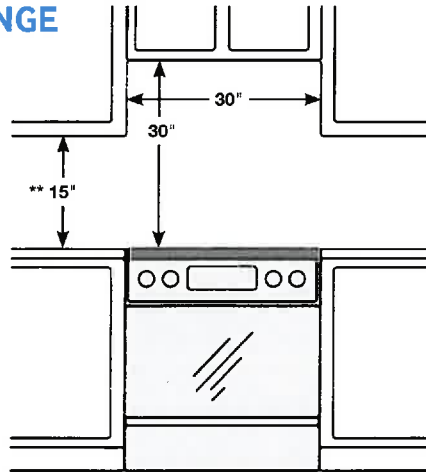


**IMPORTANT:** To eliminate the risk of burns or fire caused by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" beyond the bottom of the cabinets.

## DIMENSIONS

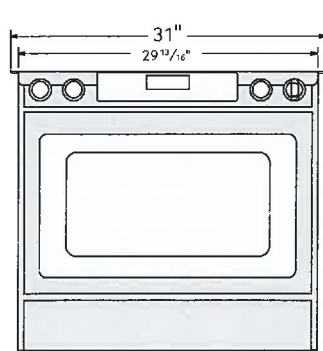

Glass cooktop overlaps and sits on top of your kitchen countertop to give a built-in look. Cut out space for the range is 29 13/16".

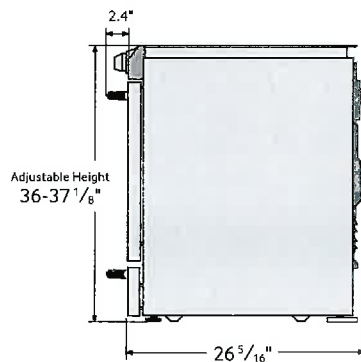

### Induction Cooktop

- Right Front: 7", 1.8 KW (Boost 1.8KW)
- Left Front: 11", 2.3 KW (Boost 3.3KW)
- Right Rear: 6", 1.2 KW (Boost 2.0 KW)
- Left Rear: 7", 1.8 KW (Boost 1.8KW)

### Dual Oven (with Divider)

- Hidden Bake Element: 3000 W
- Bake: 150°F - 550°F
- Convection Bake: 175°F - 550°F
- Convection Roast: 175°F - 550°F
- Variable Broil (Low - High)
- Convection Element/Heater: 1250 W
- Proofing
- Sabbath Mode

### Warming Drawer

- Capacity - 0.7 cu. ft.
- Heating Performance: 600 W (4 pass)
- Temperature Settings: High, Medium, Low

### Warranty

One (1) Year All Parts and Labor  
Five (5) Years Electric Cooktop

### Product Dimensions & Weight (WxHxD)

Outside Dimensions:  
29 13/16" x 36-37 1/8" (Adjustable) x 26 5/16"

Weight: 231.5 lbs.

### Shipping Dimensions & Weight (WxHxD)

Dimensions:  
33 1/32" x 41 3/4" x 30 9/32"

Weight: 255.7 lbs.

Color	Model #	UPC Code
Stainless Steel	NE58H9970WS	887276033013

ANGUS GOWTH  
WTF

WDT780SAEM

## Dishwasher with Stainless Steel Tub



<http://www.whirlpool.com>



### Key Features:

- Sensor Cycle
- In-door Silverware Basket
- Adjustable Upper Rack
- 1-Hour Wash Cycle
- No One Has Fewer Repairs 19 Years in a Row
- ENERGY STAR® Qualified
- Sani Rinse Option
- Stainless Steel Tub
- Cycle Complete Indicator Light
- Cycle Status Indicator
- Remembers Your Last Cycle
- Normal Cycle

### Product Dimensions:

Height: 34 1/2

Width: 24

### Electrical Requirements:

15.

### Additional Information:

[Use And Care Guide](#)

[Dimension Guide](#)

[Installation Guide](#)

[Energy Guide](#)

[Warranty Certificate](#)

Available in:

● Monochromatic  
Stainless Steel



ANGUS SOUTH  
LOT 6



©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2013 Whirlpool Corporation. All Rights Reserved.  
All other trademarks are owned by their respective companies.  
Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.  
Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.  
Created On: Friday, March 11, 2016 11:57:21





## Undercounter Dishwasher

### PRODUCT MODEL NUMBERS

WDF560SAF  
WDF760SAD  
WDF770SAF  
WDT750SAH  
WDT755SAH  
WDT780SAE  
WDT920SAD


WDT970SAH  
WDT975SAH  
WDT995SAF  
WDTA50SAH  
WDTA55SAH  
WDTA75SAH

### DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher.

**NOTE:** Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

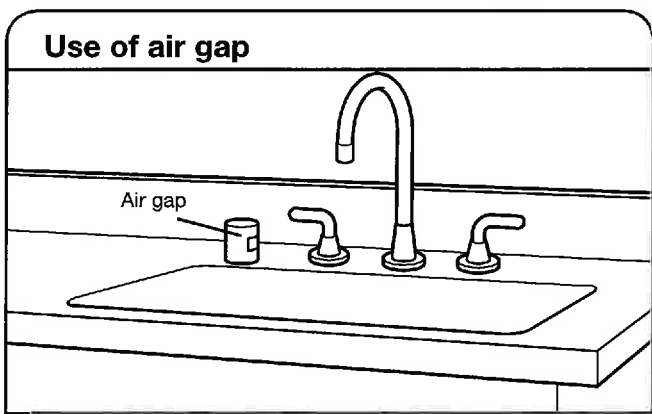

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.



### WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

**NOTE:** 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" hose connection with rubber washer.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

### ELECTRICAL REQUIREMENTS

- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

#### We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

#### If Connecting Dishwasher with a Power Cord:

- Use UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



#### If Connecting Dishwasher with Direct Wiring:


- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief. See the "Tools and Parts" section at the front of the guide for part details and orders.



[illegible]

- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (610 mm), not including the 3/4" (19 mm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher, varies by model.

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

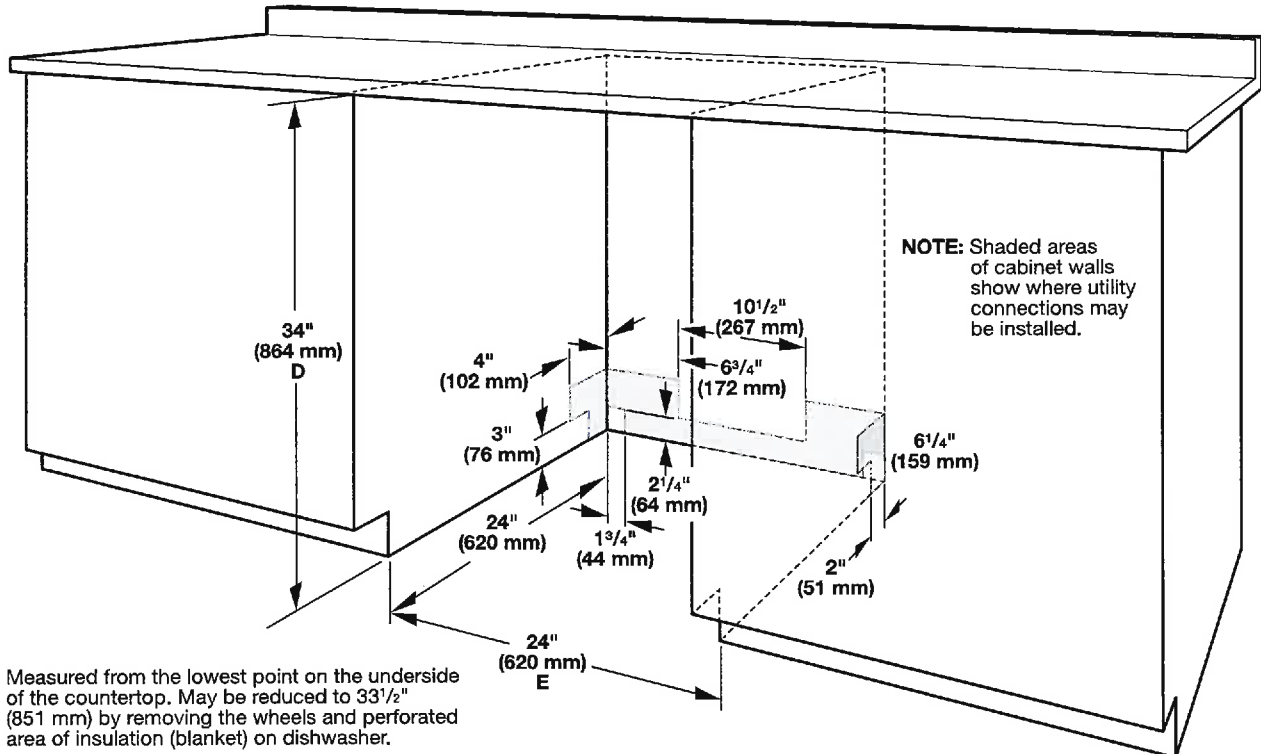

**NOTE:** Shaded areas of cabinet walls show where utility connections may be installed.

- D. Measured from the lowest point on the underside of the countertop. May be reduced to 33 $\frac{1}{2}$ " (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.
- E. Minimum, measured from narrowest point of opening

ANHUS GOTH WTB.

# WF45K6500AV

Samsung Front-Load Washer

RECEIVED

AUG 10 2017

ANTHUS SOUTH  
LOT 6.

## 4.5 cu. ft. Capacity

### Features

- AddWash
- Super Speed
- Steam Wash
- VRT Plus™
- Self Clean+
- Smart Home Ready
- Diamond Drum Design
- Direct Drive Motor
- 1300 RPM Maximum Spin Speed
- 14 Preset Wash Cycles
- 12 Options

### Convenience

- Child Lock
- Door Lock
- Dispenser Trays: Prewash, Main Wash, Softener, Bleach



ENERGY STAR®-rated:

CEE Tier 2

IMEF=2.8

IWF=3.0

100 kWh/yr



AddWash



Super Speed

### Available Colors:



Black Stainless Steel



White

## Signature Features

### AddWash

- Conveniently add in forgotten laundry after the cycle has begun with the AddWash door.
- Save time and energy by not doing an additional load of laundry.

### SUPER SPEED

- Breakthrough technology provides a 40% faster and thorough wash cycle.
- Wash a full load in only 36 minutes.<sup>1</sup>

<sup>1</sup> Normal 1-hour wash can be completed in as little as 36 minutes as compared to WF5511 washer without Super Speed. Based on DOL standard's average of 7.5 loads per week.

### 4.5 CU. FT. CAPACITY

- Large capacity 27" washer lets you wash up to 3 laundry baskets in a single load.<sup>2</sup>
- Fit more laundry – so you can do fewer loads.

<sup>2</sup> Based on an 8-lb. load of laundry.

SAMSUNG



# WF45K6500AV

Samsung Front-Load Washer


RECEIVED

AUG 10 2017

ANKUS GOUTH  
LOT 6

## Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


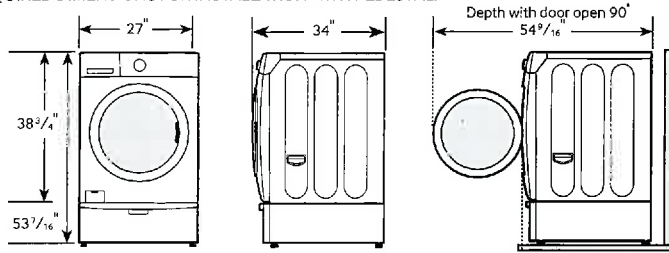


## Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


### 1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

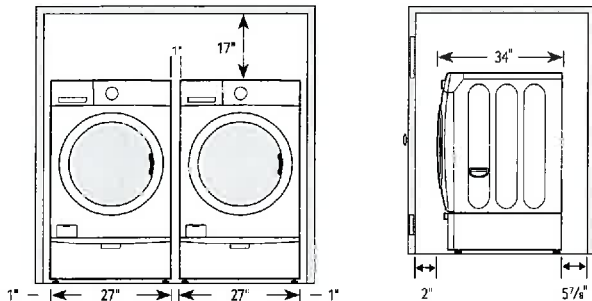

When installing with matching dryer, if the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

### 2. With stacked washer and dryer

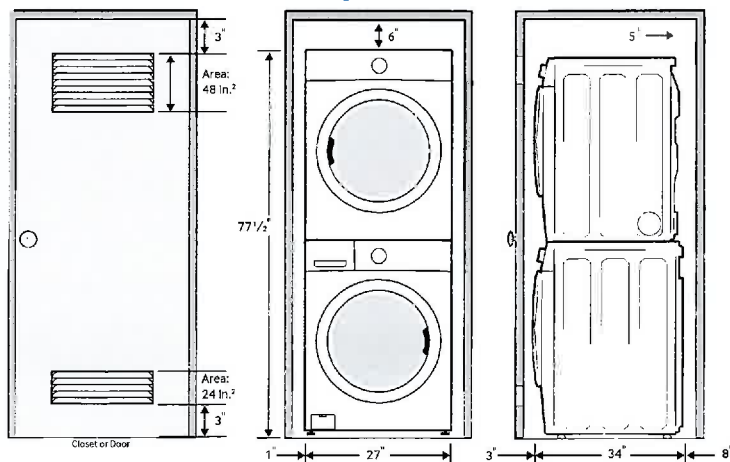

## 4.5 cu. ft. Capacity

### 14 Preset Wash Cycles:

Normal, Heavy Duty, Permanent Press, Sanitize, Allergen, Towels, Bedding, Deep Steam, Whites, Active Wear, Delicates, Wool, Quick Wash, Rinse and Spin

### 12 Options:

Super Speed, Steam, Self Clean+, Delay End, My Cycle, Prewash, Extra Rinse, Extra Spin, Spin Only, Sound, Child Lock, Smart Care

### 5 Temperature Settings:

Extra Hot, Hot, Warm, Eco Warm, Cold

### 5 Spin Settings:

Extra High, High, Medium, Low, No Spin

### 5 Soil Settings:

Heavy, Heavy Medium, Normal, Low Medium, Light

### Dispenser Trays:

Prewash, Main Wash, Softener, Bleach

### Warranty

One (1) Year Parts and Labor

One (1) Year Control Board

Three (3) Years Stainless Steel Drum

Ten (10) Years Direct Drive Motor

### Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 34"

Weight: 227 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 41 3/4" x 35 1/4"

Weight: 233 lbs

### Color

Black Stainless Steel

White

### Model #

WF45K6500AV

WF45K6500AW

### UPC Code

887276138121

887276138138

### Matching Dryer (Electric/Gas)

Black Stainless Steel

White

Black Stainless Steel

White

DV45K6500EV

DV45K6500EW

DV45K6500GV

DV45K6500GW

887276138381

887276138404

887276138411

887276138428

### Optional Stacking Kit

Sold separately

SKK-7A

887276146423

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

# DV45K6500EV

Samsung Front-Load Electric Dryer



ANGUS SOUTH  
LOT 6

## 7.5 cu. ft. Capacity

### Features

- ENERGY STAR® 2016 Certified
- Multi-Steam Technology:
  - Steam Refresh
  - Steam Wrinkle Away
  - Steam Sanitize
- Vent Sensor™
- Stainless Steel Drum
- Eco Dry Technology
- Smart Home Ready
- Smart Care
- Sensor Dry
- 14 Preset Drying Cycles
- 11 Options
- 5 Temperature Settings
- 4-Way Venting
- Dual Heaters
- Dryer Drum Light
- Reversible See-Through Door

### Convenience

- Child Lock
- My Cycle Option
- Filter Check Indicator



Multi-Steam Technology



Vent Sensor

### Available Colors:



Black Stainless Steel



White

### Signature Features

#### ENERGY STAR® 2016 CERTIFIED

- Meets strict energy-consumption requirements.

#### MULTI-STEAM TECHNOLOGY

- Helps remove wrinkles and odors, and freshens clothes so you can spend less time ironing and less money at the dry cleaners.

#### VENT SENSOR™

- Detects duct blockages and reminds you to clean your vent.
- Conveniently allows you to forward these alerts to your smartphone.

**SAMSUNG**

# DV45K6500EV

Samsung Front-Load Electric Dryer


RECEIVED

AUG 10 2017

ANTHONY GOUTH  
LOT 6

## Dimensions

REQUIRED DIMENSIONS FOR INSTALLATION WITH PEDESTAL:


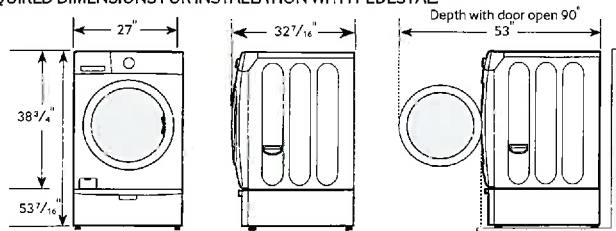


## Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72 in.<sup>2</sup> (see stacked build below). Your washer alone does not require a specific air opening.


### 1. Alcove or closet installation

MINIMUM CLEARANCES FOR CLOSET AND ALCOVE INSTALLATIONS:

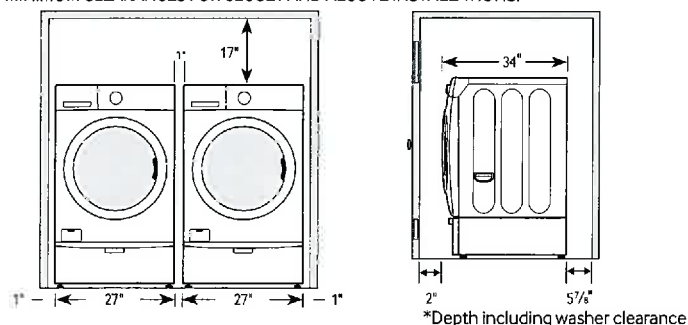

If the exhaust duct is installed at the rear of the dryer, the rear must have at least 5 7/8 inch clearance.

### 2. With stacked washer and dryer

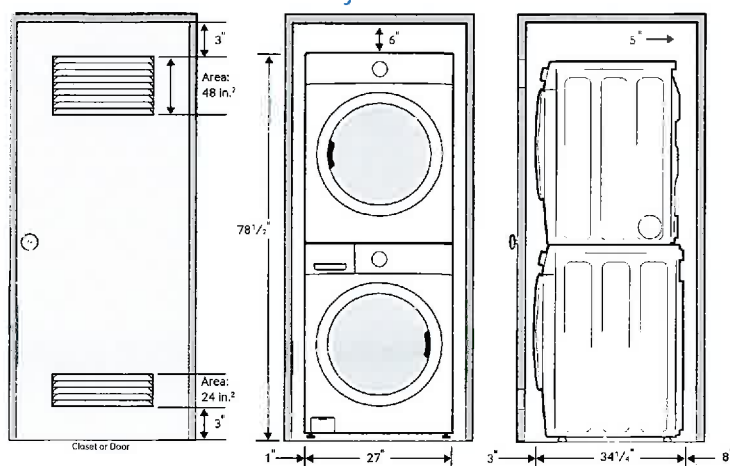

## 7.5 cu. ft. Capacity DOE

### 4-Way Venting

### 14 Preset Dry Cycles:

Steam Refresh, Steam Wrinkle Away, Steam Sanitize, Eco Normal, Normal, Heavy Duty, Permanent Press, Active Wear, Bedding, Delicates, Wool, Time Dry, Air Fluff, Quick Dry

### 11 Options:

Mixed Load Bell, Wrinkle Prevent, Anti-Static, My Cycle, Adjust Time (Up), Adjust Time (Down), Eco Dry, Sound, Child Lock, Smart Care, Drum Light

### 5 Temperature Settings:

High, Medium, Medium Low, Low, Extra Low

### 5 Dry Levels:

Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

### Warranty

One (1) Year Parts and Labor  
One (1) Year Control Board

### Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 3/4" x 32 7/16"

Weight: 126 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 3/8" x 33 1/2"

Weight: 134 lbs

### Electric

Model #	UPC Code
DV45K6500EV	887276138381
DV45K6500EW	887276138404

### Gas

Model #	UPC Code
DV45K6500GV	887276138411
DV45K6500GW	887276138428

### Matching Washer

Model #	UPC Code
WF45K6500AV	887276138121
WF45K6500AW	887276138138

### Optional Stacking Kit

Model #	UPC Code
SKK-7A	887276146423

### Optional Side Vent Kit

Model #	UPC Code
DV-2A/XAA	887276146416

SAMSUNG

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

The Emerging Technology award recognizes innovative products that have the potential to significantly reduce greenhouse gas emissions.

©2016 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.