

# APPLIANCE SPEC INFORMATION SHEET

STE & LOT:

Coastal South

DATE:

Sept 5/17

SITING:

☐ Standard

Lo 135

☐ Reverse

## RANGE

☐ 30" (STD)

☐ 36"

☐ 48"

☐ GAS

☒ COOKTOP (APRON)

☐ COOKTOP (DROPIN)

☐ AMPS \_\_\_\_\_

☐ AMPS \_\_\_\_\_

☐ AMPS \_\_\_\_\_

## REFRIGERATOR

☐ STANDARD OPENING 36" X 72"

☒ BUILT IN FRIDGE

☐ WATERLINE REQUIRED

☐ PANELLED/INTEGRATED

☐ FLUSH INSET

## WALL OVENS

☒ 30"

☐ SINGLE

☐ DOUBLE

☐ STEAM OVEN

☐ WARMING DRAWER

☐ AMPS \_\_\_\_\_

☐ AMPS \_\_\_\_\_

☐ AMPS \_\_\_\_\_

☐ AMPS \_\_\_\_\_

## MICROWAVES

☒ BUILT IN MICRO

☐ MICRO TRIM KIT

☐ OVER THE RANGE

☐ AMPS \_\_\_\_\_

☐ MODEL \_\_\_\_\_

☐ AMPS \_\_\_\_\_

## HOOD FANS

☐ CHIMNEY (CENTRE VENT)

☐ UNDER CABINET

☐ FLUSH INSET

☐ 6 INCH (STD)

☐ 8 INCH

☒ 10 INCH

## DISHWASHER

☐ 24" (STD SIZE)

## LAUNDRY

☒ FRONT LOADING SIDE BY SIDE

☐ STACKABLE

☐ TOP LOAD

Additional charges may apply for cabinetry, electrical and plumbing in order to accommodate the specs given by the homeowner.

**NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specs are DUE (if not received during appointment):

**2 WEEKS FROM SIGNED DATE ABOVE** – Specs received after this date and changes are required to accommodate the appliances, an administration fee of minimum \$250 will apply.

\*Changes must be approved by head office.

Purchaser Signature

Madam Dault

Date

Sept 5/17

Purchaser Signature

[Signature]

Date

Sept 5/17

30" E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN



MDD30TE/S/TH

**FEATURES**

Integrates into any kitchen

Matches E series ovens, coffee systems, convection steam oven

900 watts of power

Generous 1.6 cu. ft. capacity

Quick-start controls for popular items

Gourmet mode cooks automatically from preset recipes

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

SPB5/17  
L0635S



K2  
M-2

30" E SERIES TRANSITIONAL DROP-DOWN DOOR MICROWAVE OVEN





PRODUCT SPECIFICATIONS

Model	MDD30TE/S/TH
Dimensions	29 7/8"W x 17 7/8"H x 20"D
Door Clearance	14 3/16"
Weight	80 lb
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Overall Capacity	1.6 cu ft
Power Cord Length	4 feet

ELECTRICAL

**E** ELECTRICAL SUPPLY WITHIN OPENING OR IN ADJACENT CABINET WITHIN REACH OF POWER CORD

DIMENSIONS

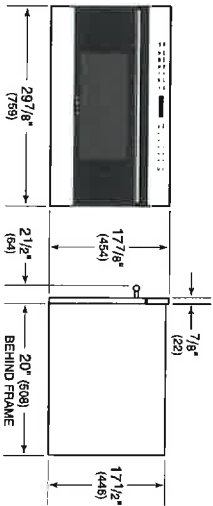


L06355


SPB 5/17

KZ  
M.2


STANDARD INSTALLATION

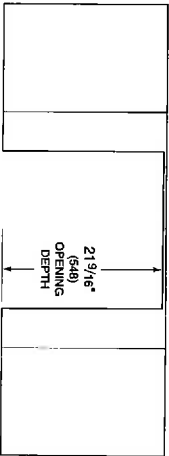

TOP VIEW



SIDE VIEW

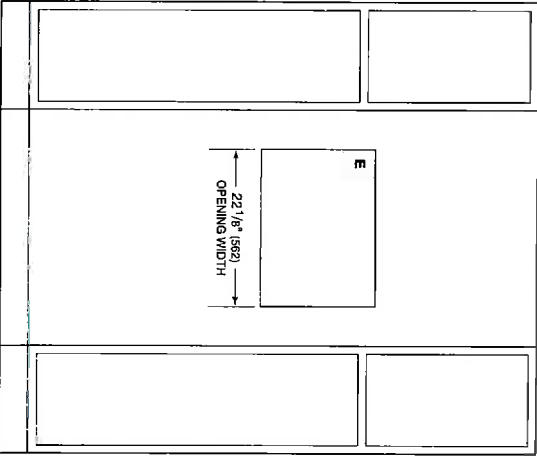

FRONT VIEW



42 in

Electric Dryer

LOB355


Spl 5/17

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F,  
WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions


Front view:

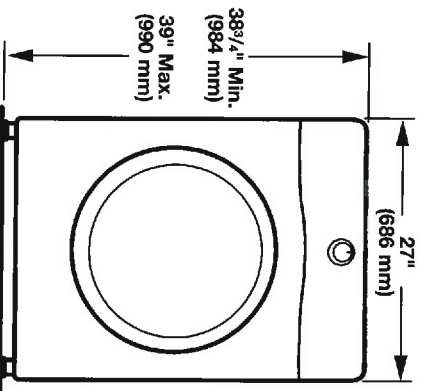

Side view:

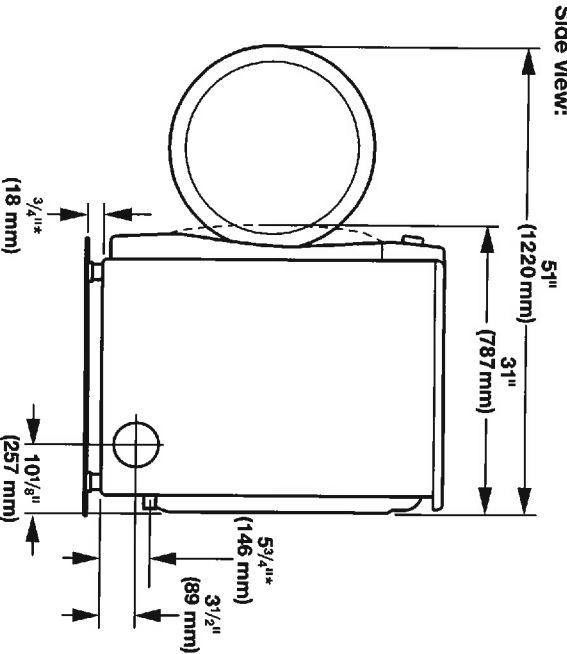

Back view:

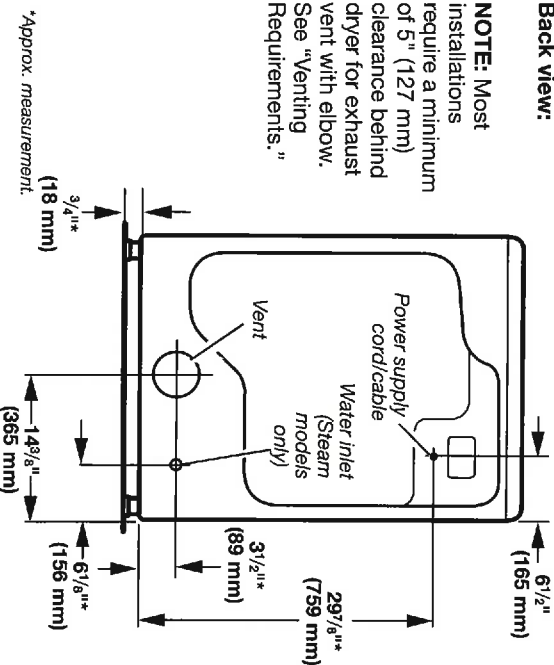

**NOTE:** Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."


\*Approx. measurement.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.

- Companion appliance spacing should also be considered.
- Recommended installation clearances (dryer only):**

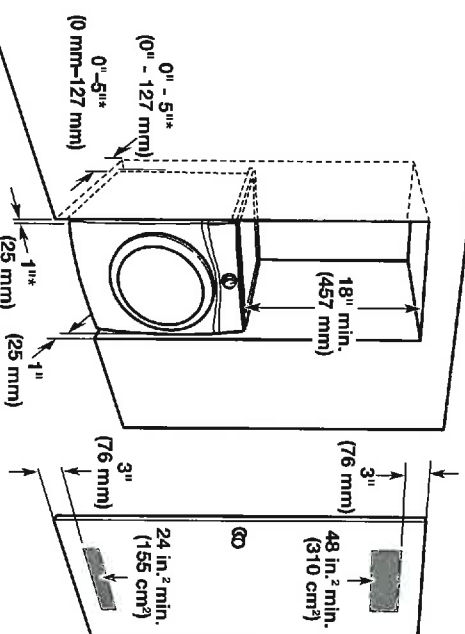


\*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

\*\*0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

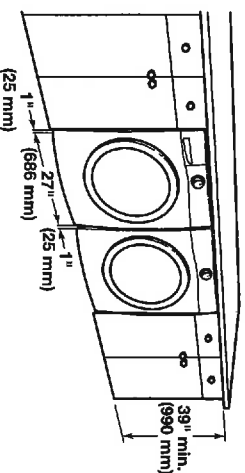

## ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

Lot 1355  
SP15/17

## VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.


**WARNING:** To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**

**IMPORTANT:** Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.


- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.
- Do not use plastic or metal foil vent.

### Exhaust hoods:

#### Recommended Styles:




Louvered Hood



Box Hood

#### Acceptable Style:



Angled Hood

#### Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

#### Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

**NOTE:** Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) - ELE - XXXXXX-XXX.

**NOTE:** For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



# D5536XXLF1

Handwritten mark: A large blue checkmark.

Handwritten note: M-L

## XXL DISHWASHERS



### UNIT DIMENSIONS

	U.S.	Metric
Height (Adjustable)	33-7/8" to 35-7/8"	861 mm to 912 mm
Width	23-5/8"	596 mm
Depth (Includes high loop)	22-7/8"	581 mm
Depth W/Door Open	49-1/2"	1258 mm
Weight	110 lb	50 kg

### Technical Data

Electricity	120V, 60Hz, 15 amp
Water pressure	4.2 - 140 psi, 0.03-1.0 MPa, 0.3-10 Bar
Heating element	1200 watt
Max loading	1300 watt

Handwritten notes: 601355 and Spd 5/17

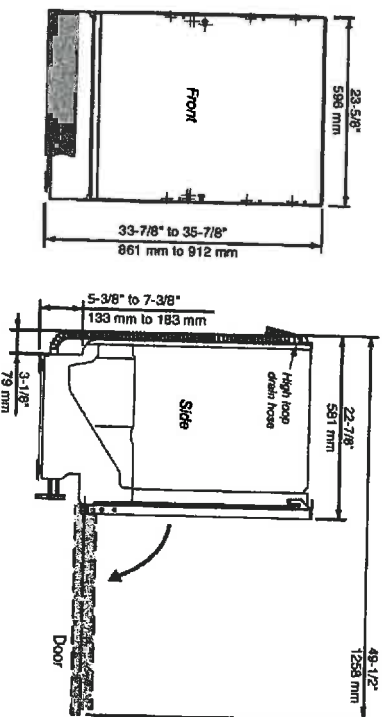

Reverse hose within the high loop bracket to accommodate a left side drain.

### PREPARING THE LOCATION

The best place for your dishwasher is in the kitchen near the sink. This makes it easier to connect the water and drain supply lines.

A built-in dishwasher must be enclosed on the top, both sides and the back.



The power-supply receptacle for the appliance shall be installed in a cabinet or on a wall adjacent to the undercounter space in which the appliance is to be installed.

The electrical and water supplies should enter through the area indicated by the shading on the illustration at right. Preferably, they should come through the right side of the machine. The access hole must be round and smooth and no bigger than 1-1/2" (38 mm) in diameter. If the partition is metal, it needs to be covered with an edge protector. Use caution when the appliance is installed or removed, to reduce the likelihood of damage to the power-supply cord.

\*\* If accessory F1 fill strips are used, then 1/2" (13 mm) must be added to the dishwasher height and cutout. Additionally, 3/8" (10 mm) must be added to the dishwasher width and cutout width. Remove locking nuts for an installed height of 33-7/8" (860-861 mm).

### Cutout Dimensions

	U.S.	Metric
Height**	33-7/8" - 36"	860 - 914 mm
Width	23-5/8" - 24"	600 - 610 mm
Depth	24"	610 mm

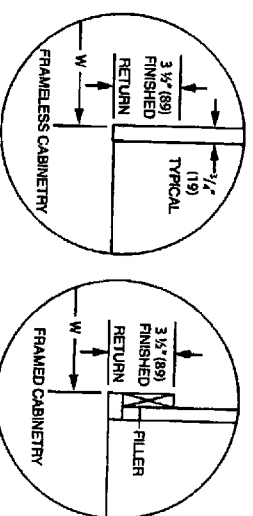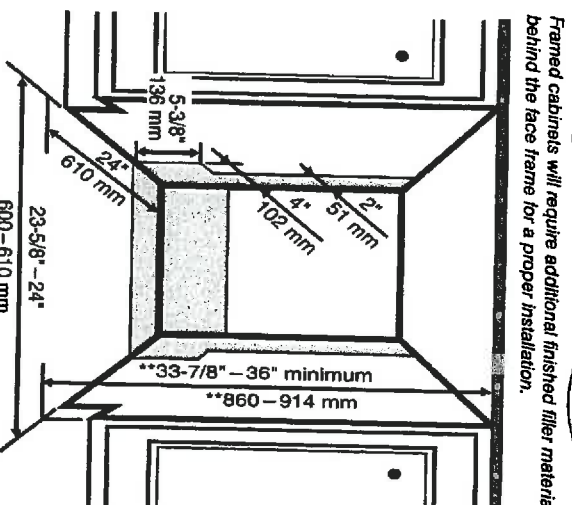

Framed cabinets will require additional finished filler material behind the face frame for a proper installation.

2013SS

Sold 5/17

K2

M-2

STEP 2. ATTACHING THE ACCESSORY DOOR OR CUSTOM PANEL



Follow the separate instructions supplied with the dishwasher to attach the chosen accessory door or custom panel to the front of the machine.

NOTE:

Once you have fitted the accessory door or custom panel to the dishwasher, the door springs may need adjusting. Check that the door stays in the position in which it is placed. If the door drops down when you open it, the springs need to be tightened. If the door shuts on its own, the springs need to be loosened. See step 3 for further instructions.

NOTE:

The custom panel must not cover the air nozzle and thereby block the flow of air.

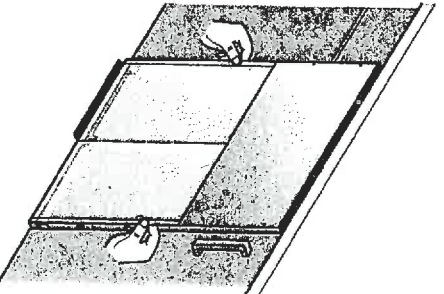

Custom Panel Dimensions

	Width	Height
Custom panel XXL (4" toe kick)	23 3/8" (600 mm)	30-1/8" (765 mm)
Custom panel XXL (6" toe kick)	23 3/8" (600 mm)	28-1/8" (714 mm)

Panel Requirements

Max. Weight (including handle)	20 lb (9 kg)
Min. Thickness	3/4" (19mm)

Typical panel dimensions are based on a 23 5/8" (600 mm) opening width and 34 1/2" (876 mm) finished height, with a minimum 4" (102 mm) toe kick and 1/8" (3 mm) reveals. For all other opening widths, the panel should be 1/4" (6 mm) less than the opening to achieve minimum reveals. Panel dimensions must be adjusted accordingly for all other installations.

46" PRO HOOD LINER - 19" DEPTH



P L 461912

FEATURES

- Heavy-duty stainless steel construction
- Infinite speed blower control
- Recessed controls for sleeker look
- Heat sentry for safety
- Bright halogen lighting
- Blower required (internal, in-line or remote blowers available)
- Transition with backdraft minimizes backward flow of cold air
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

Make-up air damper

Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).

L01355  
Sp/15/17



BLOWER OPTIONS

- 300 CFM Internal
- 450 CFM Internal
- 900 CFM Internal
- 1100 CFM Inline
- 900 CFM Remote
- 1200 CFM Remote
- 1500 CFM Remote
- 600 CFM Internal
- 1200 CFM Internal



46" PRO HOOD LINER - 19" DEPTH


WOLF

PRODUCT SPECIFICATIONS


Model	PL461912
Dimensions	46 3/8"W x 12"H x 19 1/4"D
Weight	60 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical
Discharge Dimensions	10" Round
Bottom of Hood to Countertop	30" to 36"

ELECTRICAL

DECORATIVE  
HOOD



DIMENSIONS

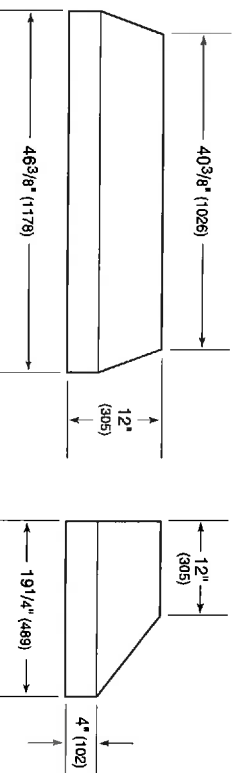

Lot 35  
Spd 5/17




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,  
WFW90HEF, WFW92HEF

Washer Dimensions:

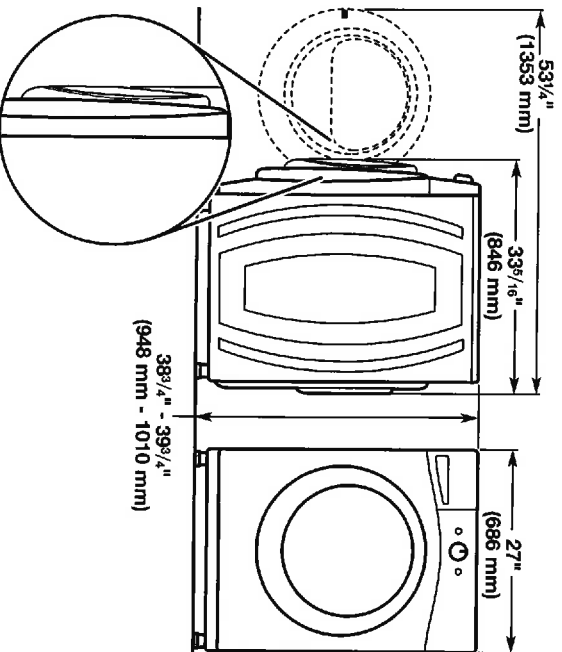

Recessed or closet installation -  
stacked washer and dryer

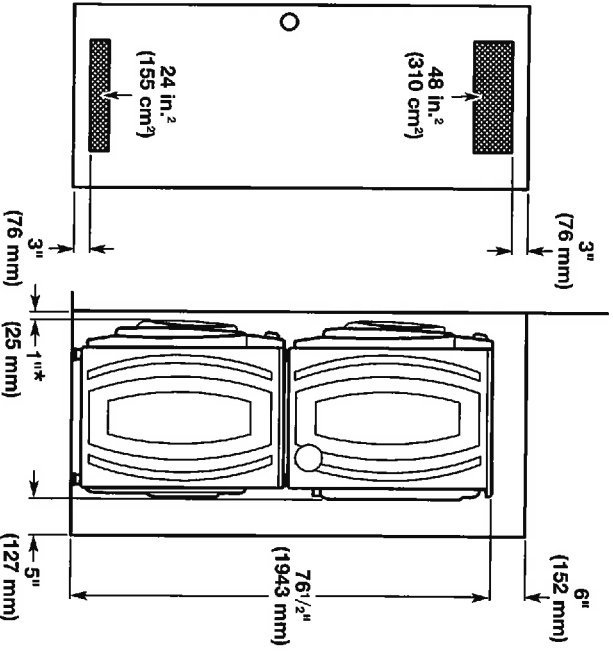


\* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

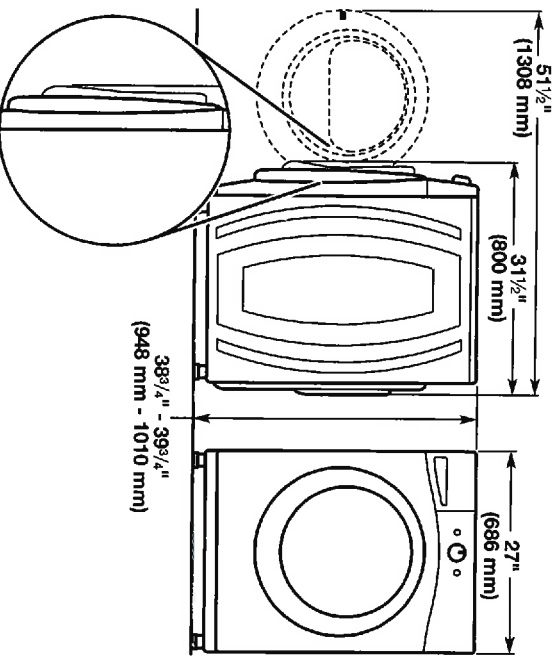

Recessed area or closet installation (washer only):

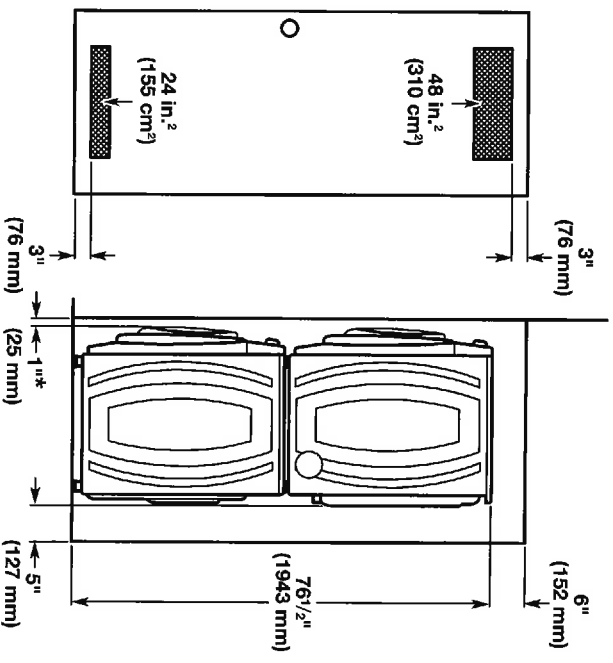


\* Add spacing of 1" (25 mm) on all sides of washer.

✓

W.N


601355

### Custom cabinet installation (washer only):

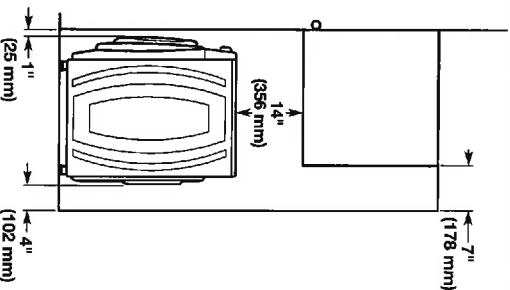

\*\* Recommended 4" (102 mm), minimum 1.5" (38 mm)

### Undercounter installation - washer only:

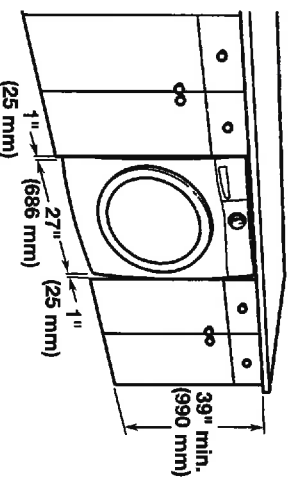

Spd 5/17

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

## ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

## DRAIN SYSTEM


Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system

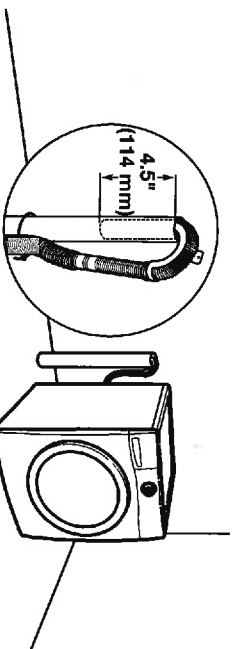


### Laundry tub drain system

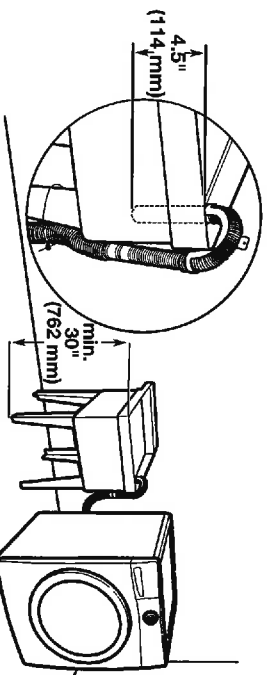

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


### Floor drain system

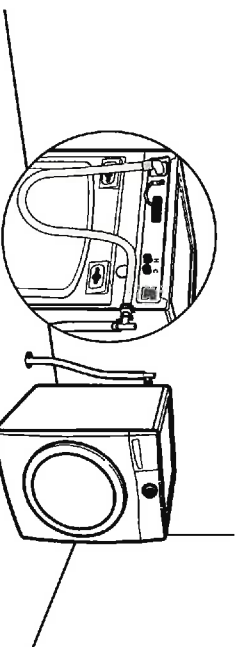

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

### Wall standpipe drain system

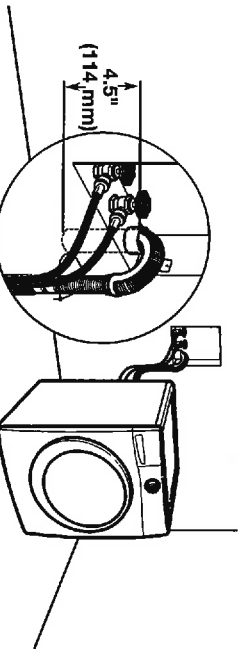

See requirements for floor standpipe drain system.

Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

PC

M.2

## 24" INTEGRATED COLUMN FREEZER WITH ICE MAKER - PANEL READY

SUB•ZERO

IC-24FI



### FEATURES

- Ready to be fitted with custom cabinetry or stainless steel panels
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Nano-coated spill-proof shelves for easy clean-up
- Smart-touch controls for streamlined access to more settings
- "Soft-on" LED lighting is bright and energy-efficient
- Uniform 84" height
- Automatic ice maker with "max ice" feature
- All-freezer storage solves capacity problems
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

### ACCESSORIES

- Dual installation kits
- Stainless steel front panels with tubular or pro handles
- Stainless steel kickplate
- Stainless steel side enclosure
- Stainless steel top enclosure
- Reduced toe kick divider for toe kicks from 3.875" to 2"
- Stainless steel tubular handles
- Stainless steel pro handles
- Replacement water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### HANDLE ACCESSORIES

PRO



TUBULAR



Lo1355  
Spd15/17

### PRODUCT DETAILS

#### FREEZER

- 3 Adjustable wire shelves
- 2 Storage drawers
- 5 Adjustable door shelves
- Ice drawer
- Automatic ice maker

24" INTEGRATED COLUMN FREEZER WITH ICE MAKER - PANEL READY


SUB-ZERO

PRODUCT SPECIFICATIONS


Model	IC-24FI
Dimensions	24"W x 84"H x 24"D
Door Clearance	22 1/2"
Weight	340 lb
Freezer Capacity	12.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35-120 psi

ELECTRICAL

PLUMBING

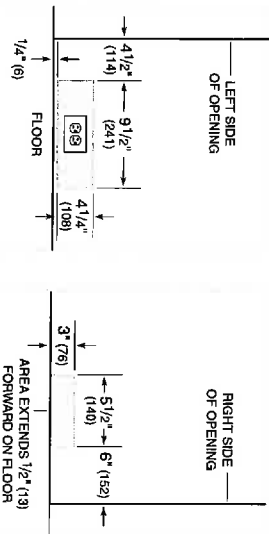


INTERIOR VIEW

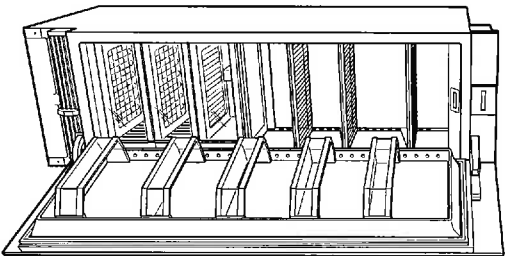


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

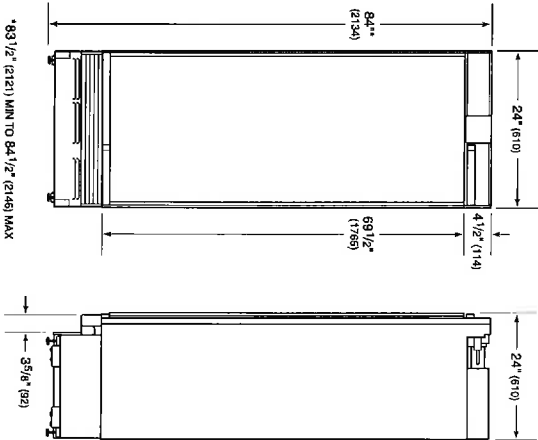

Lot 355  
Spd 5/17

STANDARD INSTALLATION

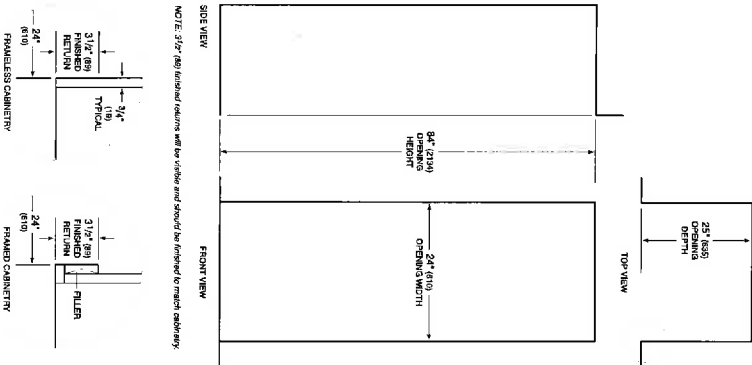



PC2

M2

## 30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN



SO30TE/S/TH



### FEATURES

- 10 cooking modes make meals easy
- Three adjustable oven racks
- Cobalt blue porcelain interior
- Self clean, delayed start, timed cook, Sabbath mode and more
- Installs flush with surrounding cabinetry
- Dual convection oven for faster, more consistent cooking
- Temperature probe lets you know when it's done
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Hidden bake element and recessed broil element

### ACCESSORIES

- 30" baking sheet
- Bake stone kit (stone, rack and peel)
- Dehydration kit (racks and door stop)
- Full-extension easy glide oven rack
- Temperature probe and broiler pan
- Set of three standard oven racks

Accessories available through an authorized Sub-Zero dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



2013SS

Sp15/17


30" E SERIES TRANSITIONAL BUILT-IN SINGLE OVEN




PRODUCT SPECIFICATIONS

Model	SO30TE/S/TH	
Dimensions	29 7/8"W x 27 7/8"H x 23 3/4"D	
Oven 1 Interior Dimensions	25"W x 16 1/2"H x 19"D	
Overall Capacity	4.5 cu ft	
Usable Capacity	2.8 cu ft	
Door Clearance	22"	
Weight	273 lb	
Electrical Supply	240/208 VAC, 60 Hz	
Electrical Service	30 amp dedicated circuit	
Conduit Length	4 feet	


ELECTRICAL



DIMENSIONS

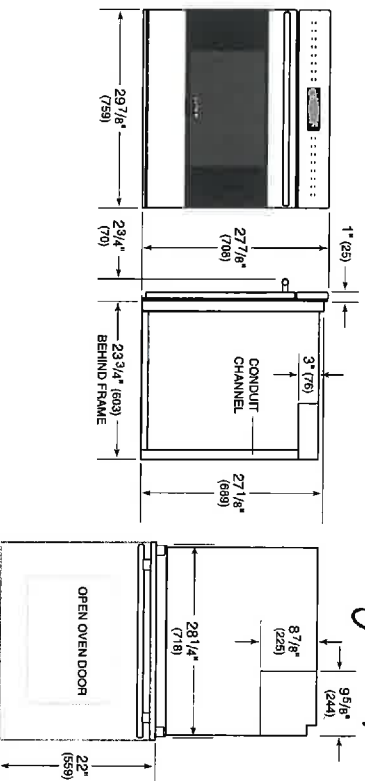

STANDARD INSTALLATION

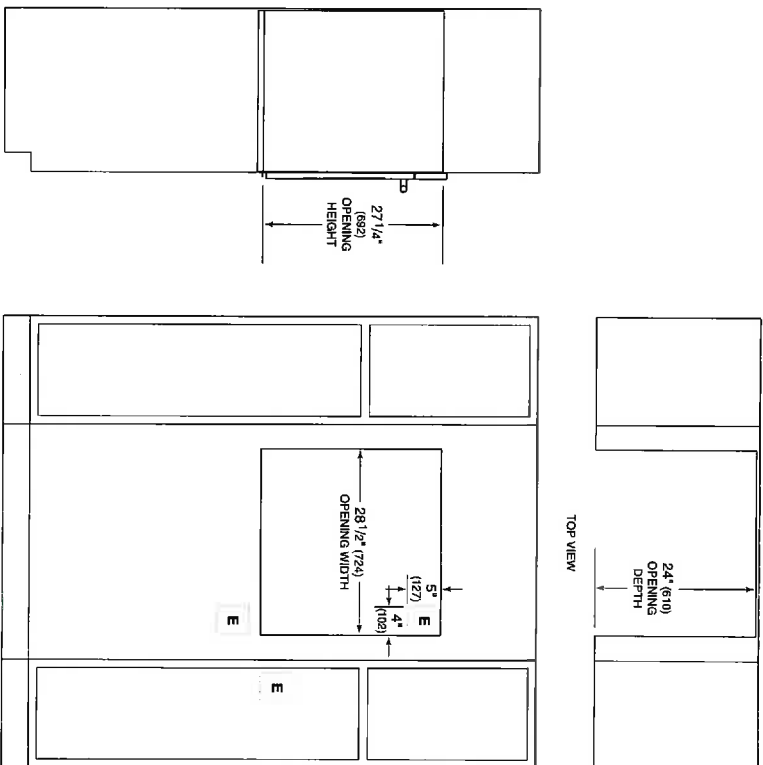

NOTE: Location of electrical supply within opening may require additional cabinet depth.

## 36" INTEGRATED COLUMN REFRIGERATOR - PANEL READY

SUB•ZERO

IC-36R



### FEATURES

- All-refrigerator storage solves capacity problems
- Ready to be fitted with custom cabinetry or stainless steel panels
- Nano-coated spill-proof shelves for easy clean-up
- Smart-touch controls for streamlined access to more settings
- "Soft-on" LED lighting is bright and energy-efficient
- Uniform 84" height
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- Soft-close doors and drawers

### ACCESSORIES

- Dual installation kits
- Stainless steel front panels with tubular or pro handles
- Stainless steel kickplate
- Stainless steel side enclosure
- Stainless steel top enclosure
- Reduced toe kick divider for toe kicks from 3.875" to 2"
- Stainless steel tubular handles
- Stainless steel pro handles

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### HANDLE ACCESSORIES

PRO



TUBULAR



### PRODUCT DETAILS

#### REFRIGERATOR

- 3 Adjustable glass shelves
- 2 Crisper drawers with dividers
- Deli drawer with dividers
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

601355  
Sp/5/17


36" INTEGRATED COLUMN REFRIGERATOR - PANEL READY

SUB-ZERO


PRODUCT SPECIFICATIONS

Model	IC-36R
Dimensions	36"W x 84"H x 24"D
Door Clearance	34 1/2"
Weight	460 lb
Refrigerator Capacity	21.4 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35-120 psi

ELECTRICAL





INTERIOR VIEW

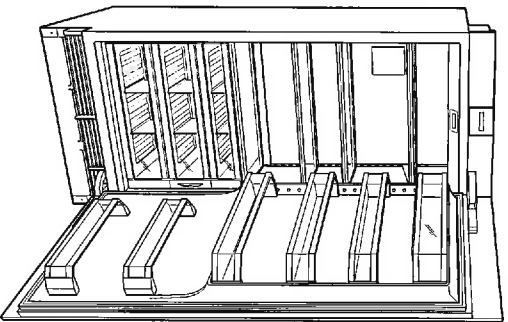


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


DIMENSIONS

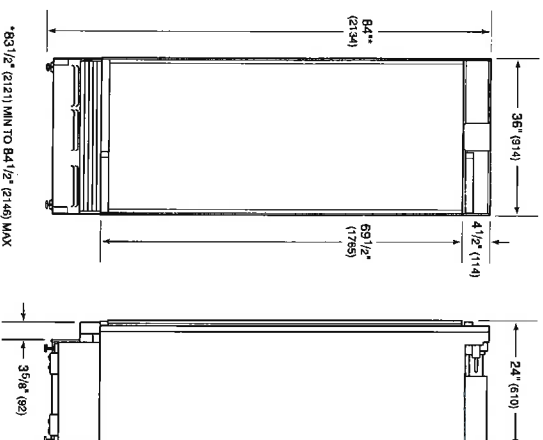

STANDARD INSTALLATION

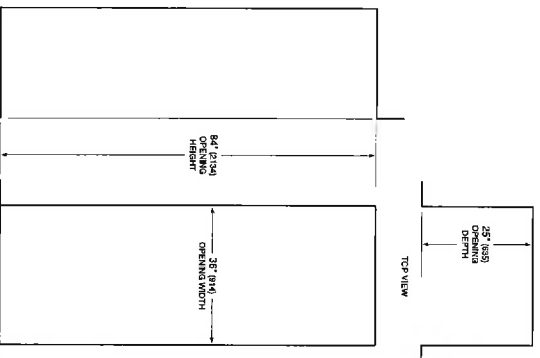

NOTE: 3/8\"/>



**48" SEALED BURNER RANGETOP - 6 BURNERS AND INFRARED GRIDDLE**

**WOLF**

**SRT486G**



**FEATURES**

- 6 dual-stacked burners plus 15,000 Btu infrared griddle
- Dual-stacked burners go from 20,000 Btu down to a mere breath of flame
- Continuous cast-iron grates for easy movement of pots and pans
- Heavy-gauge stainless steel
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Individual spark ignition system

**ACCESSORIES**

- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Cast iron S-grates and wok grate
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).




**KNOB OPTIONS**



LO1355

Spd 5/17

**TOP CONFIGURATION**

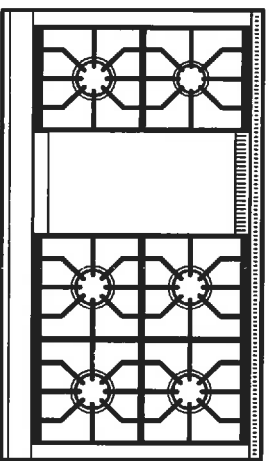

**RANGETOP SPECIFICATIONS**

- 1 - 9,200 Btu Burner
- 2 - 15,000 Btu Burners
- 2 - 18,000 Btu Burners
- 1 - 20,000 Btu Burner
- 1 - 15,000 Btu (13,000 Btu LP) Griddle




48" SEALED BURNER RANGETOP - 6 BURNERS AND INFRARED GRIDDLE




PRODUCT SPECIFICATIONS

Model	SRT486G
Dimensions	47 7/8"W x 8 1/2"H x 28 1/2"D
Weight	280 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female

ELECTRICAL AND GAS




DIMENSIONS

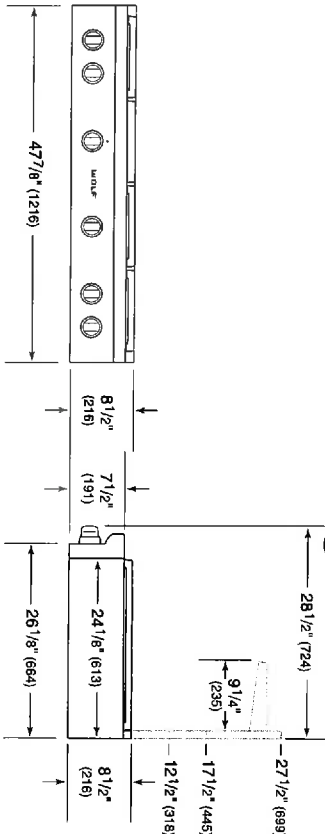

601355 SGL5/1.7

STANDARD INSTALLATION

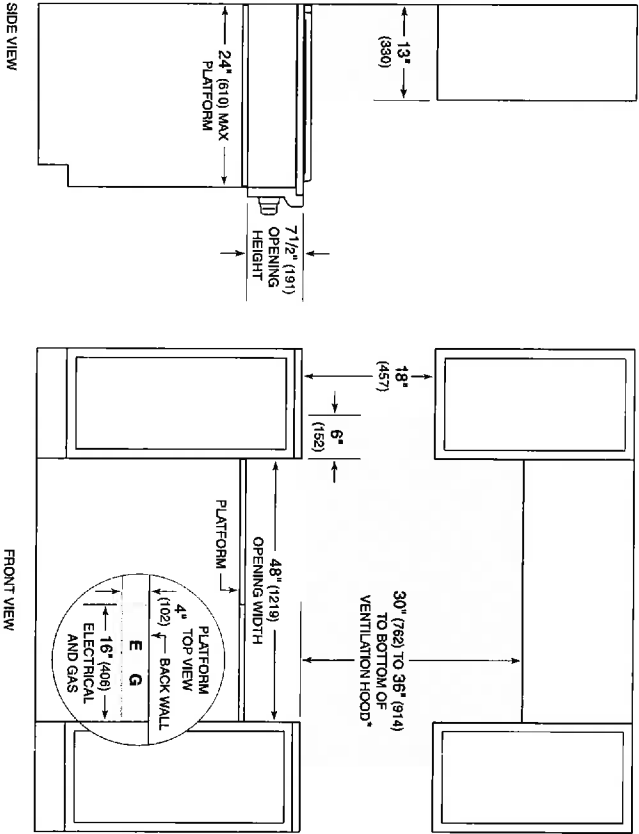

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charcoal.  
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.  
combustible materials cannot be located within this area.  
Electrical and gas supply located through bottom of platform.  
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.