

APPLIANCE SPEC INFORMATION SHEET

STE & LOT:

Lol 31-S
Cashless South

DATE:

Aug 31/17

SITING:

☐

Standard

☐

Reverse

RANGE

☐ 30" (STD)☒ 36"☐ 48"☐ GAS☐ COOKTOP (APRON)☐ COOKTOP (DROP IN)☐ AMPS _____☐ AMPS _____☐ AMPS _____

REFRIGERATOR

☐ STANDARD OPENING 36" X 72"☐ BUILT IN FRIDGE☐ WATERLINE REQUIRED☐ PANELLED/INTEGRATED☐ FLUSH INSET

WALL OVENS

☐ 30"☐ SINGLE☐ DOUBLE☐ STEAM OVEN☐ WARMING DRAWER☐ AMPS _____☐ AMPS _____☐ AMPS _____☐ AMPS _____

MICROWAVES

☐ BUILT IN MICRO☐ MICRO TRIM KIT☐ OVER THE RANGE☐ AMPS _____☐ MODEL _____☐ AMPS _____

HOOD FANS

☐ CHIMNEY (CENTRE VENT)☐ UNDER CABINET☐ FLUSH INSET☐ 6 INCH (STD)☐ 8 INCH☒ 10 INCH

DISHWASHER

☒ 24" (STD SIZE)

LAUNDRY

☒ FRONT LOADING SIDE BY SIDE☐ STACKABLE☐ TOP LOAD

CC Additional charges may apply for cabinetry, electrical and plumbing in order to accommodate the specs given by the homeowner.

CC **NOTE:** It is the Purchaser's responsibility to coordinate delivery, installation and hook up of appliances and to ensure they are installed as per Manufacturers specifications after closing.

CC Purchaser acknowledges responsibility for providing correct specification for such appliances. The purchaser agrees to deliver forthwith to the Builder the manufacturer's appliance specifications where the size exceeds the standard openings.

CC If specs not received, the standard openings as determined by Zancor Homes will be provided. If rework/repair is required due to late specs received, additional costs will be applied.

Appliance Specs are DUE (if not received during appointment):

2 WEEKS FROM SIGNED DATE ABOVE – Specs received after this date and changes are required to accommodate the appliances, an administration fee of minimum \$250 will apply.

*Changes must be approved by head office.

Purchaser Signature

Cavetti

Date

Aug 31/17

Purchaser Signature

[Signature]

Date

Aug 31/17

A431/17 10631-S.

36" GAS RANGE - 6 BURNERS



GR366




FEATURES

- 6 dual-stacked, sealed burners
- Dual-stacked, sealed burners for higher highs, lower lows
- Convection oven for faster, more consistent cooking
- Infrared broiler inside oven sears quickly and evenly
- Heavy-gauge stainless steel
- Enhanced views into oven
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Continuous cast-iron grates for easy movement of pots and pans
- Individual spark ignition system
- Adjustable legs for stability, plus rear casters

ACCESSORIES

- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.

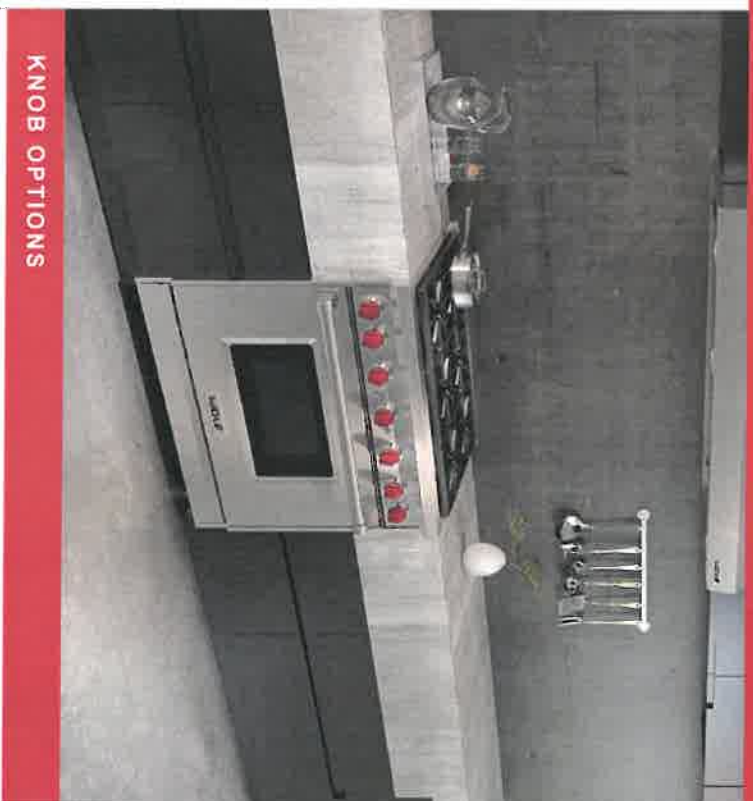

KNOB OPTIONS



TOP CONFIGURATION

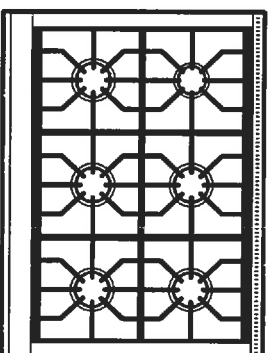

CC
JTE

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners

36" GAS RANGE - 6 BURNERS




Aug 31/17 60631-S

PRODUCT SPECIFICATIONS


Model	GR366
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu ft
Oven 1 Overall Capacity	5.5 cu ft
Door Clearance	19 1/2"
Weight	470 lb
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" rigid pipe
Gas Inlet	1/2" NPT female

ELECTRICAL


GAS

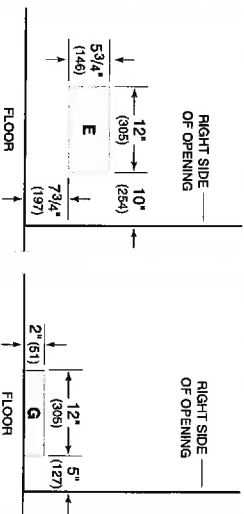

DIMENSIONS

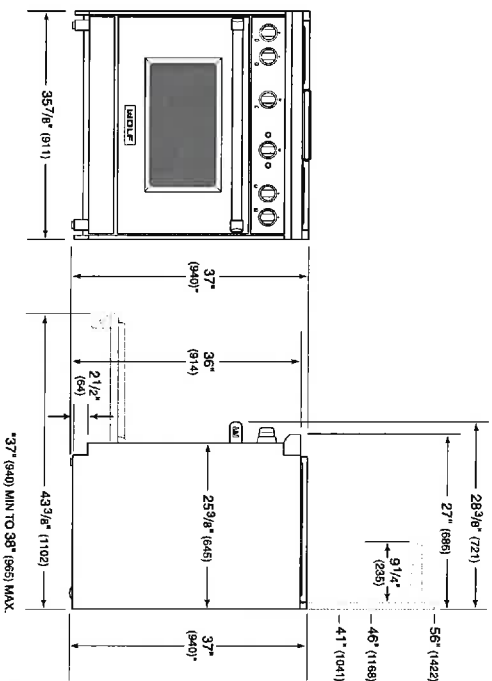

STANDARD INSTALLATION

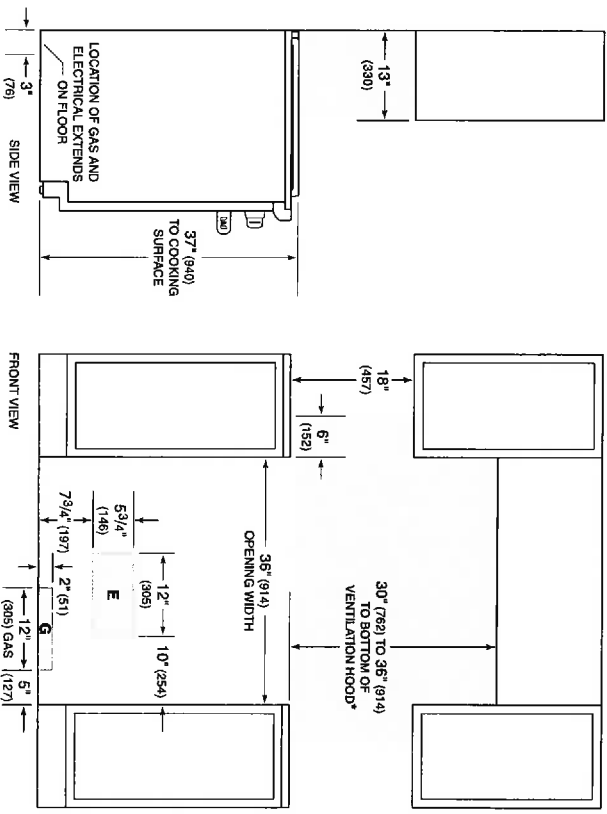

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charcoaler requires non-combustible materials.
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces.
combustible materials cannot be located within this area.
For Island Installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

cc



Front-Loading Washer


Aug 24/17

66131-5


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,
WFW90HEF, WFW92HEF

Washer Dimensions:

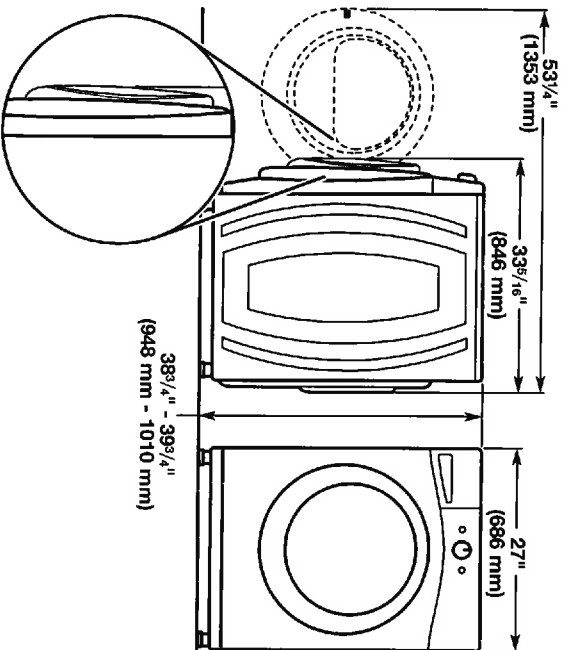

Recessed or closet installation -
stacked washer and dryer

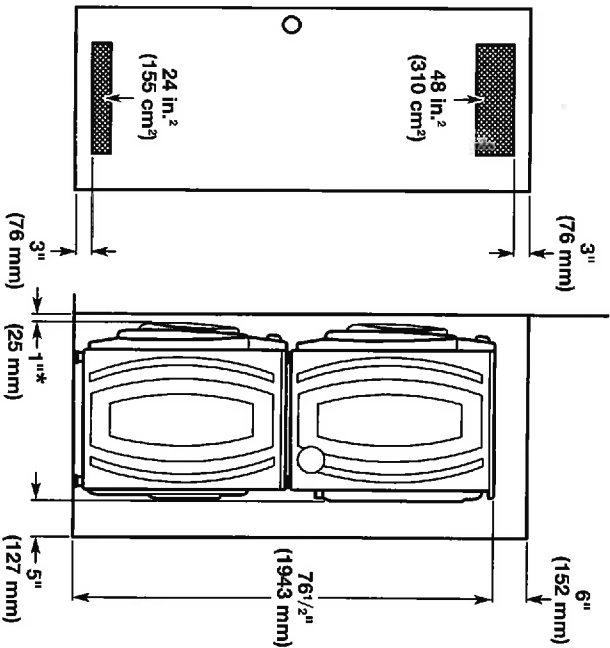


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

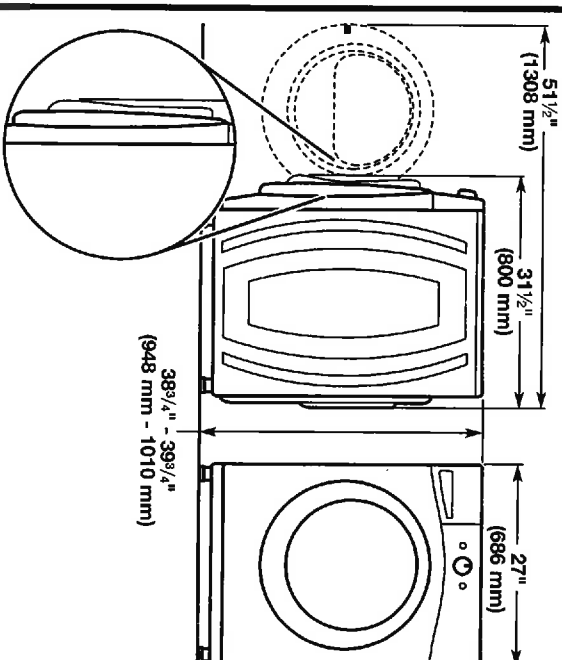


Recessed area or closet installation (washer only):

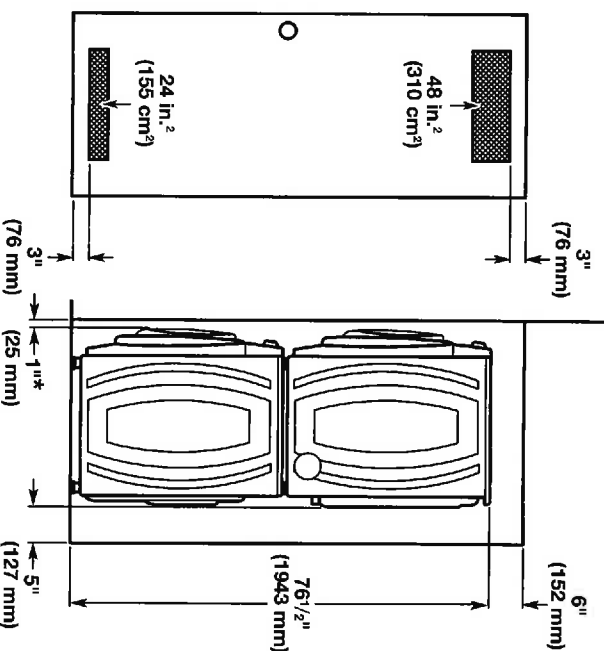

* Add spacing of 1" (25 mm) on all sides of washer.


Aug 3/17 60131-5

Custom cabinet installation (washer only):

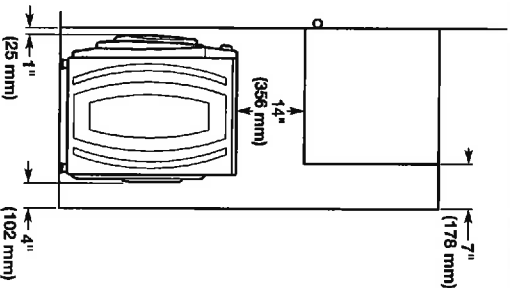

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

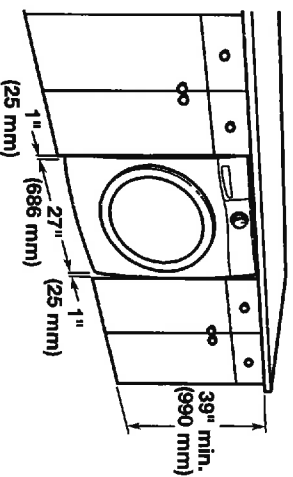

CC

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

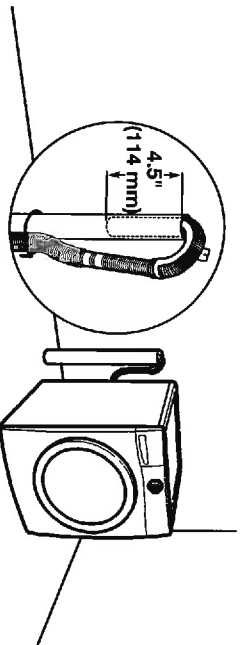


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Laundry tub drain system

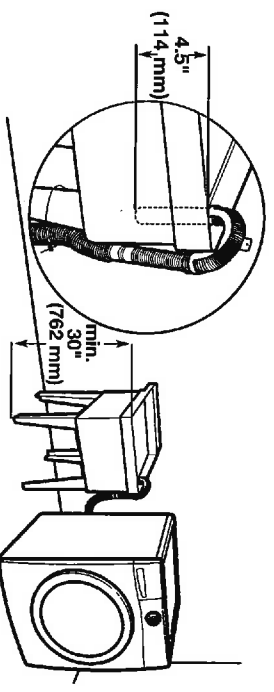


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

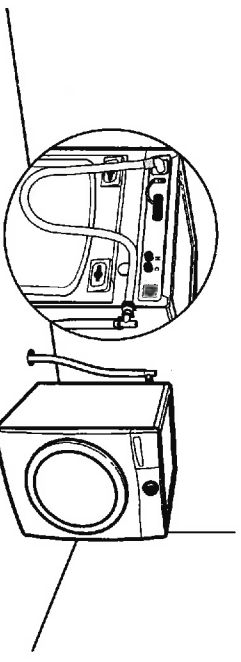

See requirements for floor standpipe drain system.

Wall standpipe drain system

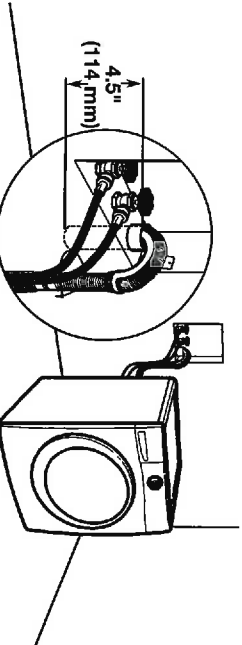

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

36" PRO WALL HOOD - 24" DEPTH



PW362418

FEATURES

- Heavy-duty stainless steel construction
- Handfinished with hemmed edges and welded seams
- Bright halogen lighting
- Infinite speed blower control
- Heat sentry for safety
- Recessed controls for sleeker look
- Blower required (internal, in-line or remote blowers available)
- Transition with backdraft minimizes backward flow of cold air
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

- 38" high stainless steel backsplash with or without warming racks
- 6", 12", 18", 24" and 30" high stainless steel duct covers
- Horizontal discharge kit
- Make-up air damper
- Recirculating kit and filter for non-ducted applications (internal blower)

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator

Aug 31/17 60131-S



BLOWER OPTIONS

- 300 CFM Internal
- 450 CFM Internal
- 1100 CFM Inline
- 1200 CFM Remote
- 1500 CFM Remote
- 600 CFM Internal
- 900 CFM Internal
- 900 CFM Remote

CC
[Signature]

36" PRO WALL HOOD - 24" DEPTH




Aug 31/17 Lot 31-S


PRODUCT SPECIFICATIONS

Model	PW362418
Dimensions	36"W x 18"H x 24"D
Weight	78 lb
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Discharge Location	Vertical or Horizontal
Discharge Dimensions	10" Round
Bottom of Hood to Countertop	30" to 36"

ELECTRICAL



DIMENSIONS

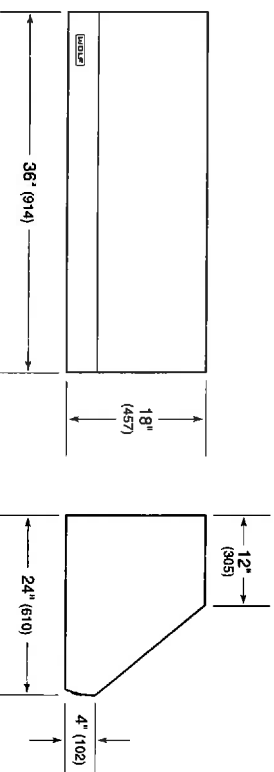

CC
[Signature]

Aug 31/17 Lot 131-S.
Inspired by Scandinavia

D5436XLS

Turbo Drying
Top tray for bowls and cutlery
Upper basket type: Premium
Lower basket type: Premium
Separate removable basket
Number of place settings: 16

Top tray functions
InstantLift™ - smart height adjustment of the top tray
Divisible and removable trays
Rack for knives and utensils
Rack for bowls and cups
Telescopic rails

Upper basket functions
Tight mesh base
Multi position wire shelf left
Multi position wire shelf right
Fixed pin rows
Fixed glass support
Wide knife stand

Lower basket functions
Foldable/divisible pin rows rear
Separate removable basket

Programs
Sanitation wash
Normal wash
Heavy wash
Quick wash
ECO wash

Options
Delayed start

Cleaning systems
Number of spray zones: 9
Number of spray arms: 3
MideaClean™ - extra washing power for pots and pans
SCS - Super Cleaning System™
Aqua Level™ Sensor
Stainless steel spray arms

Drying system
Turbo Drying™

Features
8 stainless steel parts
Time remaining indicator
Voice signal for the end of washing cycle
Hidden heater
Kidsafe - lockable controls

Water safety
Few sealing points outside the container
Long lasting seam welded tank
Waterproof external base
Exterior float
Aqua Detect™ Sensor
Aqua Level™ Sensor
Stand-by water protection
Yes
Max time water intake
Sound alarm
Anti-block drain pump



Installation
Adjustable feet
Multi fit outlet hose
Fixed high loop outlet hose
Trim kit

EAN code: 3839842042188
code: 492231

General
Product: Dishwasher
Mode of installation: Built-in
Size: XL (ADA height compliant)
Touch Screen Display
Number of programs: 7
Noise level: 46 dB(A)
Number of baskets: 3
EAN code: 3839842042188

Dimensions and installation
Height: 32 5/16 (820 mm)
Width: 23 15/16 (603 mm)
Depth: 22 7/8 (581 mm)
Packaging height: 35 1/16 (890 mm)
Packaging width: 25 3/16 (640 mm)
Packaging depth: 28 3/4 (690 mm)
Length electrical cord: 46 7/16 (1180 mm)
Length inlet hose: 66 1/8 (1680 mm)
Length outlet hose: 41 3/4 (1060 mm)
Weight net: 101 lbs
Weight gross: 109 lbs

Technical information
Voltage: 120 V
Current: 15 A

Consumption
Energy consumption/cycle: 0,87 kWh

CC
★

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB•ZERO

Aug 31/17 60131-5.

BI-36U/S



FEATURES

- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system for ice reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Clear-view, triple-pane and UV-resistant glass door
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- "Soft bright" interior lighting
- Over-and-under refrigerator/freezer storage
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

ACCESSORIES

- Stainless steel kickplate
- Grilles for 63" or 88" finished height (84" is standard)
- Side panel mounting kit
- Dual installation kit with or without dual wide grille—84" finished height

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



HANDLE OPTIONS

PRO



TUBULAR



PRODUCT DETAILS

REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with dividers
- 1 Storage drawer with dividers
- 2 Adjustable door shelves
- 1 Stationary door shelf
- Adjustable dairy compartment

FREEZER

- Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- Automatic ice maker

CC
[Signature]

36" BUILT-IN OVER-AND-UNDER REFRIGERATOR/FREEZER

SUB•ZERO


Aug 31/13 20131-5.

PRODUCT SPECIFICATIONS


Model	BI-36US
Dimensions	36"W x 84"H x 24"D
Door Clearance	37 1/4"
Drawer Clearance	23 5/8"
Weight	515 lb
Refrigerator Capacity	16.4 cu ft
Freezer Capacity	5.3 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi

ELECTRICAL

PLUMBING


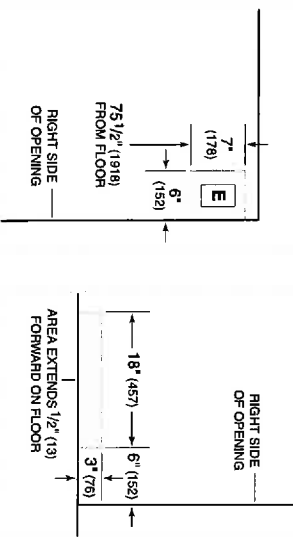


INTERIOR VIEW

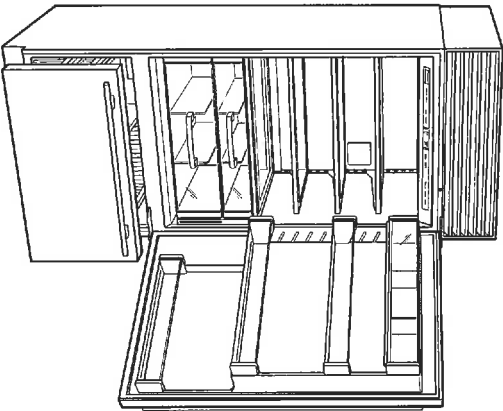


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

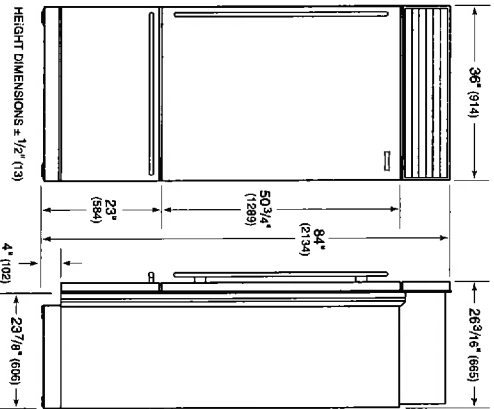


STANDARD INSTALLATION

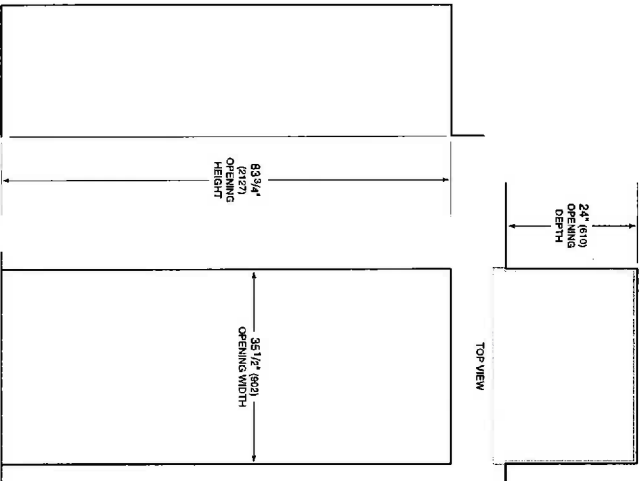




1

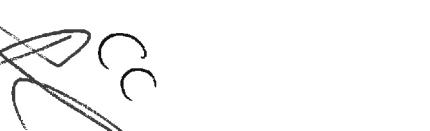

4

(u)	(u)	(u)
-----	-----	-----

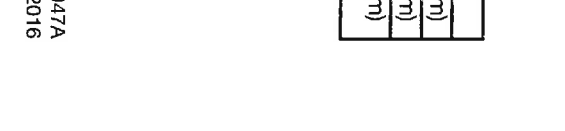
147A
2016

- 

 Σ

	(u)	(u)	(u)
--	-----	-----	-----

L



ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

Aug 31/17 6013x5

VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**


IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.

- Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.


- Do not use plastic or metal foil vent.

Exhaust hoods:

Recommended Styles:




Louvered Hood



Box Hood

Acceptable Style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart		
Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.