



LOT 96
INNSFIL

ALTA SERIES

BQLA1 MODEL

The uncompromising choice

Air quality is a top concern for today's families. The Broan series, with its superior capture efficiency, is the ideal solution. This model is sure to win over even the most demanding users with its innovative design, advanced technology, and unmatched performance.

SOPHISTICATED STYLE

- 3-speed performant dual blower, HVI* certified
- Quietest range hood offering a sound level of 0.3 sone at low speed
- Two ultra efficiency hybrid baffle filters, easy to clean
- Two built-in LED modules provide an even lighting over the cooktop
- Optional HCR3 handheld remote enables control from anywhere in the kitchen
- Use charcoal filter HPF30 or HPF36 for a non-ducted installation
- EZ 1 brackets make it easy for single-person installation in less than half the time of traditional methods

SPECIFICATIONS

WIDTH	MODEL	COLOR	VOLTS	AMPS	CFM	SONES (HVI 1998.8)	DUCTING
30"	BQLA130SS	STAINLESS STEEL	120	1.4	400	0.3/6.5	3 1/4" X 10" (H-V) 7" ROUND
30"	BQLA130WH	WHITE	120	1.4	400	0.3/6.5	3 1/4" X 10" (H-V) 7" ROUND
36"	BQLA136SS	STAINLESS STEEL	120	1.4	400	0.3/6.5	3 1/4" X 10" (H-V) 7" ROUND
36"	BQLA136WH	WHITE	120	1.4	400	0.3/6.5	3 1/4" X 10" (H-V) 7" ROUND

OPTIONS

HPFA430	REPLACEMENT FILTERS FOR 30 IN MODEL
HPFA436	REPLACEMENT FILTERS FOR 36 IN MODEL
HPF30	CHARCOAL REPLACEMENT FILTERS FOR 30 IN MODEL
HPF36	CHARCOAL REPLACEMENT FILTERS FOR 36 IN MODEL
HAWRK3	ADA WIRING KIT
HCR3	HANDHELD REMOTE CONTROL



Captur™

EXCLUSIVE SYSTEM

Provides faster smoke & odor removal



3-SPEED, WHISPER TOUCH
INFRARED CONTROL



3-LEVEL LIGHTING



TWO ULTRA EFFICIENCY
HYBRID BAFFLE FILTERS




FILTER CLEAN REMINDER



10 MINUTE DELAY OFF
SETTING



AUTOMATIC HEAT SENSOR
FUNCTION

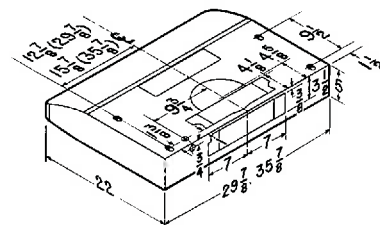

Broan-NuTone Canada ULC
1140 Tristar Drive
Mississauga (Ontario) L5T 1H9
1-888-882-7626

www.broan.ca


Specifications subject to change without notice.
*2017 Broan-NuTone ULC



*THE HVI (HOME VENTILATING INSTITUTE) CERTIFIES THE PERFORMANCE OF NORTH AMERICAN HOME VENTILATING PRODUCTS. IF A RANGE HOOD IS NOT HVI CERTIFIED, THERE ARE NO GUARANTEES REGARDING ITS PERFORMANCE.


BROAN

Under Cabinet Hoods

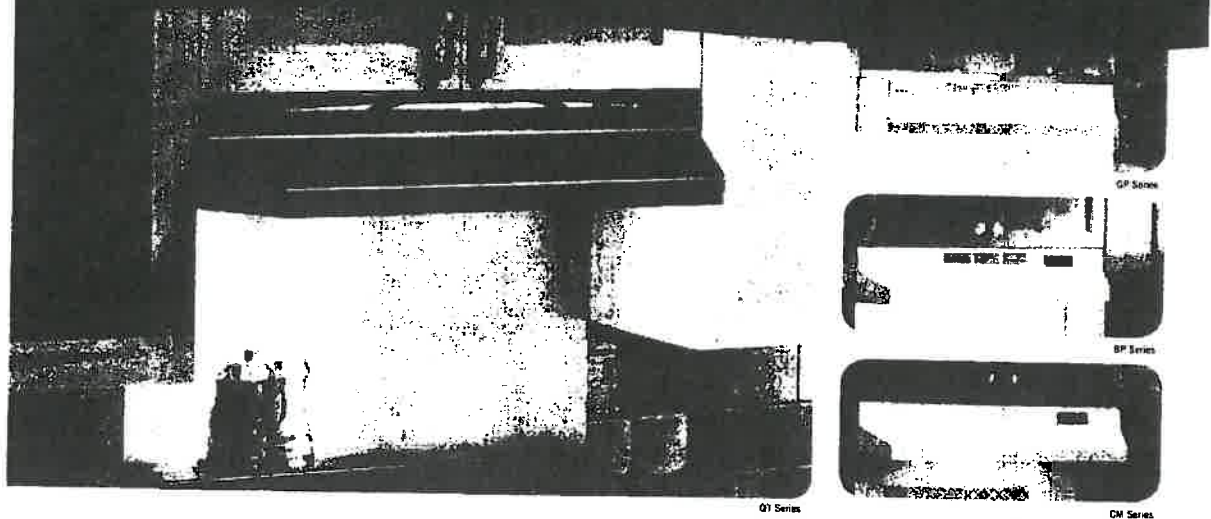

Broan QT, GP, BP and CM Series

Perfect for replacement as well as new installations, this powerful convertible Basic Performance range hood is ideal for use with any electric range.



SPECIFICATIONS

SERIES	WIDTH	STAINLESS STEEL	WHITE	WHITE W/ BLACK TRIM	BLACK	ALMOND	LIGHTING	CONTROL	CFM (min)	SONES (min)	INSTALLATION TYPE
QT	30"	QT230SSN	QT230WWN	—	QT230BLN	QT230AAN	2 x 40 W 2 intensities including night light	Rotary control for variable speed selection	210	5.0	3 1/4" x 10" (V.H.) 7" round*, non-ducted
	36"	QT236SSN	QT236WWN	—	QT236BLN	—			210	5.0	
GP	24"	GP124SSN	GP124WWN	GP124WHN	—	GP124ALN	1 x 75 W 2 intensities	Rotary control for variable speed selection	190	7.0	3 1/4" x 10" (V.H.) 7" round*, non-ducted
	30"	GP130SSN	GP130WWN	GP130WHN	—	GP130ALN			190	7.0	
BP	24"	BP124SSN	—	BP124WHN	BP124BLN	BP124ALN	1 x 75 W 1 intensity	Rocker switch 2 speeds	180	7.5	3 1/4" x 10" (V.H.) 7" round*, non-ducted
	30"	BP130SSN	BP130WWN	BP130WHN	BP130BLN	BP130ALN			180	7.5	
CM	24"	CM124SSN	—	—	—	—	1 x 75 W 1 intensity	Rocker switch 2 speeds	160	6.5	3 1/4" x 10" (V.H.) 7" round*
	30"	CM130SSN	CM130WWN	—	—	—			160	6.5	

OPTIONS

RFQTC	Replacement Charcoal Filter 30" & 36" (QT)	FKM65	Replacement Charcoal Filter (GP-BP)
RFQTA	Replacement Aluminum Filter 30" & 36" (QT)	RLSM65	Replacement Aluminum Filter 24" & 30" (GP-BP-CM)

* 7" round adapter/damper sold separately.



Broan-N-Tone Canada, Inc.
10000 10th Avenue
Oakville, Ontario L6T 1K7

www.broan.ca
(855) 687-2666

→ BROAN

30" BP130SSN


Builder's Steamboat.

SPECIFICATIONS




MODEL	BP SERIES
VOLTS	120 VAC
Hz	60
AMPS	1.7
CFM (VERT.)	180
CFM (HORIZ.)	180
CFM (ROUND)	210
SONES (VERT.)	7.5
SONES (HORIZ.)	7.0
SONES (ROUND)	7.0
DUCTING SIZE	7" ROUND* OR 3 1/4" x 10"
1 INCANDESCENT BULB	75 W
WARRANTY	1 YEAR

*7" ROUND ADAPTER/DAMPER SOLD SEPARATELY.

DIMENSIONS

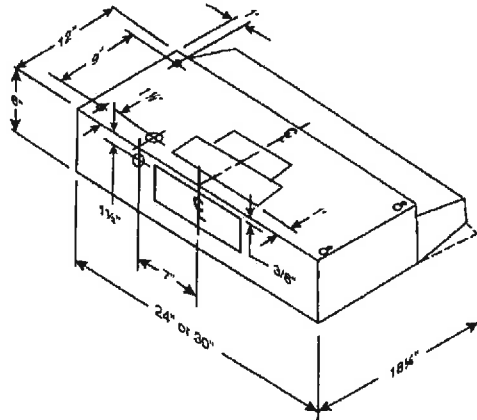

AIR FLOW PERFORMANCE

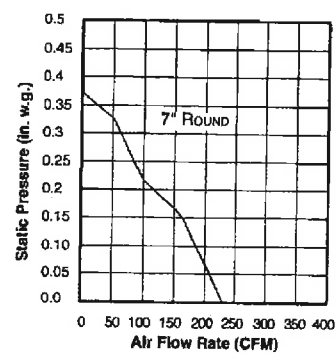

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



BROAN-NU-TONE CANADA INC., MISSISSAUGA, ONTARIO WWW.BROAN.CA 1-888-882-7626

PROJECT	REMARKS
LOCATION	
MODEL NO.	
QTY.	
SUBMITTED BY	
DATE	

PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

BP130d110308



COAST Wholesale
APPLIANCES

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.
L4K 5V8 *** TOLL FREE 1-888-745-0622
PH:(905)303-6909 FX:(905)856-5325
TORONTO LINE:(416)745-0622



"Innovative Products for Builders, Designers & Home Owners"

Sold To: RUPERT SPENCE
LOT 96 BELLE AIRE SHORES
1545 FARROW CRESCENT
INNISFIL
ON L9L 9L9

Ship To: RUPERT SPENCE
LOT 96 BELLE AIRE SHORES
1545 FARROW CRESCENT
INNISFIL
ON L9L 9L9

416-456-8734

SALES ORDER

Customer Class			Builders Allowance Name /# / Amount \$			Ship Via	Invoice #
003 BLDR CUST SALES				#	\$	COAST	1507918
Sales Representatives			Address:	Terms	Prov.Tax #	Customer #	Order #
F8 WAYNE W 18,7			LOT 96 BELLE AIRE SHORES	CASH SALES		KG658	1999728-01
			Shipping Location	Date Ordered	Date Allocated	Date Required	Order Type
			WOODBIDGE WHSE	21OCT17	15FEB18		REGULAR ORDER
			Customer P.O.#	Job #:	Change Order #:		
Quantity Ordered	Quantity BackOrd	Quantity Shipped	Model / Description			Price	Extension
1	1		FGHF2366PF FRIGIDAIRE GALLERY 22.6 CUFT,COUNTER DEPTH FRENCH DOOR BOTTOM MOUNT FRIDGE				
1	1		FGGF3059TF FRIGIDAIRE GALLERY GAS SS RANGE				
1	1		FGID2466QF FRIGIDAIRE GALLERY 24" SS DISHWASHER				
1	1		WFW85HEFC WHIRLPOOL FRONTLOAD WASHER CHROME SHADOW 5.2 CUFT 11 CYCLES, SS DRUM				
1	1		YWED85HEFC WHIRLPOOL 7.4CUFT DUET DRYER 7 CYCLES CHROME SHADOW				
1	1		48372 EZ FLO STAINLESS STEEL BRAIDED 6" WASHING MACHINE FILL HOSE				
1	1		41025 EZ FLO STAINLESS STEEL DRYER INSTALL KIT WASHING MACHINE FILL HOSE				
1	1		INSTALLATION HOOKUP INSTALLATION - HOOKUP WATERLINE TO FRIDG				
1	1		INSTALLATION-HOOKUP INSTALLATION - HOOKUP OF GASLINE TO RANGE				
1	1		INSTALLATION/DISH INSTALLATION OF DISHWASHER				
1	1		INSTALLATION LAUNDRY STANDARD INSTALLATION LAUNDRY				
1	1		PFA PACKAGE FREIGHT ALLOWANCE INCLUDED				
			Legend: * = Eco Fee Applicable, K = Keep for future shipment			PAYMENT	
			VISA 1,100.00			SUBTOTAL	
						PST	
						DEL/FUEL S/C	
						HST	
						TOTAL	

Report to:					
SM	CR	Shipper	Date Shipped	EXTENDED WARRANTY	
				ACCEPTED	REJECTED

GST# 79494 2516

PAGE 1 OF 2

Customer Copy

1999728-01/0000001

NOW 16 LOCATIONS TO SERVE YOU

www.coastappliances.com



**COAST Wholesale
APPLIANCES**

#1 - 1748 CREDITSTONE ROAD, VAUGHAN, ONT.
L4K 5V8 *** TOLL FREE 1-888-745-0622
PH:(905)303-6909 FX:(905)856-5325
TORONTO LINE:(416)745-0622



"Innovative Products for Builders, Designers & Home Owners"

Sold To: RUPERT SPENCE
LOT 96 BELLE AIRE SHORES
1545 FARROW CRESCENT
INNISFIL
ON L9L 9L9

Ship To: RUPERT SPENCE
LOT 96 BELLE AIRE SHORES
1545 FARROW CRESCENT
INNISFIL
ON L9L 9L9

416-456-8734

SALES ORDER

Customer Class			Builders Allowance Name /# / Amount \$			Ship Via	Invoice #
003 BLDR CUST SALES				#	\$	COAST	1507918
Sales Representatives			Address:	Terms	Prov.Tax #	Customer #	Order #
F8 WAYNE W 18,7			LOT 96 BELLE AIRE SHORES	CASH SALES		KG658	1999728-01
			Shipping Location	Date Ordered	Date Allocated	Date Required	Order Type
			WOODBIDGE WHSE	21OCT17	15FEB18		REGULAR ORDER
			Customer P.O.#	Job #:	Change Order #:		
Quantity Ordered	Quantity BackOrd	Quantity Shipped	Model / Description			Price	Extension
1	1		BA FRIDGE BASE CONTRACT BUILDERS ALLOW FRIDGE BASE				
1	1		BA RANGE BASE CONTRACT BUILDERS ALLOW RANGE BASE				
1	1		BA D/W BASE CONTRACT BUILDERS ALLOW D/W BASE				
1	1		BA WASHER BASE CONTRACT BUILDERS ALLOW WASHER BASE				
1	1		BA DRYER BASE CONTRACT BUILDERS ALLOW DRYER BASE				
1	1		BA HOSES BA HOSES				
1	1		BA BUILDERS ALLOWANCE				
			CREDIT FOR INSTALL STANDARD PACKAGE				
			Legend: * = Eco Fee Applicable, K = Keep for future shipment			PAYMENT SUBTOTAL PST DEL/FUEL S/C HST TOTAL	
			VISA 1,100.00				
19	19						

Report to:					
SM	CR	Shipper	Date Shipped	EXTENDED WARRANTY	
				ACCEPTED	REJECTED

GST# 79494 2516

PAGE 2 OF 2

Customer Copy

1999728-01/0000001

NOW 16 LOCATIONS TO SERVE YOU

www.coastappliances.com



Dishwashers

FGID2466Q F/W/B

24" Built-In



Product Dimensions

Height (Adjustable)	33-1/2" - 35"
Width	24"
Depth (Including Door)	25"

More Easy-To-Use Features

8 Cycles

Adjustable Upper Rack

5 Level Wash

2 Cup Shelves

Integrated with Display

GraniteGrey™ Plastic Tub

Upper Rack Wash Cycle

52 dBA

Signature Features



OrbitClean® Wash System

Exclusive OrbitClean® Spray Arm provides 4 times better water coverage¹ for an excellent clean. And AquaSurge™ Technology adjusts washing pressure based on washing needs.



Quick Wash² 34-Minute Wash

Washes a full load of dishes in a quarter of the time! Perfect solution for those times when you need clean dishes quickly, but have a million things to do.



SaharaDry™ Technology

The Best Drying Performance³ with SaharaDry™ Technology. Gets up to 95% of dishes dry the first time; so there's no need to towel-dry before putting dishes away.




Smudge-Proof™ Stainless Steel⁴

Resists fingerprints and smudges so it's easy to clean.

ENERGY STAR®
NSF® International
Certification



Available in:



¹ Than a traditional lower spray arm.

² 30 or 34 minutes depending on model, based on normal cycle.

³ In its class based on industry drying tests using SaharaDry™ (March, 2012).

⁴ Select model only.

LOT 96
1/11/15/17

Features

Control Design	Fully-Integrated Express-Select®
Digital Display	Yes
Door Latch/Stay-Put Door Hinge Design	Yes/Yes
Low Rinse-Aid Indicator Light	Yes
Interior Colour/Interior Design	GraniteGrey™/Tall Tub
Wash System	Direct Feed
Wash Arm	OrbitClean®
Wash Levels/Wash Speeds	5/3
DishSense™ Technology	Yes
AquaSurge™ Technology	Yes
Sound Package	SilentDesign™ 1
Filter/Filter Trap	S-Steel/Removable
Soft Food Disposer	Yes
dB Level	52
Drying System	SaharaDry™

Cycles

Number of Cycles	8
PowerPlus® (Heavy)	Yes
Normal	Yes
Light	
Quick Wash (34-Min.)	Yes
Favourite	Yes
China Crystal	Yes
Rinse Only	Yes
Energy Saver Plus	Yes
Upper Rack Wash Only	Yes
Cycle Indicator Light/Control Lock	No/Yes
Cycle Complete Floor Beam Indicator	

Options

Heat/No Heat Dry	Yes/Yes
Hi-Temp Wash	Yes
NSF® Certified Sanitize Rinse	Yes
Delay Start	1-24 Hour

Rack System

Rack Design	Supreme
Rack Coating	Nylon TufRacks™
Upper Rack -	
Rack Handles	Yes
Stemware/Champagne Glass Holders	Yes
Fold-Down Tines	Yes
Cup Shelves/Stemware Grips	2/No
Versa-Tray™	
Adjustable Rack	Yes
Lower Rack -	
SpaceWise® Silverware Basket	3-Piece Split
Fold-Down Tines	2 Full Rows
Small Items Cover	2


Certifications

ENERGY STAR®	Yes
NSF® International Certification	Yes

Specifications

Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	4.9 - 8.5
Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
Leveling Legs	4
Power Supply Connection Location	Right Bottom Front
Voltage Rating	120V/60 Hz
Connected Load (kW Rating) @120 Volts¹	1.20
Amps @ 120 Volts	10
Shipping Weight (Approx.)	83 Lbs.

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

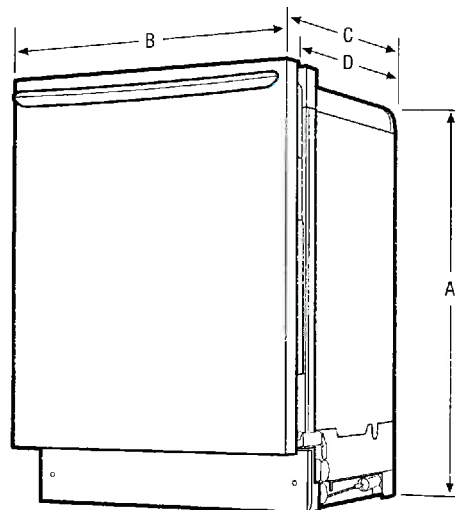

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions

A - Height (Adjustable)	33-1/2" - 35"
B - Width	24"
C - Depth (Including Door)	25"
D - Depth (To Tub Flange)	22-1/2"
Depth with Door Open 90°	49-1/4"

Cutout Dimensions

Height (Min.)	34-1/4"
Height (Max.)	35-3/4"
Width (Min.)	24"
Depth (Min.)	24"

Lot 96
Innisfil

Accessories information available on the web at frigidaire.ca

FRIGIDAIRE

FRIGIDAIRE GALLERY

Freestanding Range

FGGF3058RF

30" Gas




Griddle Included

Signature Features



Quick Preheat

Preheat in just a few minutes.*



True Convection

Single convection fan circulates hot air throughout the oven for faster and more even multi-rack baking.



One-Touch Quick Self Clean

Your oven cleans itself — so you don't have to. Self clean options available in 2-, 3- and 4-hour cycles.



Smudge-Proof™ Stainless Steel

Resists fingerprints and cleans easily.

Product Dimensions

Height (Max.)	47-3/4"
Width	29-7/8"
Depth (Including Handle)	28-13/32"

More Easy-To-Use Features

Effortless™ Convection

Takes the guesswork out of convection cooking — our oven automatically adjusts standard baking temperatures to convection temperatures for consistent results.

Power Burner

Power Burner offers more power and faster boil time.

Effortless™ Temperature Probe with Auto Keep Warm

The Effortless™ Temperature Probe allows you to set the desired finished temperature and alerts you when that temperature has been reached. The oven then holds the desired temperature of the meat by switching to a Keep Warm function for better cooking results.

Continuous Corner-to-Corner Grates

Move heavy pots & pans without lifting with continuous, corner-to-corner grates.

Low Simmer Burner

Perfect for cooking delicate foods and sauces.

Precision Set™ Controls

Adjust heat levels more precisely, providing exceptional temperature control.

Sabbath Mode (Star-K® Certified)

Available in:



Stainless
(F)

Burners	BTU
Right Front	18,000
Right Rear	5,000
Left Front	9,500
Left Rear	12,000
Centre Oval	10,000

*Based on single rack cooking performance, not set temperature, using Quick Preheat.

Lot 96
INNS FC

Features

Oven Control/Timing System	Express-Select® Controls
Surface Type	Black Porcelain
Sealed Gas Burners	Yes
Grates	Continuous Cast Iron w/ Black Matte Finish
Window	Extra-Large
Exterior Door Finish	Smudge-Proof™ Stainless Steel
Handle Design	Stainless Steel
Exterior Finish (Side Panels)	Black
Convection System	True Convection
Oven Cleaning System	Self Clean
Drawer Functionality	Storage

Oven Controls

Bake / Broil	Yes / Variable (400-550°F)
Effortless™ Convection Conversion	Yes
Convection Bake / Broil / Roast	Yes / No / Yes
Quick Bake Convection	
Quick Preheat	Yes
My Favourite	
Effortless™ Temperature Probe	Yes
Pizza Button	
Keep Warm	Yes
Add-a-Minute	
Delay Start	
Self Clean	2, 3, 4 Hours
Quick Clean Option	Yes
Delay Clean	2, 3, 4 Hours
Kitchen Timer / Timed Cook Option	Yes / No
Auto Oven Shut-Off	
Oven Lockout	Yes
Lower Drawer Control	

Cooktop Features

Right Front Burner (BTU)	18,000
Right Rear Burner (BTU)	5,000
Left Front Burner (BTU)	9,500
Left Rear Burner (BTU)	12,000
Centre Extra Zone Burner (BTU)	10,000

Oven Features

Capacity (Cu. Ft.)	5.0
Oven Light	Yes
Rack Configuration	3 Standard
Baking System	Even Baking Technology
Broiling System	Vari-Broil™ Hi/Lo
Bake Burner / Broil Burner (BTU)	18,000 / 13,500
Drawer Racks	

Optional Accessories


LP Gas Conversion Kit	PN# GRLP4
Griddle	Included

Certifications

Sabbath Mode (Star-K® Cert.)	Yes
------------------------------	-----

Specifications

Oven Interior (H x W x D)	18-5/8" x 24-3/8" x 19-1/8"
Power Supply Connection Location	Left Bottom Rear
Gas Supply Connection Location	Right Bottom Rear
Voltage Rating	120V / 60Hz / 15A
Amps @ 120 Volts	15
Shipping Weight (Approx.)	215 Lbs

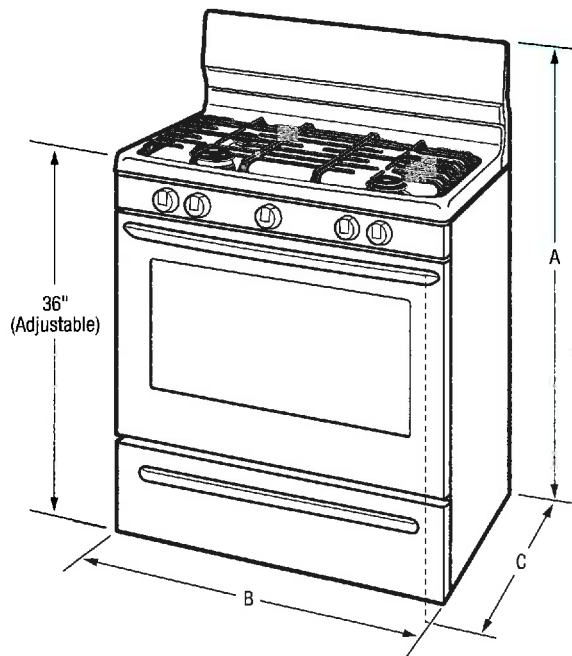

NOTE: For planning purposes only. Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions

A - Height (Max.)	47-3/4"
B - Width	29-7/8"
C - Depth (Including Handle)	28-13/32"
Depth with Door Open 90°	46-5/8"

Cabinet Cutout Dimensions

Height (Standard)	36"
Width (Min.)	30"
Depth (Min.)	24"

Lot 96 Invisi

Accessories information available on the web at frigidaire.ca




Electric Dryer

PRODUCT MODEL NUMBERS


WED7505F, WED75HEF, WED7740F, WED77HEF, WED8540F,
WED85HEF, WED90HEF, WED92HEF

Dryer Dimensions

Front view:

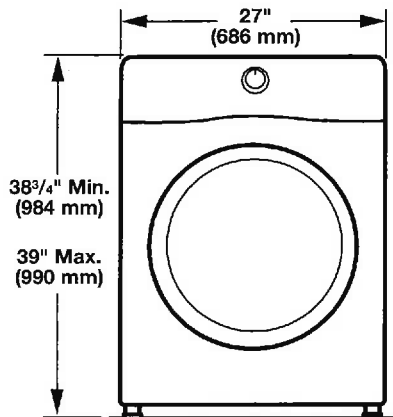


Side view:

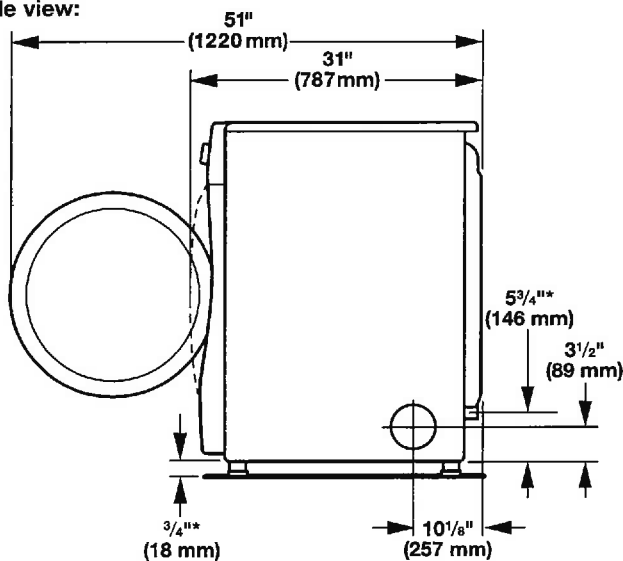

Back view:

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

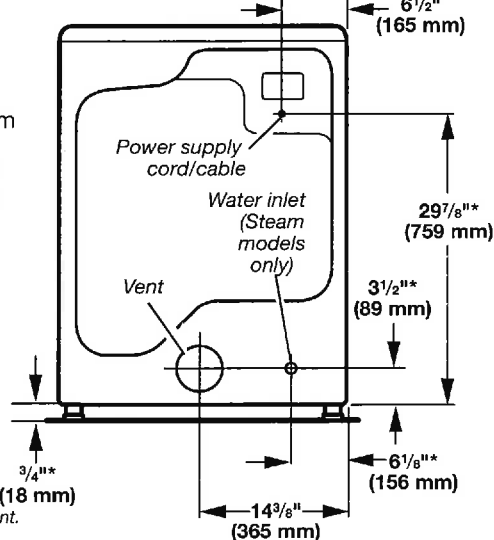


*Approx. measurement.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, and dryer venting.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

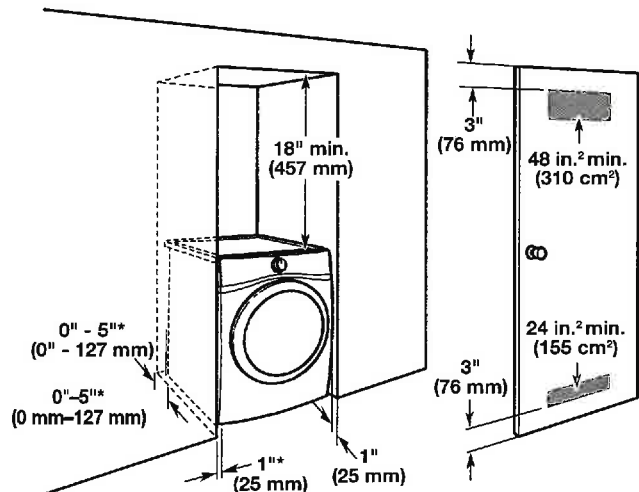


*0" (0 mm) spacing is allowed for straight-back venting only. For steam models only, inlet hose must not be kinked.

Minimum installation clearances (dryer only):

	Front	Sides	Rear	Top
Recessed	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Closet	NA	0" (0 mm)	0" (0 mm)**	0" (0 mm)
Under Counter	NA	1" (25 mm)	0" (0 mm)**	0" (0 mm)

**0" (0 mm) spacing is allowed for straight-back venting only.

Custom under counter installation:

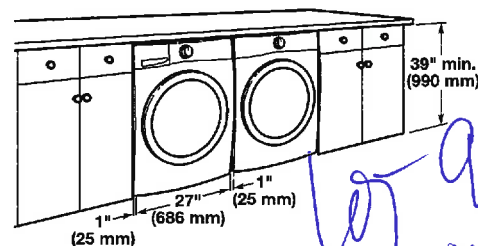

W10868947A
10/2016

ELECTRICAL REQUIREMENTS

To supply the required 3- or 4-wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3- or 4-wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit. Do not use an extension cord.

VENTING REQUIREMENTS

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

WARNING: To reduce the risk of fire, this dryer **MUST BE EXHAUSTED OUTDOORS.**


IMPORTANT: Observe all governing codes and ordinances. Dryer exhaust must not be connected into any gas vent, chimney, wall, ceiling, attic, crawlspace, or a concealed space of a building. Only rigid or flexible metal vent shall be used for exhausting.

■ Only a 4" (102 mm) heavy metal exhaust vent and clamps may be used.


■ Do not use plastic or metal foil vent.

Exhaust hoods:

Recommended Styles:




Louvered Hood



Box Hood

Acceptable Style:



Angled Hood

Determine vent path:

- Select route that will provide straightest and most direct path outdoors.
- Plan installation to use fewest number of elbows and turns.
- When using elbows or making turns, allow as much room as possible.
- Bend vent gradually to avoid kinking.
- Use as few 90° turns as possible.

Determine vent length and elbows needed for best drying performance:

- Use the following "Vent System Charts" to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in "Vent System Charts."

Exhaust systems longer than those specified will:

- Shorten life of dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

The "Vent System Charts" provide venting requirements that will help achieve best drying performance.

Standard Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	64 ft. (20 m)
1	Rigid metal	54 ft. (16.5 m)
2	Rigid metal	44 ft. (13.4 m)
3	Rigid metal	35 ft. (10.7 m)
4	Rigid metal	27 ft. (8.2 m)

Long Vent System Chart

Number of 90° elbows	Type of vent	Angled hoods
0	Rigid metal	160 ft. (48.8 m)
1	Rigid metal	150 ft. (45.7 m)
2	Rigid metal	140 ft. (42.7 m)
3	Rigid metal	130 ft. (39.6 m)
4	Rigid metal	120 ft. (36.6 m)

To determine if your model has a long vent system, refer to the type code located on the serial number plate in the inner door well. Example: An electric model would be **DALV** (Long Vent) – ELE – XXXXXXXX-XXX.

NOTE: For long vent systems, use of box/louvered hoods will improve venting, regardless of length.

The dryer must be connected to the cold water faucet using new inlet hoses (not supplied). Do not use old hoses.

Lot 96
11/15/11

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




Front-Loading Washer


PRODUCT MODEL NUMBERS

WFW75HEF, WFW85HEF,
WFW90HEF, WFW92HEF

Washer Dimensions:

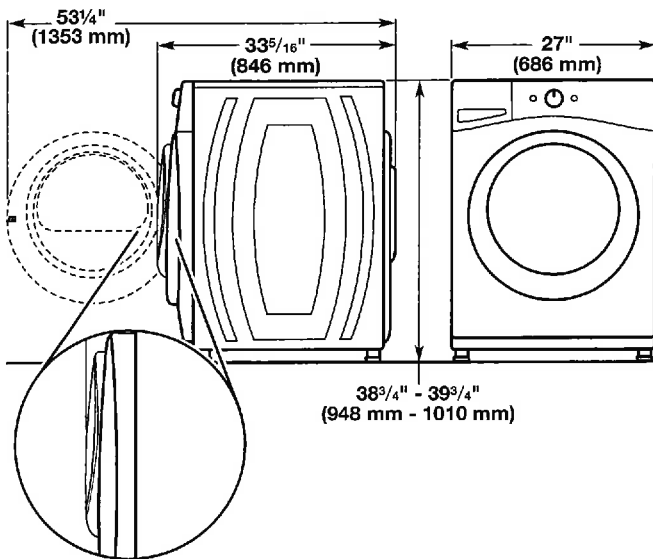

Recessed or closet installation -
stacked washer and dryer

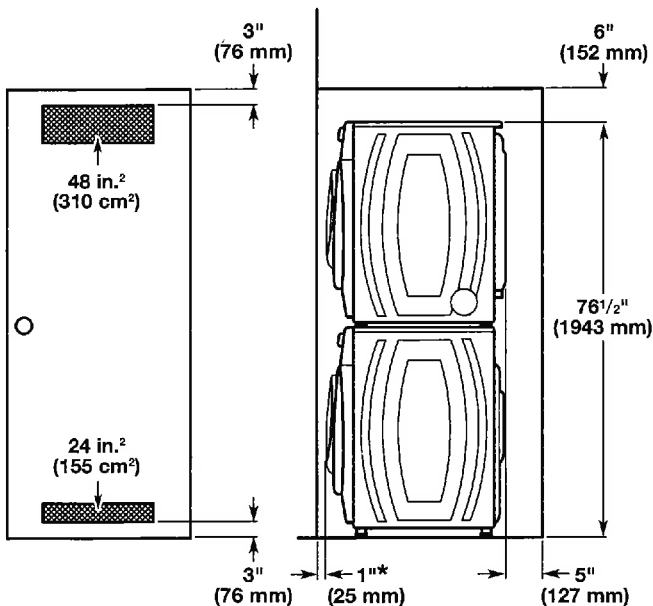


* Add spacing of 1" (25 mm) on all sides of washer/dryer.


PRODUCT MODEL NUMBERS

WFW7590F, WFW9290F,

Washer Dimensions:

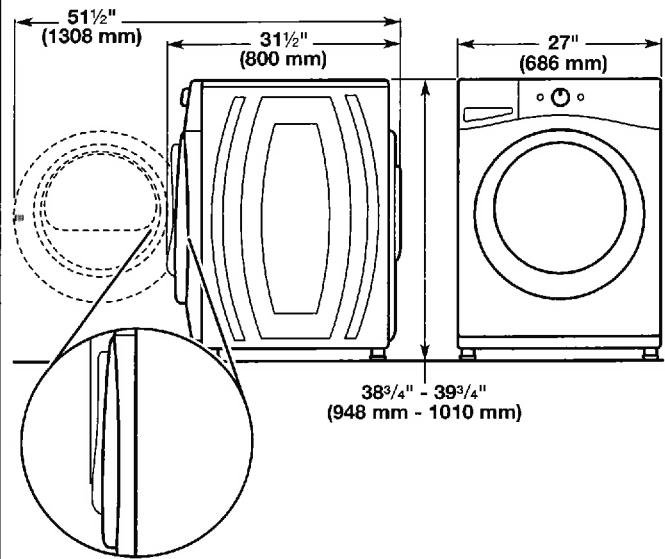


Recessed area or closet installation (washer only):

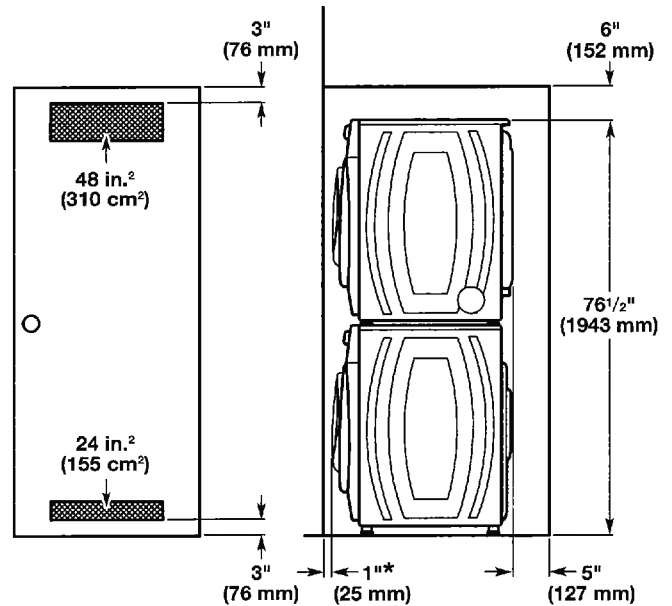


* Add spacing of 1" (25 mm) on all sides of washer.

Custom cabinet installation (washer only):

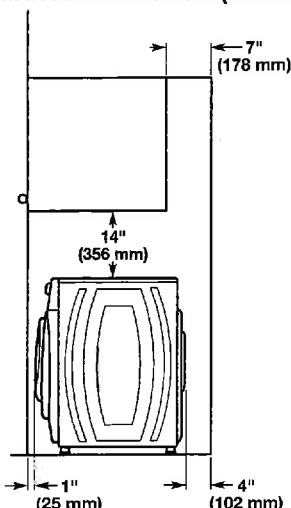

** Recommended 4" (102 mm), minimum 1.5" (38 mm)

Undercounter installation - washer only:

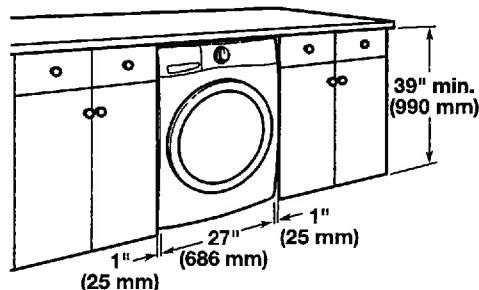

All dimensions show recommended spacing allowed, except for closet door ventilation openings which are the minimum required.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

ELECTRICAL REQUIREMENTS


A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

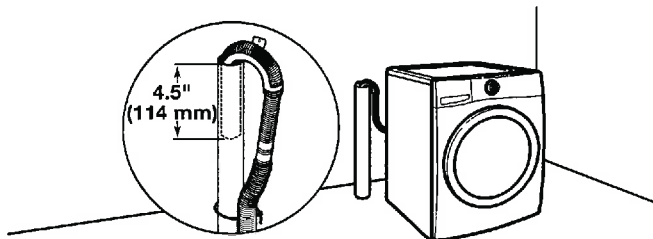


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate Parts".

Wall standpipe drain system

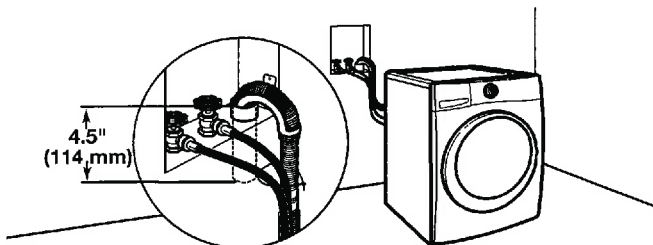


See requirements for floor standpipe drain system.

Laundry tub drain system

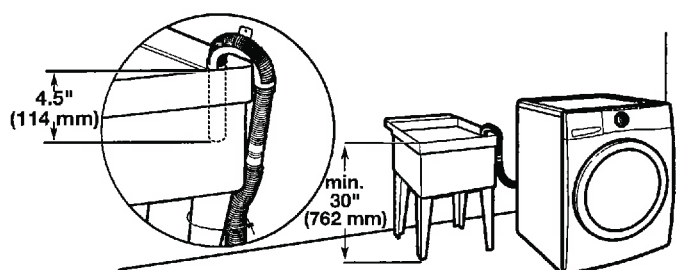

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

Floor drain system

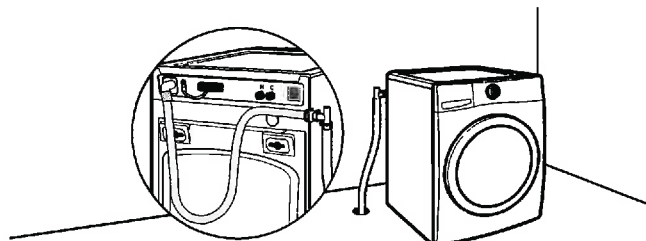

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. See "Alternate Parts". Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

605 910 1200

FRIGIDAIRE

GALLERY



French Door Refrigerator

FGHF2366PF

23 Cu. Ft. Counter-Depth



Product Dimensions

Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	28-1/2"

More Easy-To-Use Features

Multi-Level LED Lighting

Corner-to-corner LED lighting throughout the refrigerator for better visibility.

Counter-Depth Design

Maximize your kitchen space with our counter-depth refrigerator that gives you back 5 inches of kitchen space while still offering over 100 ways to organize.

Full-Width Cool Zone™ Drawer

A large capacity Cool Zone™ Drawer extends completely and provides space to easily store anything from sheet cakes and large platters to snacks and juice boxes.

LCD Express-Select® Controls on Ice and Water Dispenser

Easily select options with the touch of a button.

Freezer Basket with Divider

Deep freezer storage with adjustable divider keeps food organized and accessible.

Dual Ice Ready

Be ready for any occasion with an option for a second ice maker.

Quick Freeze

Quickly freeze foods so they stay at their freshest.

Effortless™ Glide Crisper Drawers

Our humidity-controlled crisper drawers can be configured any number of ways, either side-by-side or stacked on top of each other so you can organize your refrigerator the way you want, while keeping your fruits and vegetables fresh.

ENERGY STAR®

Sabbath Mode (Star-K® Certified)



Available in:

Stainless (F)

¹As compared to other consumer refrigeration water filtration systems.

²Select models only.

Signature Features



Adjustable Interior Storage

Over 100 ways to organize and customize your refrigerator.




SpillSafe® Flip-Up & Slide-Under Shelves

Easily make room for tall or large items with the new Flip-Up and Slide-Under Shelves.



Best-in-Class Ice & Water Filtration¹

PureSource Ultra® Water Filtration offers best-in-class water filtration so you get cleaner, fresher ice and water for your family.



Smudge-Proof™ Stainless Steel²

Reduces fingerprints and smudges so it's easy to clean.

frigidaire.ca

Features

Door Design	Soft-Arc Doors
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Stops / Door Closers	Yes / Yes
Door Hinge Covers	Hidden
Rollers - Front / Rear	Adjustable / Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top-Right Fresh Food Section
Sound Package	Quiet Pack

Dispenser

Controls	Express-Select®
Dispenser Design	Flush, Single-Paddle
Number of Dispenser Buttons	11
Crushed Ice / Cube Ice / Chilled Water	Yes / Yes / Yes
Ice Option / Freeze Option	No / Quick Freeze
Display On / Off Option	Yes
Lock / Light	Yes / Yes
Temp / Door Ajar / Power Failure Alerts	
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes

Refrigerator Features

Lighting	Multi-Level LED
Water Filter Type	PureSource Ultra®
Air Filter Type	PureAir Ultra®
Quarter-Width Fixed Shelves	1 SpillSafe® Flip-Up
Half-Width Fixed Shelves	1 SpillSafe® Slide-Under
Quarter-Width Sliding Shelves	
Half-Width Sliding Shelves	2 SpillSafe®
Canilever Shelves	Yes
Store-More™ Full-Width Drawer	1 Cool Zone™
Hanging Wine Rack / Can Dispenser	1 White / No
Crisper Drawer / Humidity Controls	1 White
Dairy Compartment	2 Clear / 2
Store-More™ Fixed Door Bins	2 White (1 per door)
2-Litre Fixed Door Bins	1 Clear
Gallon Adjustable Door Bins	2 Clear
2-Litre Adjustable Door Bins	
Dispenser Bin	1 Clear
Non-Slip Bin Liner / Bottle Retainers	

Freezer Features

Self-Closing Pull-Out Drawer	Yes
Sliding Full-Width Freezer Baskets	2 Effortless™ Glide
Basket Dividers	1 (Bottom Basket)
Lighting	LED
Automatic Ice Maker (2nd Ice Maker)	Optional (PN#IMK0023A)

Certifications




Sabbath Mode (Star-K® Certified)	Yes
ENERGY STAR®	Yes

Specifications

Total Capacity (Cu. Ft.)	22.6
Refrigerator Capacity (Cu. Ft.)	15.7
Freezer Capacity (Cu. Ft.)	6.9
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V / 60Hz / 15 or 20A
Connected Load (kW rating) @ 120 Volts¹	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	345 Lbs.

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Standard Refrigerator Depth vs. Counter Depth

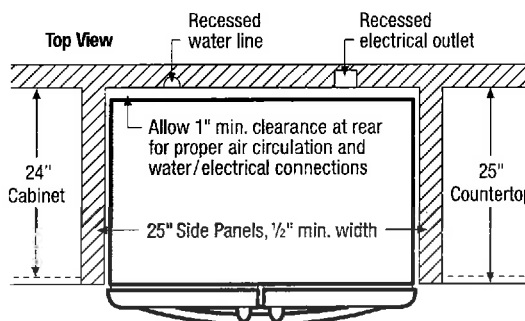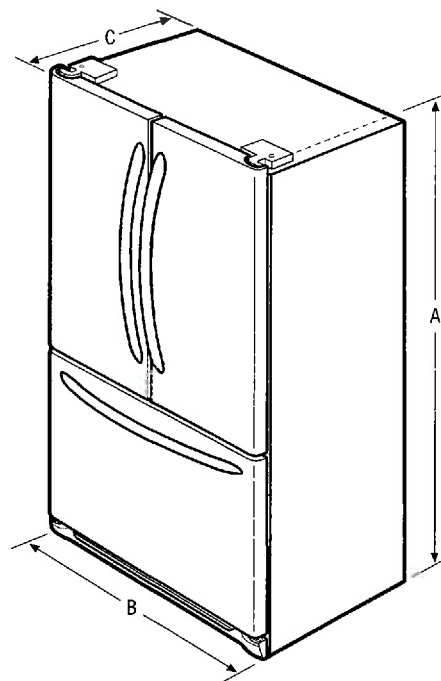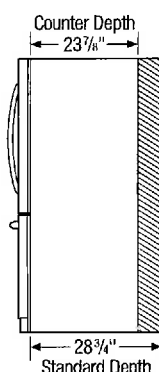

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions

A - Height (Incl. Hinges & Rollers)	69-7/8"
B - Cabinet Width / Door Width	35-7/8" / 36"
C - Depth (Incl. Door)	28-1/2"
Depth with Door Open 90°	42-1/2"
Depth with Drawer Fully Extended (Incl. Handle)	45-1/2"

"Built-In Look" Cutout Dimensions

Height (Incl. Hinges and Rollers)	70-1/4"
Width	36"
Depth	25"

Let 96 INN

Accessories information available on the web at frigidaire.ca