

PRODUCT MODEL NUMBERS

KRFC302E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Bottom Mount Refrigerator

PRODUCT DIMENSIONS


STANDARD FINISH

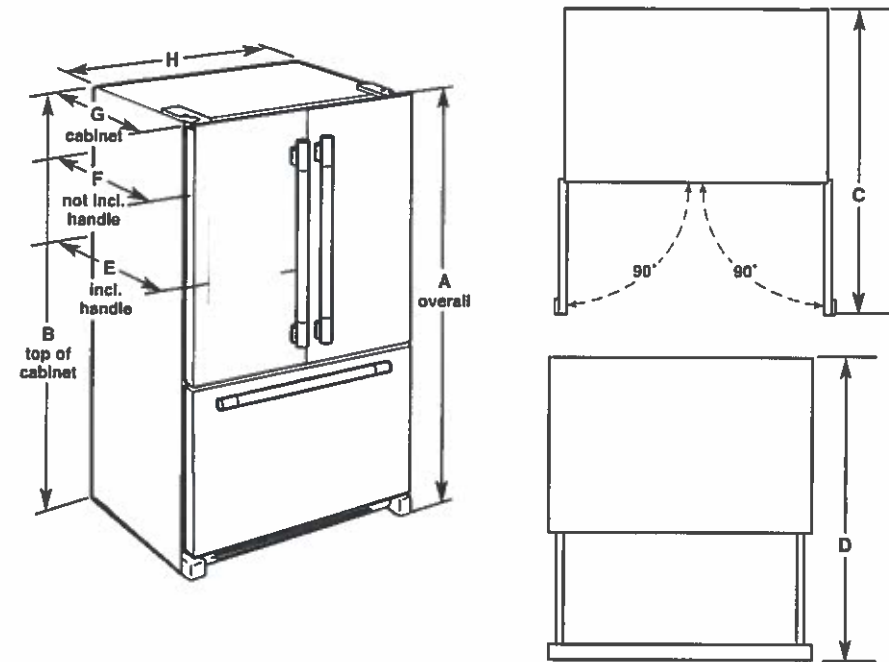

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
21.9	72" (182.9 cm)	71 1/8" (181.3 cm)	44 1/8" (112.1 cm)	45 1/4" (114.9 cm)	30 1/4" (76.8 cm)	27 3/4" (70.5 cm)	24 1/8" (62.5 cm)	35 3/4" (90.8 cm)

3-14 KING VILLAGE

LOCATION REQUIREMENTS

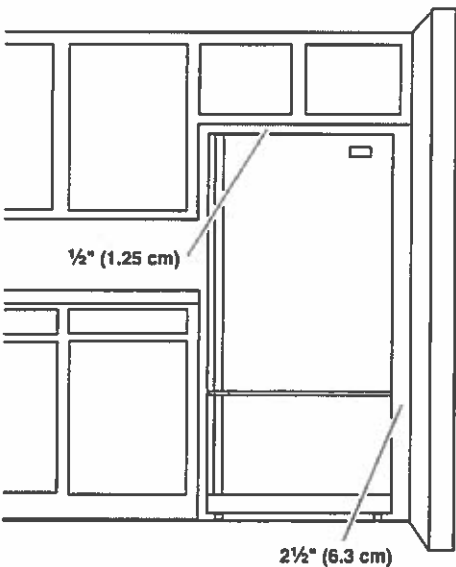

IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Cabinet Dimensions

STANDARD RANGE

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.



IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

Slide-In Cutout

Freestanding Cutout

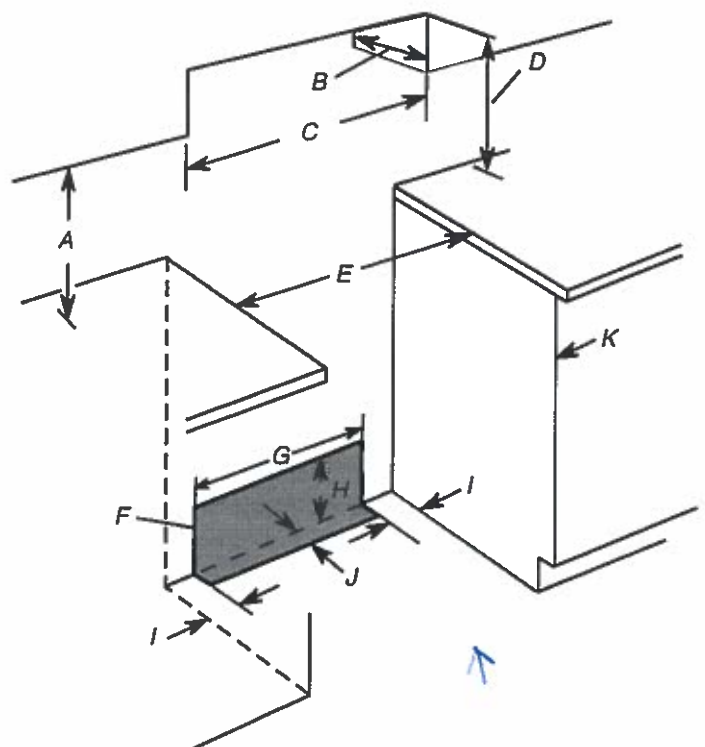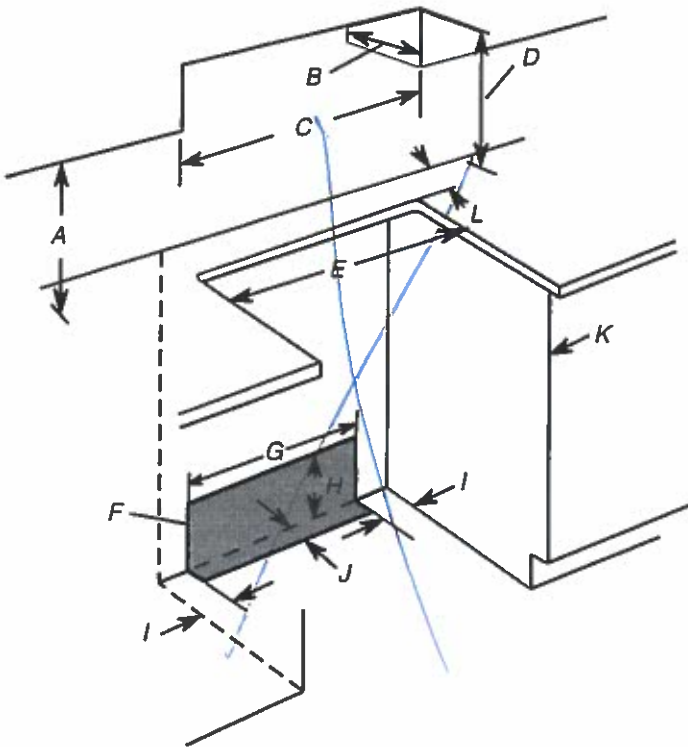

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/4" (19.5 cm)
- I. 4 1/8" (12.2 cm)
- J. 3 1/8" (9.4 cm) plus measurement of L
- K. Cabinet door or hinges should not extend into the cutout.
- L. Remaining counter depth should not exceed 2 1/4" (5.7 cm).

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- E. 30" (76.2 cm) min. opening width
- F. The shaded area is recommended for installation of grounded outlet.
- G. 13 1/8" (33.3 cm)
- H. 7 1/4" (19.5 cm)
- I. 4 1/8" (12.2 cm)
- J. 3 1/8" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.


***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.


3-14 KING VILLAGE

Product and Cabinet Opening Dimensions

STANDARD DISHWASHER

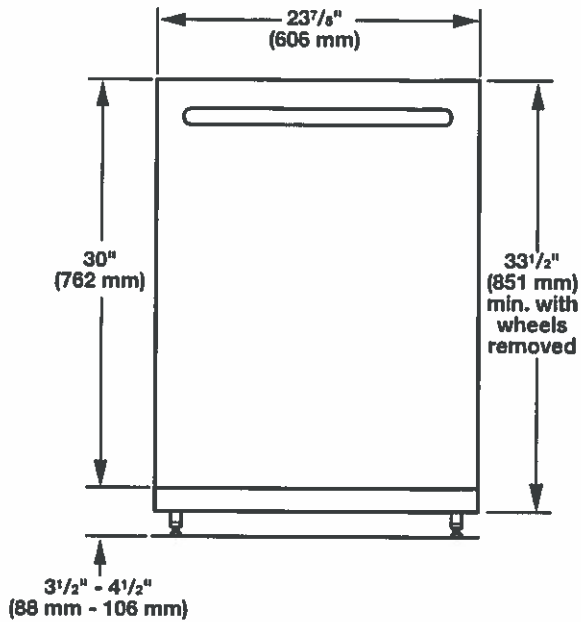


For 4" (100 mm) toe kick, height of cabinet opening is 34 ¹/₂" (863 mm).

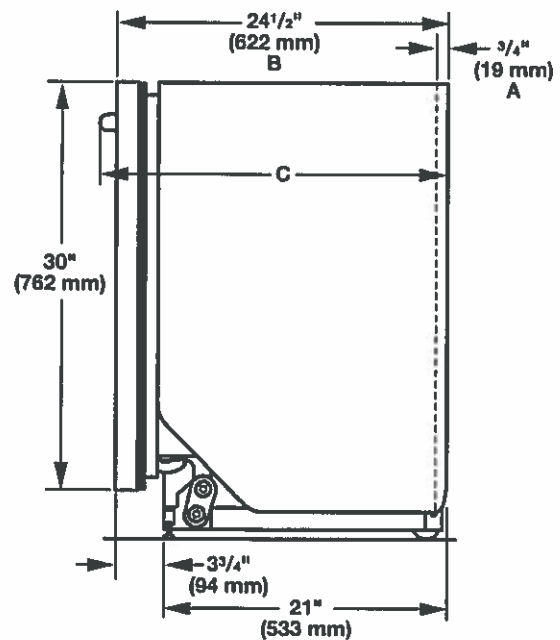


- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (610 mm), not including the 3/4" (19 mm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher, varies by model.

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

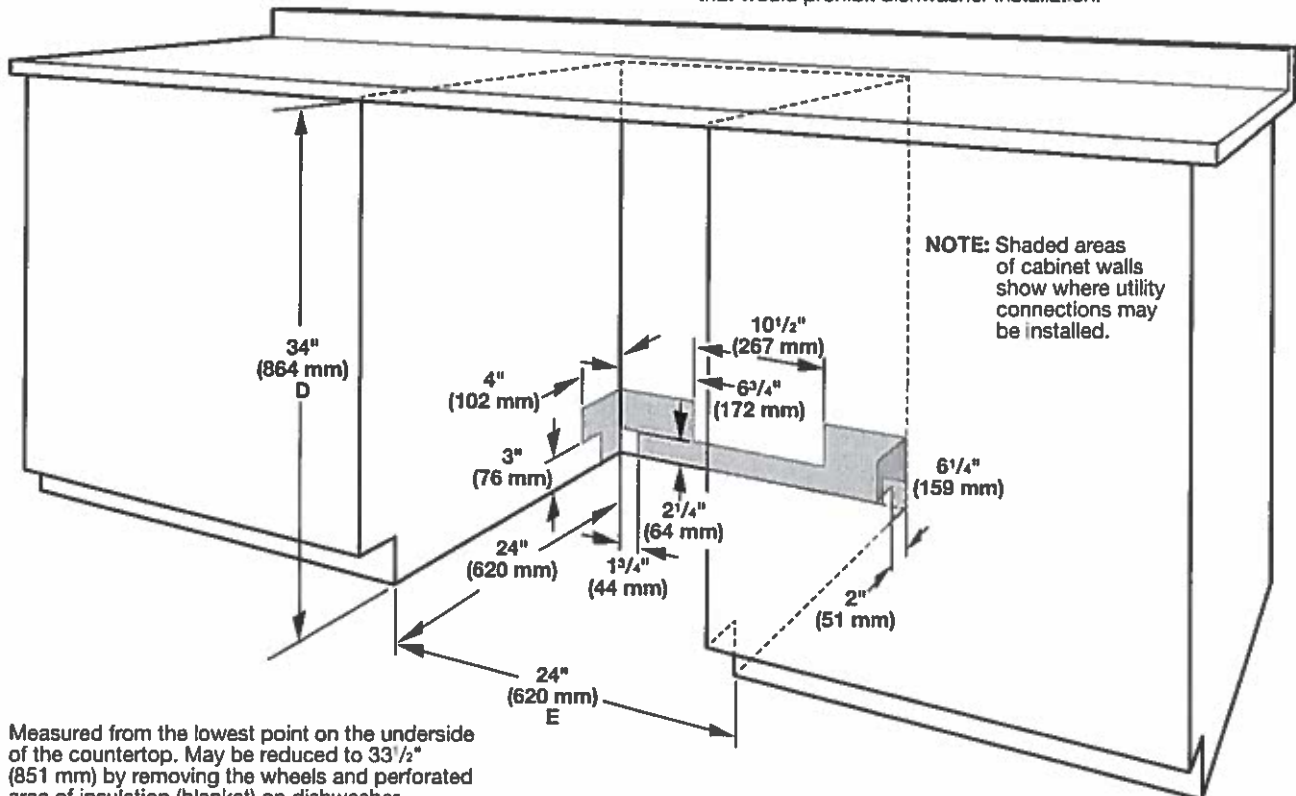

- D. Measured from the lowest point on the underside of the countertop. May be reduced to 33 ¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.
- E. Minimum, measured from narrowest point of opening


3-14 KING VILLAGE

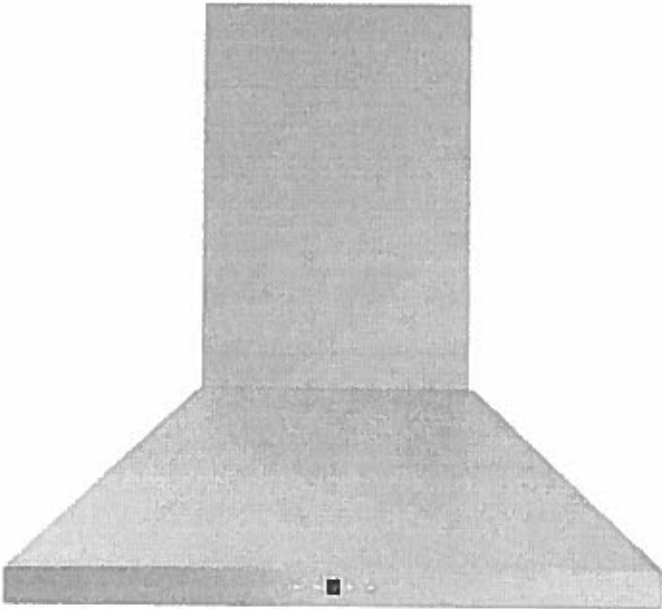


Model		AVO-308CS
Dimensions		29 1/2" (W) x 19 3/4" (D) x 10 1/4" (H)
Exterior Appearance		Stainless steel grade 201
Features		Control Soft touch with LED display
		Lighting 2 bulbs, 3W LED (bulbs included)
		Blower type 860 CFM, 6-Speed
		Blower performance Speed 1, 1.5 sones
		Speed 6, 5.0 sones
		Filter type 2 Stainless steel baffle filters (included)
		Duct transition 6" Round (Top)
		Ducting Ducted
Electrical Requirements		Electrical requirements 120V / 60Hz / 2.7 Amps
Warranty		1-year Warranty
		Parts and labour, in-home service

3-14 KING VILLAGE

Dimensions

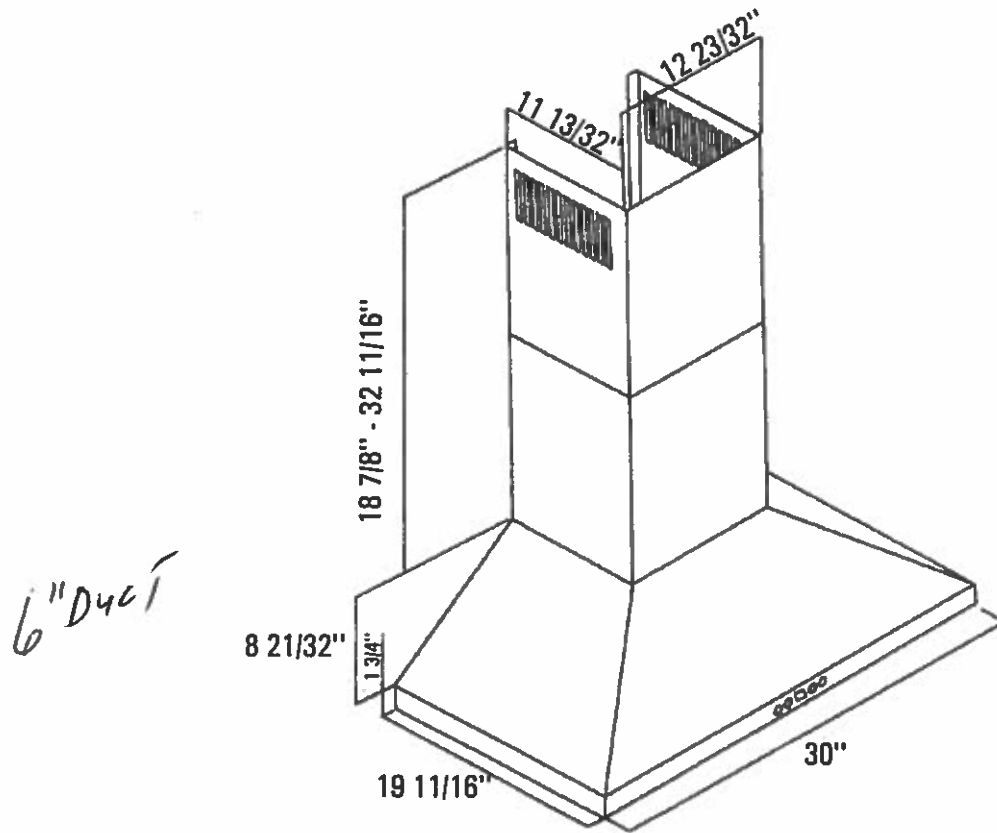

Installation

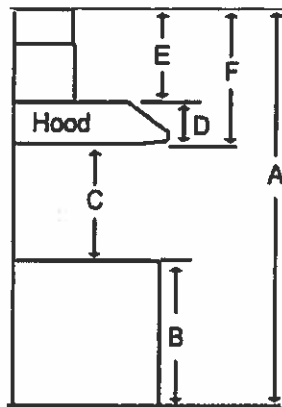


3-14 KING VILLAGE

A	Floor to ceiling Height	TBD
B	Floor to counter Top Height (standard)	36"
C	Recommended Height between cooking surface and bottom of the hood	26" min. - 30" max
D	Hood Height	28 5/16" to 43 3/32"
E	Cabinet Height	TBD

Duct transition

6" Round (Top)



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

ELECTRIC DRYERS

3-14 KING VILLAGE

DLEX7600KE

Performance

- 7.3 cu.ft. Mega Capacity with NeveRust™ Stainless Steel Drum

Intelligent Fabric Care

- TurboSteam™ Technology
- SteamFresh™ Cycle
- SteamSanitary™ Cycle
- ReduceStatic™ Option
- Sensor Dry System for Intelligent Fabric Care and Energy Efficiency
- Precise Temperature Control with Variable Heat Source
- 14 Drying Programs
- 5 Temperature Settings
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Custom Program

Style and Design

- EasyLoad™ Door
- Electronic Control Panel with LED Display and Dial-A-Cycle™
- Touch Buttons
- Chrome Edged Diamond Glass Door

Technology Benefits

- LoDecibel™ Quiet Operation
- NFC Tag On™
- SmartDiagnosis™
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator



Black Stainless Steel



Mega Capacity

Do laundry a little less often. With **7.3 cubic feet** of capacity, this dryer handles really large loads. Saving you time and energy.

EasyLoad™ Door

The dual-opening options of the **LG EasyLoad™** door make loading and unloading the dryer easier than ever. Transferring wet clothes from the washer? Simply press the release button and pull the door down, hamper style to keep that stray sock from hitting the floor. Removing dry items? Swing the door to the side to clear the way for your basket below. Even tight spaces and challenging laundry-room layouts are no match for versatility like this.

Steam Sanitary™ Cycle

Wash the unwashable. You probably wish you could clean your throw pillows or children's toys. With the **SteamSanitary™ Cycle**, you can. It uses steam to safely sanitize items marked as non-washable.

Accurate Drying

LG's **Sensor Dry System** measures the moisture levels during the cycle and automatically adjusts the drying time, assuring you get dry laundry every time.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

PRODUCT FEATURES

TYPE	
Front Loader	•
Design Lock	Rear Control
Intelligent Electronic Control with LED Display	•
Touch Buttons	•
Capacity	7.3 cu.ft.
DRYING PROGRAMS	
14 Programs	Cotton/Normal, Perm. Press/ Casual, Heavy Duty, Bulky Bedding, Delicates, Anti-Bacterial, Towels, Small Load, Sports Wear, Steam Fresh™, SteamSanitary™, Speed Dry, Air Dry, Download
9 Options	More Time, Less Time, Wrinkle Care, Custom Program, Child Lock, ReduceStatic™, EasyIron™, End of Cycle Signal, Energy Saver
5 Temperature Settings	High, Medium High, Medium, Low, Ultra Low
5 Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time
FABRIC CARE FEATURES	
SteamFresh™ Cycle	•
SteamSanitary™ Cycle	•
ReduceStatic™ Option	•
Sensor Dry	•
Precise Temperature Control and Variable Heater	•
CONVENIENCE FEATURES	
SmartDiagnosis™	•
FlowSense™ Duct Clogging Indicator	•
Anti-Bacterial Cycle	•
Wrinkle Care Option	•
Remaining Time Display/Status Indicators	•
End of Cycle Signal	•
Child Lock	•
Drum Light	•
NFC Tag On™	•
Reversible Door	•
Leveling Legs	4 Adjustable Legs
Venting Option	4 Way Venting
3 Minute Installation Check	•
LoDecibel™ Quiet Operation	•
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	Painted Steel
Control Panel	Plastic
Door/Rim	Glass & Chrome (Hairline) / Chrome
Available Colour	Black Stainless Steel
POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	240V, 30 Amps
DIMENSIONS	
Product (WxHxD)	27" x 45 7/16" x 28 15/16" (50 1/4" D with door open)
Carton (WxHxD)	29 1/2" x 48" x 31 1/4"
Weight (Product/Carton)	129.8 lbs / 149.6 lbs
UPC CODES	
DLEX7600KE	772454 067747
WARRANTY	
1 Year Parts and Labour	

3-14 KING VILLAGE



LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6

Tel: 647-253-6300 | LG.com

Customer Service & Parts

1-888-542-2623

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.
All trademarks are property of their respective owners.

Printed in June 2016

TOP LOAD WASHERS

3-14 KING VILLAGE

WT7600HKA

Performance

- Mega Capacity 6.0 cu.ft. with NeveRust™ Stainless Steel Drum (IEC)
- DirectDrive™ Motor for the Ultimate in Durability and Reliability with 10 Year Warranty
- 950 RPM Powerful Spin for Efficient Water Extraction

Intelligent Fabric Care


- TurboWash™ 2.0 Technology
- Steam Technology
- ASC Certified Allergiene™ Cycle
- NSF Certified Sanitary Cycle
- ColdWash™ Technology
- 6Motion™ Technology
- SmartRinse™ Jey Spray System
- SenseClean™ System for Intelligent Fabric Care
- 14 Washing Programs, 14 Options
- 5 Temperature Settings (All Cold Rinses)
- Delay Wash up to 19 hours for Washing Convenience

Style and Design

- Electronic Control Panel with LED Display and Dial-A-Cycle™
- Touch Buttons
- Chrome Edged Diamond Glass Lid
- SlamProof™ Lid

Technology Benefits

- NFC Tag On™
- LoDecibel™ Quiet Operation
- Highly Energy and Water Efficient
- SmartDiagnosis™ 3.0
- TrueBalance™ Anti-Vibration System

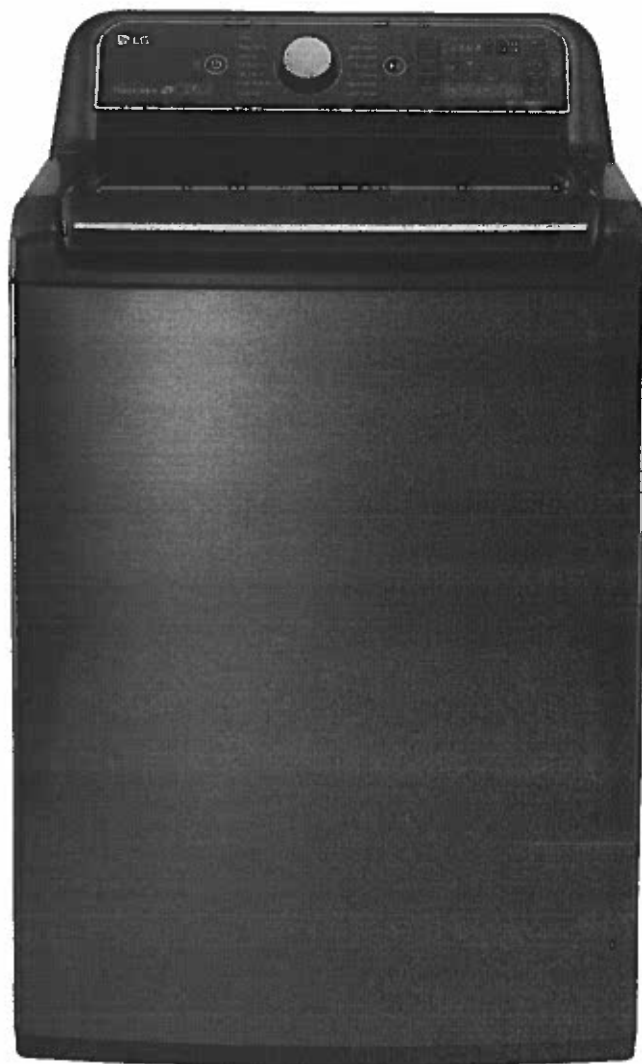

Black Stainless Steel



Mega Capacity

When it comes to laundry capacity, big is good, but bigger is better. Now you can wash a king size comforter and full set of bedding in a single load! At 6.0 cu.ft. of MEGA capacity, you'll definitely have room to clean.

Fast Forward your Laundry

Tired of spending hours on end finishing your family's laundry? Now, those days are gone. LG's revolutionary TurboWash™ 2.0 Technology allows you to save up to 30 mins per load, with outstanding cleaning performance! It's like pressing the fast forward button on your laundry.

Deep Clean with Steam

LG's Steam Technology penetrate fabric to remove soil and enhance cleaning results, it also removes common household allergens. The Allergiene™ cycle gently removes over 95% of common household allergens, like dust mites and pet dander from even the most delicate fabrics. It's so effective it's certified by the Asthma Society of Canada (ASC).

Catch the Wave

LG WaveForce™ uses rapid drum movement and powerful water jets to provide outstanding washing and rinsing performance, while staying gentle on clothes.

Count On It

When you buy a washer, you don't want to worry that it won't last. Because the DirectDrive™ Motor uses fewer moving parts and operates more efficiently, LG confidently backs the motor with a 10-year warranty.

Call, Connect, Resolve

SmartDiagnosis™ uses self-diagnosing technology that can communicate 24/7 with LG customer service over the telephone providing you with comfort and reliability.

3-14 KING VILLAGE

PRODUCT FEATURES

TYPE	
Top Loader	•
Design Lock	Rear Control
Intelligent Electronic Controls with Dual LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
Capacity	IEC 6.0 cu.ft.
ENERGY	
Energy Star	•
CEE Tier	1
WASH PROGRAMS	
14 Programs	Cotton/Normal, Bulky/Large, Perm. Press/Casual, Speed Wash, Heavy Duty, Bright Whites™, Towels Allergiene™, Waterproof, Download, Sanitary, Delicates, Tub Clean, Pre Wash + Normal
14 Options	PGM Save, Rinse+Spin, Spin Only, StainCare™, Soak, ColdWash™, Extra Rinse, Fabric Softener, Delay Wash, Child Lock, Custom Program, Signal On/Off, Water Plus, Add Garments
5 Wash/Rinse Temperatures	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)
5 Spin Speeds	Extra High (950 max), High, Medium, Low, No Spin
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	3
FABRIC CARE FEATURES	
TurboWash™ Technology	•
Steam Technology	•
Allergiene™ Cycle	•
Sanitary Cycle	•
WaveForce™ Technology	•
ColdWash™	•
SmartRinse™ Jet Spray System	•
SenseClean™ System	•

CONVENIENCE FEATURES	
2 + 1 Dispenser	Main Wash, Fabric Softener + Liquid Bleach
TrueBalance™ Anti-Vibration System	•
SmartDiagnosis™	•
SlamPoof™ Lid	•
Load Sense	•
Status Indicator(s)	•
End of Cycle Signal	•
Child Lock	•
Auto Suds Removal	•
Forced Drain System	•
Internal Water Heater	•
Leveling Legs	4 Adjustable Legs
LoDecibel™ Quiet Operation	•
MOTOR AND AGITATOR	
Motor Type / Motor Speed / Axis	Inverter Direct Drive / Variable / Vertical
Max RPM	950
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Cover	Painted
Diamond Glass Lid	Dark Gray Tint
Available Colour	Black Stainless Steel (HKA)
POWER SOURCE	
Ratings / Electrical Requirements / Type	CSA Listed / 120V, 60Hz, 10 Amps/Electric
DIMENSIONS	
Product (WxHxD)	27" x 44 1/2" x 28 3/8" (57 1/5" D with door open)
Carton (WxHxD)	29 1/2" x 47" x 31 1/4"
Weight (Product/Carton)	146.9 lbs/162.3 lbs
UPC CODES	
WT7600HKA	772454067778
WARRANTY	
1 Year Parts and Labour	
5 Years Part on Drum	
10 Years Part on DirectDrive™ Motor	



LG ELECTRONICS CANADA INC.

20 Norelco Drive, North York, Ontario M9L 2X6

Tel: 647-253-6300 | LG.com

Customer Service & Parts

1-888-542-2623

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.
All trademarks are property of their respective owners.

Printed in June 2016