

DD24DDFTX9_N

Double DishDrawer™, 14 Place Settings, Sanitize (Tall)

Contemporary

This Fisher & Paykel DishDrawer™ Dishwasher allows you to wash one drawer and stack the other or wash both at once using different programs.

EZKleen Stainless Steel

A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W www.fisherpaykel.com



Dimensions

Depth	22 9/16"
Height	34 - 36 3/8"
Width	23 9/16"

Features & Benefits

Ease of use
DishDrawer™ Dishwashers are as easy to open and close as kitchen drawers and can be conveniently positioned at bench height for ease of loading and minimal bending. Flexible racking allows you to make adjustments to fit in a variety of dishes.

Independent wash
With the ability to use both drawers independently and select different wash programs the DishDrawer™ Dishwasher can wash everything from fine glass and crystal to heavily soiled pots and pans.

True half load
Each drawer holds a true half load for guilt-free small washes and fast turnaround of your dishes. Both drawers operate independently so different wash cycles can operate simultaneously to accommodate a variety of loads.

Designed to match
DishDrawer™ Dishwashers are designed to match the Fisher & Paykel family of kitchen appliances, with matching handles, premium styling and quality materials for a stylish finish in your kitchen.

Quick, Sanitize and Extra Dry options
The Quick wash modifier delivers a faster wash while maintaining performance. The Sanitize option provides extra protection killing 99.9% of bacteria in the final rinse. The Extra Dry setting is perfect for plastic dishes.

Specifications

Quiet performer
Running at a very low decibel rating, these DishDrawer™ Dishwashers do their job without making a fuss. The combination of intelligent technology and simple mechanics means greater reliability and excellent wash performance.

Accessories
Cutlery basket
Kick strip
Knife clip & Multipurpose clip

Capacity and loading
Accommodates round plates up to 12.25" (top) - 11" (bottom)
Fixed height, foldable cupracks

Fold down tines
Pitch adjustable tines
Place settings 14

Control
Child lock
Electronic fault/Diagnostic indicator
End of cycle beeps
Energy saving delay start option up to 12 hrs
Internal wash selector
Rinse aid indicator light

FISHER & PAYKEL

bbw

1 of 21

Features		Performance		Power requirements		Style And Series		Warranty	
Fan assisted drying	•	SmartDrive™ technology	•	Energy star	•	AMP draw	9.6 A	15 A	60 Hz
Flow through detergent dispenser	•	Quiet operation	•	Energy usage	263 kWh/year	Supply voltage	120 V	3	Contemporary
	•		•	Water usage	3.28 gal running both tubs	Wire			
	•		•	Noise (dBA) on delicate cycle top drawer	44				
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						
	•		•						

663

2 of 21

Wall Range Hood, 36", Box Chimney

Series 7 | Contemporary
Stainless Steel and Glass




- The wall chimney range hood has contemporary styling, extracting steam, grease and cooking odors quietly and efficiently.
- With four fan speeds, select the perfect extraction rate for your cooking
 - Energy-efficient LED lighting to illuminate your cooking surface
 - Powerful 600CFM maximum airflow

Height
Width
Depth



23 3/4 - 41 1/16"
35 3/8"
19 11/16"

DIMENSIONS

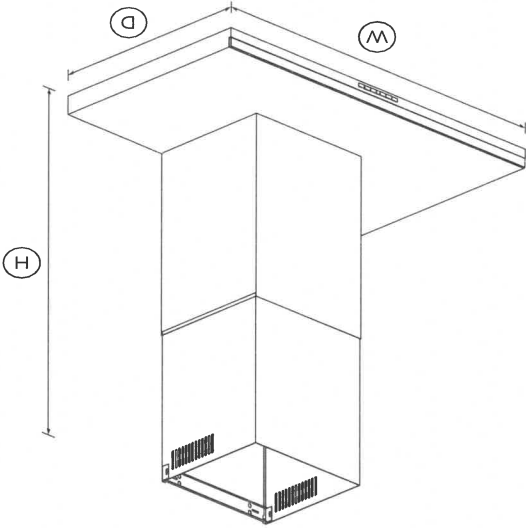

FEATURES & BENEFITS

Quiet and effective
This vent hood features four fan speeds providing powerful extraction to quickly remove odours and steam. As odors can linger in the kitchen well after cooking is finished, the timer keeps the vent hood working for up to 15 minutes before automatically turning off.

Simple controls
This Fisher & Paykel chimney range hood features a sleek and easy to use soft-touch control panel. This range hood's LED

lights provide bright, warm, energy efficient lighting ensuring the entire cooktop surface is illuminated.

Easy cleaning

The black glass and stainless steel finish is easily wiped clean. Multi-layered, dishwasher safe filters trap grease effectively and can easily be removed for cleaning.

Complementary Design

This wall chimney vent hood's sleek stainless steel finish will complement any contemporary kitchen and is designed to match the rest of Fisher & Paykel's kitchen appliance family.

SPECIFICATIONS

Accessories	
Chimney extension	791774
Light bulb	792579
Recirculation carbon filter	791772
Recirculation diverter	792580
Fan ratings	
Maximum sound rating	67dBA
Speed 3 sound rating	63dBA

Installation and cleaning

Air outlet size	6"
Dishwasher safe filters	3
Ducted	Top extraction
Recirculation	Optional - top extraction

Performance

Surface

21 of 3 66W

Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Fan speeds	4
Filter type	Mesh
Number of filters	3
Power requirements	
Rated current	5.2A
Supply frequency	60Hz
Supply voltage	120V
Total Power	542W
Product dimensions	
Depth	19 11/16"
Height	23 3/4 - 41 1/16"
Width	35 3/8"
Product information	
Control type	Soft-touch
Ventilation features	LED
Warranty	Parts and labor 2 years
SKU	50084

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher &

Other product downloads available at fisherpaykel.com

↑ Data Sheet Wall Range Hood

A PEACE OF MIND SALE

24/7

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 www.fisherpaykel.com

4 of 21

66W

*Dual Fuel Range, 36", 5 Burners, Self-cleaning

- Get the best of both worlds with dual fuel. A gas cooktop with powerful burners is paired with a large convection oven with nine functions.
- Five burner gas cooktop, including one dual ring and two triple ring wok burners
- Convection oven with 4.9 cu.ft total capacity, nine oven functions including Roast, Aero Pastry™ with pizza mode and rapid proof for making bread
- Non-tip full-extension shelves for safe removal of hot dishes




Series 9 | Contemporary
Stainless Steel

- High-temperature self-cleaning function breaks down food residue for an easy clean

DIMENSIONS

Height	35 3⁄4" - 37 1⁄4"
Width	35 7⁄8"
Depth	25 1⁄4"

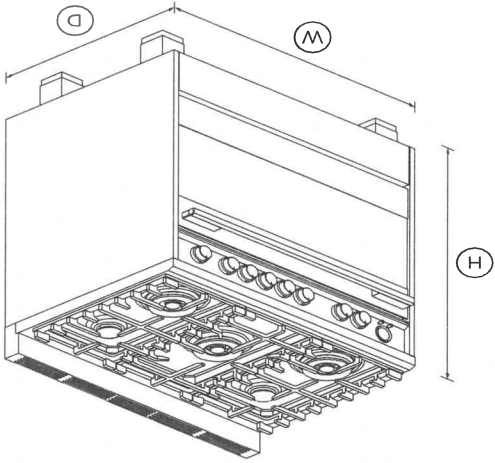

FEATURES & BENEFITS

Multi-shelf cooking
Our AeroTech™ system circulates air evenly throughout the entire oven so dishes on the top shelf turn out just as perfect as food cooking on the bottom shelf.

Quality and durability
Every detail has been carefully crafted. The solid, perfectly

balanced soft-close door, durable cooktop trivets and machined stainless dials all add up to an exceptional, premium range.

Easy to clean

Cleaning up spills is effortless. Your cooktop simply needs a quick wipe to keep it looking good as new. The self-clean function breaks down food residue at a very high temperature, leaving a light ash that's easily removed with a damp cloth.

Burner power & control
Instant and immediate control from the highest to the gentlest heat. The finely tuned cooktop controls let you sear, stir fry or simmer a delicate sauce to perfection.

Large capacity oven
The generous 4.9 cu.ft total capacity oven gives you plenty of space to cook multiple dishes at once, with enough room to fit a 32 lb turkey.

Even heat
Accurate, electronically-controlled oven heat ensures a great result every time.

SPECIFICATIONS

Accessories	
•	2-pc grill system (Broil pan and
•	Broil pan
•	Broil rack
3 1/8" (part 81654)	Hob rear trim (optional)
Part 81659	Kick strip, stainless steel
1 (part 533981 cast)	Small pot support
1 (part 534678)	Wok stand
Capacity	
7	Shelf positions
4.9 cu ft	Total capacity

Cleaning		Acid resistant graphite enamel		•	Drop down grill element	•	Flat easy clean glass surface	•	Pyrolytic proof shelf runners	•	Pyrolytic self-clean	•	Removable oven door	•	Removable shelf runners	•																			
Controls		Audio feedback			Automatic cooking/minute		•		Automatic pre-set		•		Celsius/Fahrenheit		•		Electronic clock	•	High resolution display	•	Interior light	•	Laser etched graphics	•	Precise electronic temperature	•	Sabbath mode	•	Turned stainless steel clock	•	Turned stainless steel clock	•	Turned stainless steel dials	•	
Gas requirements		Supply Pressure (LPG)			11" W.C.P		Combined warming/Storage		220W		Semi-rapid burner (LPG) x2		1500 - 8000BTU		Number of burner elements		5	Number of burners		5															
Oven features		AeroTech™ technology		•	Automatic rapid pre-heat	•	Concealed element	•	Electronic oven control	•	2 sets (part 578744)		4 x 25W halogen (2 side & 2		•	Pyrolytic proof shelf runners	•	Self-cleaning	•	Soft open/close door	•	True convection	•	Twin cavity fans	•	Warming drawer	•	220W							
Product dimensions		Depth			25 1/4"		Height		35 3/4"-37 1/4"		Installation cutout dimensions		25 1/4"	Installation cutout dimensions		36"		Width		35 7/8"															
Power requirements		Amperage			30A		Supply frequency		60HZ		Supply voltage		208 - 240V																						
Rangetop features		Brass burner spreader (power			•		Dishwasher safe trivets		•		Embossed brass burner cap	•	Hob rear trim	3		LPG/Natural gas compatible		•		Sealed range top		•													
Rangetop Performance		Dual wok burner inner/outer					1000 - 18000BTU				Dual wok burner inner/outer		1000 - 18000BTU			Max burner power				18000BTU															
		Number of burner elements					5				Number of burners		5																						
		Semi-rapid burner (LPG) x2					1500 - 8000BTU				Semi-rapid burner (natural		1500 - 8000BTU																						
		Total cooktop power					62000BTU																												
		CoolTouch door			Warming drawer power		Quadtriple glazed		220W																										

Triple ring wok burner (LPG) 6100 - 1400BТУ
Triple ring wok burner (natural) 6100 - 1400BТУ

Safety

- Advanced cooling system
- Anti-tilt bracket
- Balanced oven door
- Catalytic venting system
- Full extension telescopic
- Non-tip shelves
- Spill containment
- 5/8 gallon

Warranty

Parts and labor 2 years

SKU 81305

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- User Guide
- Service & Warranty Booklet
- Guide D'Utilisation
- Installation Guide

A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

24/7

T 1.888.936.7872 Wwww.fisherpaykel.com

7 of 21
66M

Freestanding Quad Door Refrigerator Freezer, 36", 18.9 cu ft, Ice & Water

Series 7 | Contemporary

Stainless Steel | French hinge



- With brilliant LED lighting and three independent compartments including a Variable Temperature Zone, for truly flexible storage.
- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature.
 - Door water dispenser and internal ice maker with boost function


- Variable Temperature Zone lets you change a compartment to Fridge, Chill, Soft Freeze or Freezer for optimal storage

Height
Width
Depth

70 1/2 "
35 5/8 "
27 1/16 "

DIMENSIONS

- Spacious bottom freezer with full extension drawer gives easy access to frozen goods

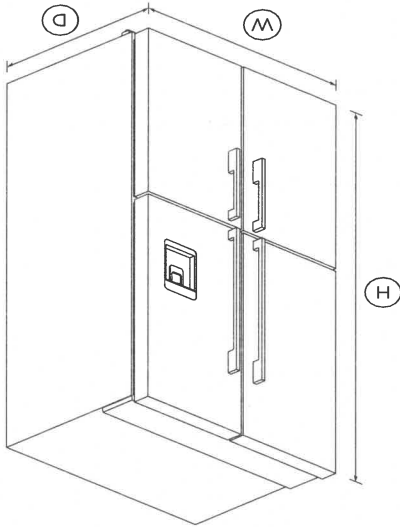

FEATURES & BENEFITS

Variable Temperature Zone

At the touch of a button, easily convert the lower right compartment to suit different food types, giving you storage flexibility for everyday needs as well as special occasions. Choose from Freezer, Soft Freeze, Chill and Fridge modes.

Flexible storage

ActiveSmart™ Foodcare

Three large, independent compartments provide ample storage space. Easily adjustable cantilevered shelving in the fridge and full extension bins in the freezer provide maximum storage flexibility. A Variable Temperature Zone in the lower right compartment provides true freezer temperature of -0.4°F.

ActiveSmart™ Foodcare learns how you live. It is technology which understands how you use your fridge and adjusts temperature, airflow and humidity inside to help keep food fresher for longer.

Ultra slim water dispenser

The slimline water dispenser is easy to use. The angled water delivery means that almost any size or shape of vessel can be filled. The slimline design maximizes storage space inside the door.

Ice maker

The internal ice maker delivers fresh ice to a dedicated freezer bin. Simply turn it off to free up freezer space or during busy times boost ice production by up to 30%.

Design quality

Our refrigerators are built using quality materials. We use real stainless steel, and solid glass for the interior shelving. Thoughtfully designed bins feature smooth, fully extendable telescopic runners for full access to storage space.

Easy one-touch control panel

Control panels for the refrigerator and freezer are conveniently located inside the their respective compartments, allowing you to view and modify the features and options to suit any occasion. The Variable Temperature Zone control is on the top of the compartment door so you can easily select your desired food mode or adjust manually.

SPECIFICATIONS

Accessories (sold separately)

FISHER & PAYKEL

8 of 21 66W

Replacement water filter		Part number 847200	
Depth (excluding handles)		27 1/16"	
Height		70 1/2"	
Height to top of cabinet		69 7/8"	
Minimum air clearance - at rear		1 3/16"	
Minimum air clearance - each		13 1/16"	
Minimum air clearance - on top		13 1/16"	
Width		35 5/8"	
Refrigerator features		6	
Adjustable door shelves		2	
Covered door shelves		.	
Door alarm		.	
Front levelling feet		.	
Fruit and vegetable bins		2	
Full extension runners		.	
LED lighting		.	
Rear rollers		.	
SmartTouch control panel		.	
Split level cantilevered shelves		2	
Stackable bottle holders		4	
Ultra slim water dispenser		.	
Warranty		2 years	
Parts and labour		5 years	
Sealed system parts only		24891	
SKU		24891	
Product dimensions		27 1/16"	

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

21 of 9 pages

Other product downloads available at fisherpaykel.com

- User Guide
- Service & Warranty Booklet
- Guide D'Utilisation
- Installation Guide
- Guide D'Installation
- Resources (zip)


24/7

A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 www.fisherpaykel.com

12 of 21
ppw

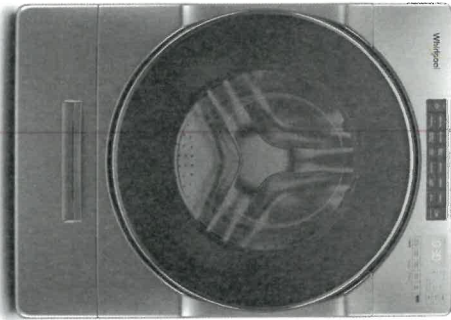

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer
with Load & Go™ XL Dispenser

WFW6620HC

Available Finishes/Colours

☒ WFW6620HC
Chrome Shadow

☐ WFW6620HW
White

Dimensions

Depth	31 9/16
Width	27

Controls

LCD Touch Screen	No
LED Color	Blue

Exterior

Lid/Door Lock	Yes
Lid/Door Swing	Left
Window	Yes

Compatibility

Works With	No
------------	----

Details

Advanced Vibration Control™ No

Automated Dispenser Load&Go™

Automatic Load Size Sensing Technology Yes

Dispense System Detergent, Fabric Softener & Bleach

Internal Heater Yes

Top Features

Load & Go™ XL Dispenser

#1 in Customer Satisfaction in the J.D. Power 2020 Laundry Appliances Satisfaction Study

5.2 cu. ft. I.E.C. Capacity

Skip adding detergent to every load with a Whirlpool® closet-depth front load washing machine. The Load & Go™ XL dispenser holds enough laundry soap for 40 loads and automatically adds the right amount. Intuitive Controls let you create customized washing machine cycles, and the ENERGY STAR® certified front load washer will even help you save on your utility bills.

Manuals & Literature:

  Dimension Guide

  Installation Guide

  Warranty Information

  Energy Guide

  Use and Care Guide



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

66W 11 of 21



WFW6620HC
WFW6620HW
WFC682CLW

Dimension Guide

Whirlpool® Front Load Washer /
All-In-One with Load & Go™
XL Dispenser



W11466163B


66M

12 of 21

DETAILED PLANNING DIMENSIONS


WARNING: To reduce the risk of re, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

Electrical Requirements	
WFW6620HC WFW6620HW WFC682CLW	4.5 cu ft DOE (US)/5.2 cu ft IEC (CAN)
Minimum Circuit Amperage Rating	15 A
Maximum Ampere Draw	10.36 A
Operating Voltage	120 V AC only
Operating Frequency	60 Hz

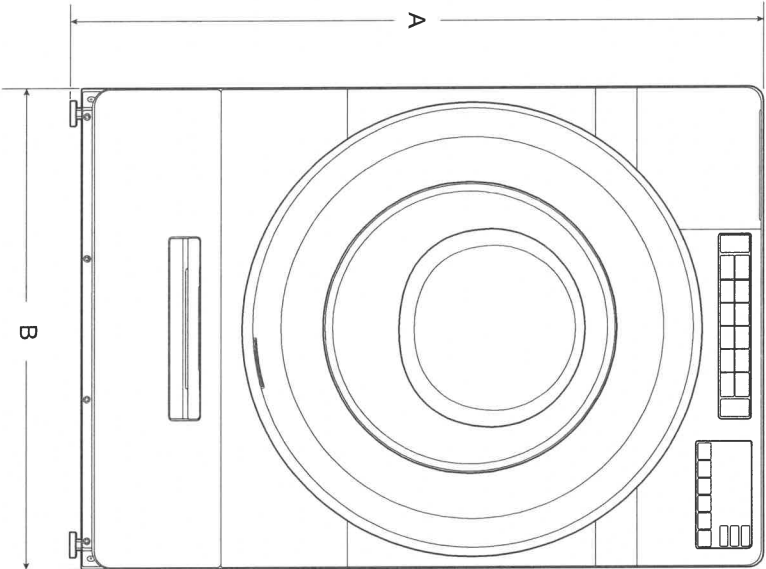


Product Dimensions					
		WFW6620HC, WFW6620HW, WFC682CLW			
A	Height (with feet)	in (minimum)	mm (minimum)	in (maximum)	mm (maximum)
B	Product Width	27	686	-	-

DETAILED PLANNING DIMENSIONS

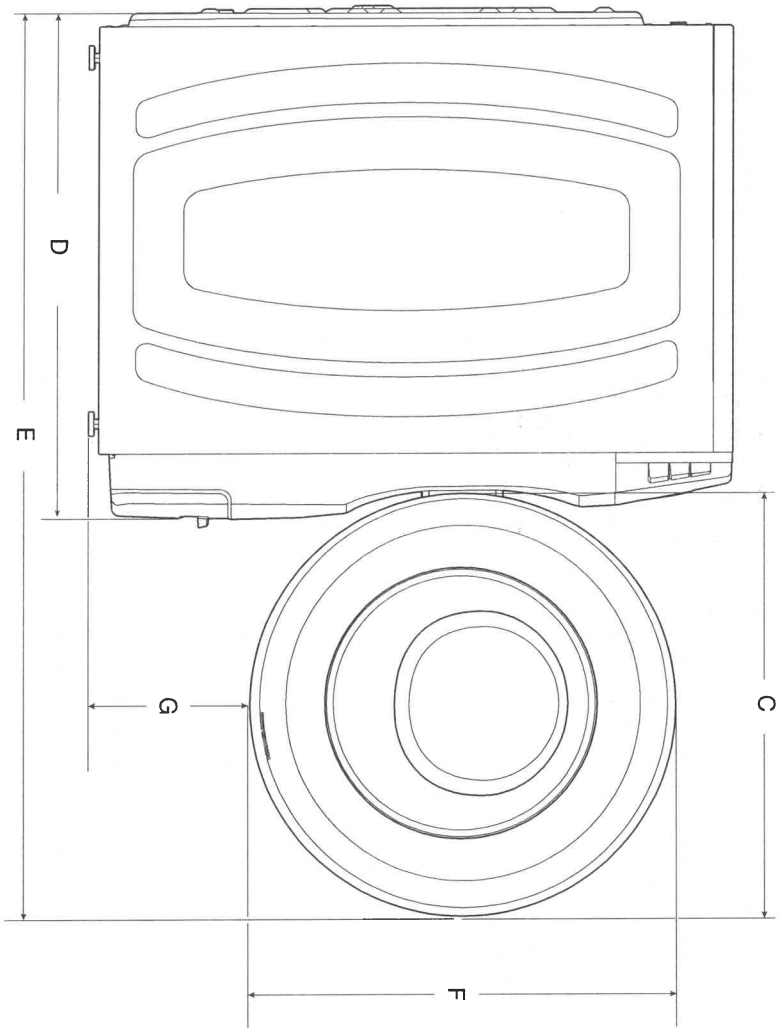

Product Dimensions					
WFW6620HC, WFW6620HW, WFC682CLW					
		in (minimum)	mm (minimum)	in (maximum)	mm (maximum)
C	Door Width	25 ¹ / ₆	652	-	-
D	Product Depth	31 ³ / ₆	802	-	-
E	Product Depth with Door Open	54 ⁷ / ₈	1393	-	-
F	Door Height	25 ¹ / ₆	652	-	-
G	Height to Bottom of Door	9 ¹ / ₂	241	-	-

DETAILED PLANNING DIMENSIONS

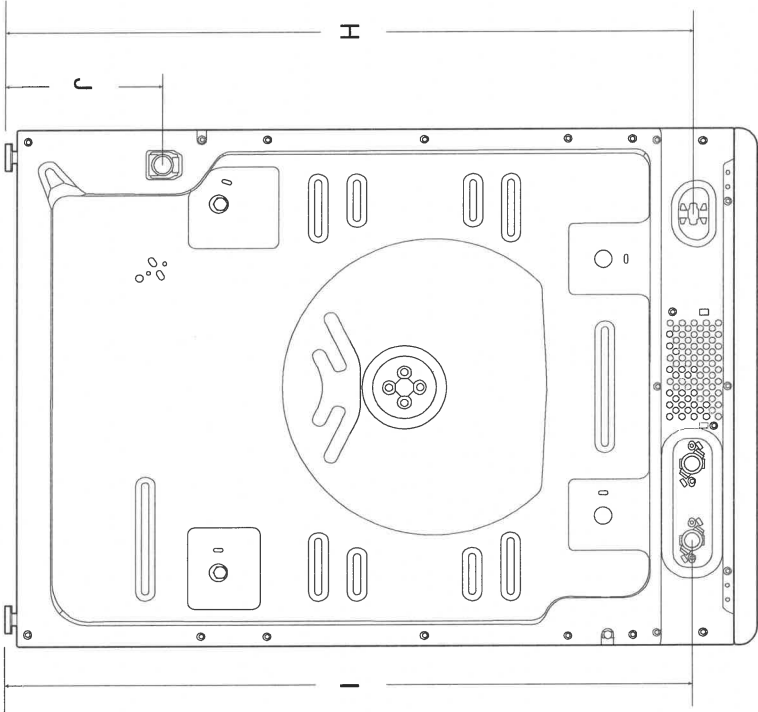


Product Dimensions				
WFW6620HC, WFW6620HW, WFC682CLW				
		in (minimum)	mm (minimum)	
H	Position of Power Cord	35 ⁵ / ₁₆	897	-
	Power Cord Length	72	1830	-
I	Position of Water Inlet Valves	35 ⁵ / ₁₆	897	-
J	Position of Drain Hose	8	205	-
	Drain Hose Length	52	1321	-
	Diameter of Drain Hose	1	26	-

DETAILED PLANNING DIMENSIONS


All Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing; and spacing for companion appliances and clearances for walls, doors, and door moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

*For additional details (or information) specific to your model, refer to your Quick Start Guide.

Custom under counter installation

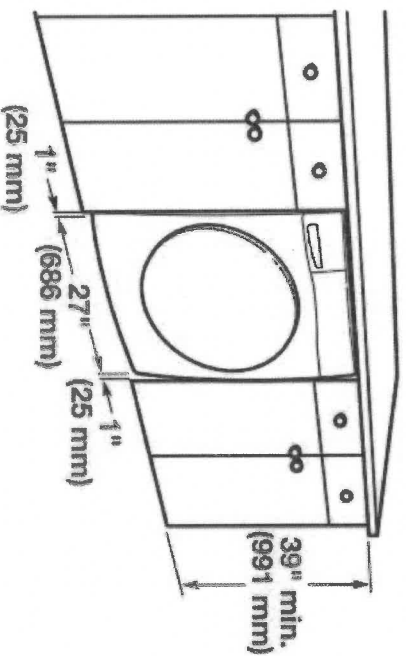

Recessed area or closet installation

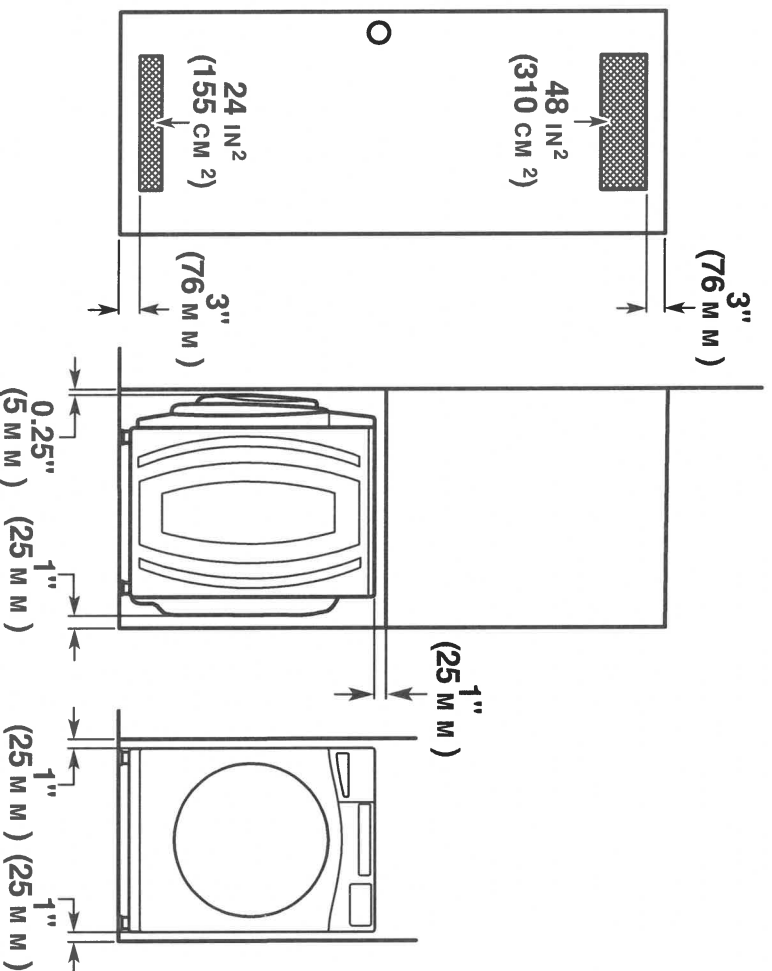

66W 16 of 21

Prepared by
Wayne Wanamaker
wwwanamaker@coastappliances.com




7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

YWED6620HC

Available Finishes/Colours

☒ YWED6620HC
Chrome Shadow

☐ YWED6620HW
White

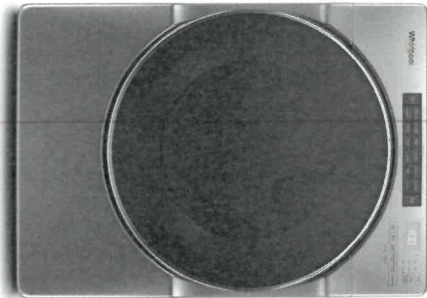

Dimensions	
Depth	31
Height	38 3/4
Width	27
Controls	
Electronic Display Type	Cycle Indicator Lights
Feedback-Status Indicators	Check Vent, Cool Down, Damp, Sensing, V

Details	
Door Style	Side Swing
Maytag Commercial Components	No
Drum Material	Powder Coat
Drying Rack	No
Interior Light	No
Lint Screen Location	Front
Quad Baffles	Yes
End of Cycle Signal	Yes
Control Type	Electronic Touch

Features	
Lint Filter Indicator	No
Automatic Dry Control	Yes
Moisture Sensor	Yes
Cycle Time Remaining	Yes
EcoBoost™/Energy Saver	Yes

Give your family's clothes the care they deserve with a front load electric dryer with the Wrinkle Shield™ Plus option with Steam. Advanced Moisture Sensing helps prevent overdrying by using three moisture sensors to end the cycle at just the right time. The ENERGY STAR® certified electric dryer even includes a Static Reduce option to help decrease static after drying.

Top Features

Steam Refresh Cycle

7.4 cu. ft. Capacity

Wrinkle Shield™ Plus Option with Steam

Manuals & Literature:

- Dimension Guide
- Energy Guide
- Installation Guide
- Use and Care Guide
- Warranty Information

Exterior	
Window	Yes
Door Opening	Right
Reversible Door	Yes
Controls	
Control Location	Front



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

66W 17 of 21



Dimension Guide
Whirlpool® Dryer with
Steam Cycles - 7.4 cu. ft.

White


Available

YWED6620HW - Electric
WED6620HW - Electric
WGD6620HW - Gas

Chrome Shadow

Available

YWED6620HC - Electric
WED6620HC - Electric
WGD6620HC - Gas

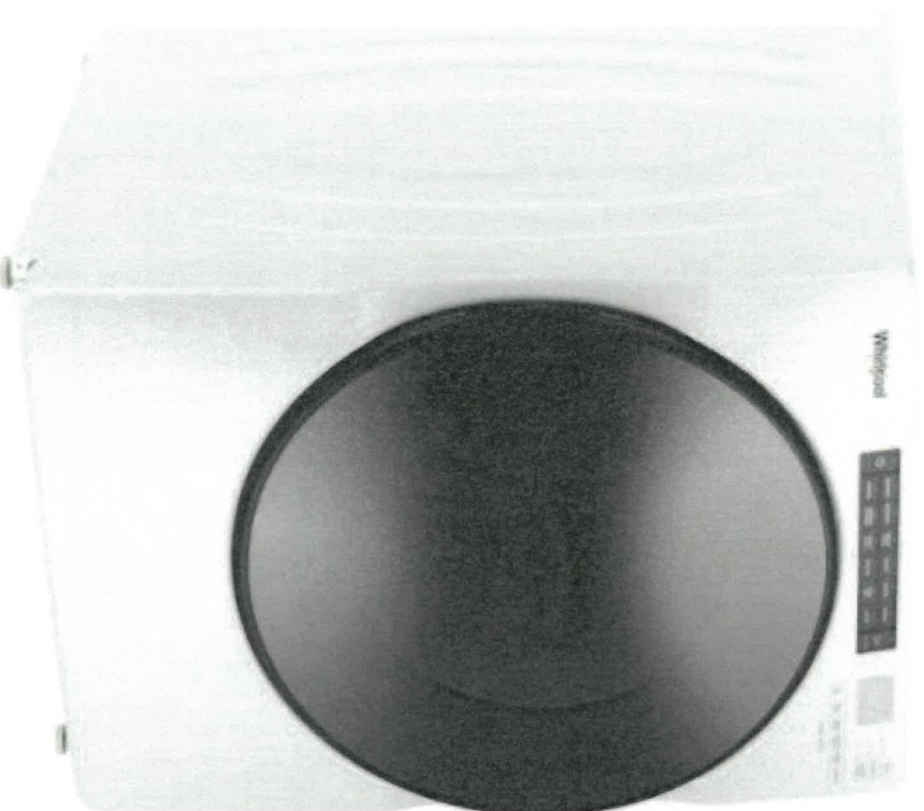


W11462159A

66W 18 of 21

DETAILED PLANNING DIMENSIONS

WARNING: To reduce the risk of re, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.


Electrical Requirements			
Fuel Type	Electric		Gas
Minimum Circuit Amperage Rating	30 A		15 A
Maximum AMP Draw	24 A		6 A
Operating Voltage	240 V AC only 230 V AC only (Canada)		120 V AC only
Operating Frequency	60 Hz		

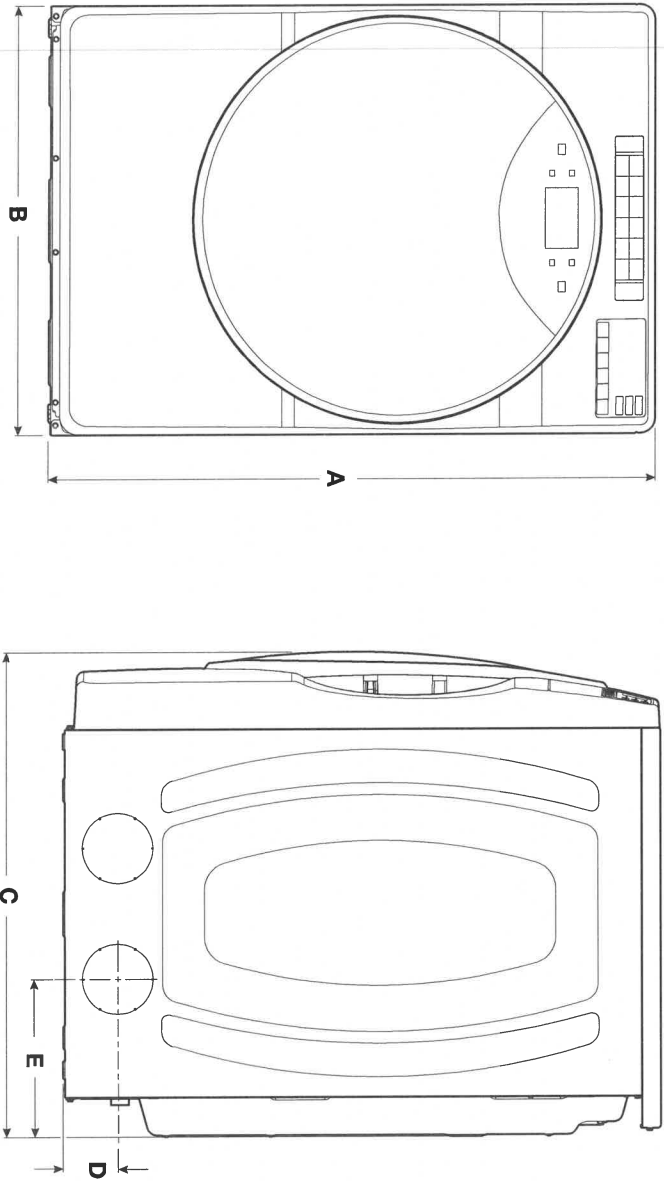

Product Dimensions					
		in (min)	in (max)	mm (min)	mm (max)
A	Height (with feet)	38 1/8	39	968	989
B	Width	27	-	686	-
C	Depth	31	-	787	-
D	Side Vent Height (feet min)	3 1/2	4 3/8	89	111
E	Side Vent (from back)	10 3/16	-	258	-

66W 19 of 21

DETAILED PLANNING DIMENSIONS

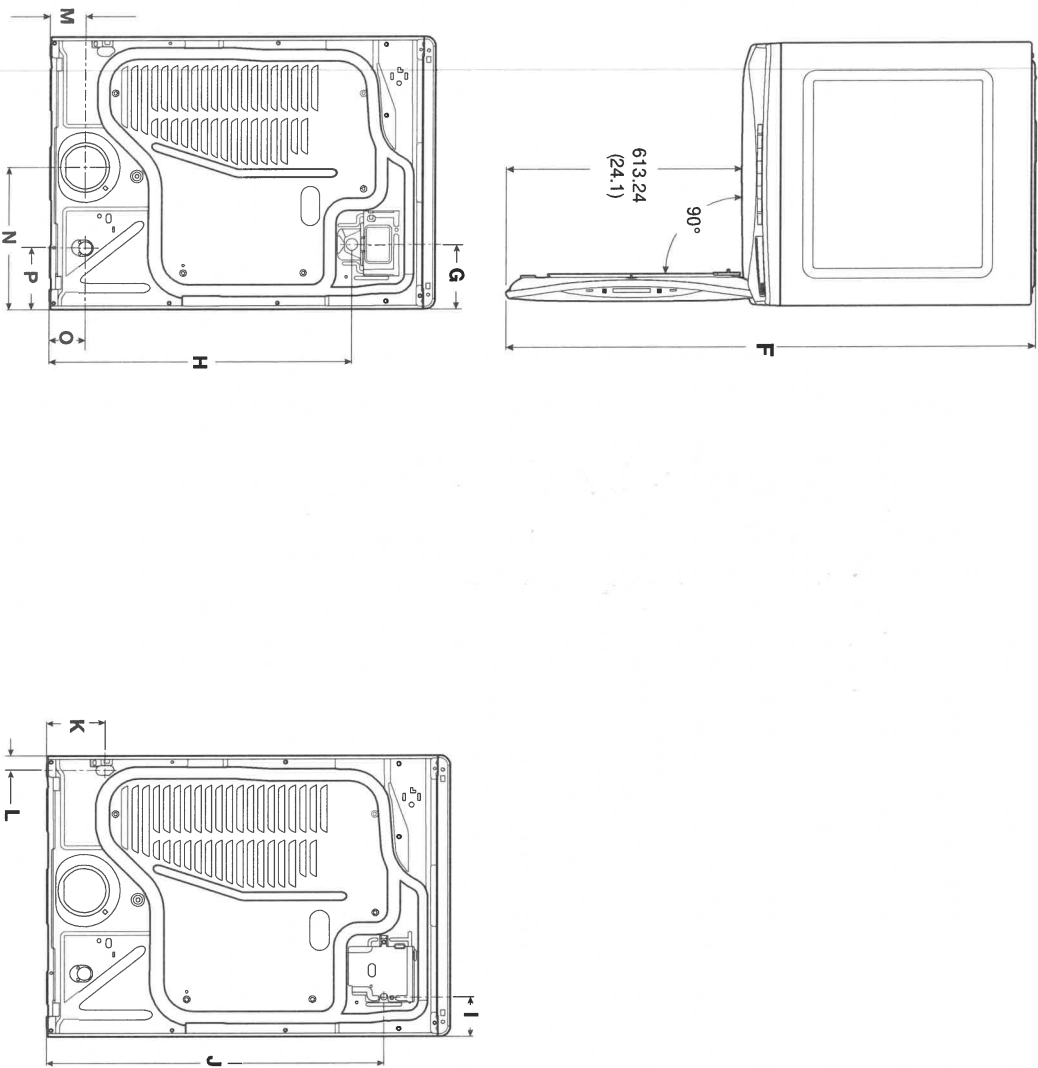


Product Dimensions				
		in (min)	in (max)	
F	Depth with Door Open	54 ⁵ / ₁₆	-	mm (min)
G	Strain Relief from Side (elec)	6 ³ / ₈	-	1378
H	Strain Relief Height (elec)	29 ⁷ / ₈	30 ¹¹ / ₁₆	163
G	Power Cord from Side (Canadian)	6 ³ / ₈	-	759
H	Power Cord Height (Canadian)	29 ⁷ / ₈	30 ¹¹ / ₁₆	163
	Power Cord Length (Canadian)	53 ³ / ₈	-	759
I	Power Cord from Side (gas)	3 ¹³ / ₁₆	-	1356
J	Power Cord Height (gas)	31 ¹³ / ₁₆	32 ¹¹ / ₁₆	96
	Power Cord Length (gas)	72	-	808
K	Gas Valve Height	5 ⁵ / ₈	6 ³ / ₈	1828
L	Gas Valve from Side	1 ³ / ₈	-	142
M	Exhaust Duct Height	3 ¹ / ₂	4 ³ / ₈	36
N	Exhaust Duct from Side	14 ¹ / ₈	-	90
O	Water Inlet Height	3 ⁵ / ₈	4 ³ / ₈	358
P	Water Inlet from Side	6 ¹ / ₈	-	91
				156
				-

DETAILED PLANNING DIMENSIONS

Spacing for recessed area or closet installation

The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and oor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilations openings are acceptable.
- Companion appliance spacing should also be considered.

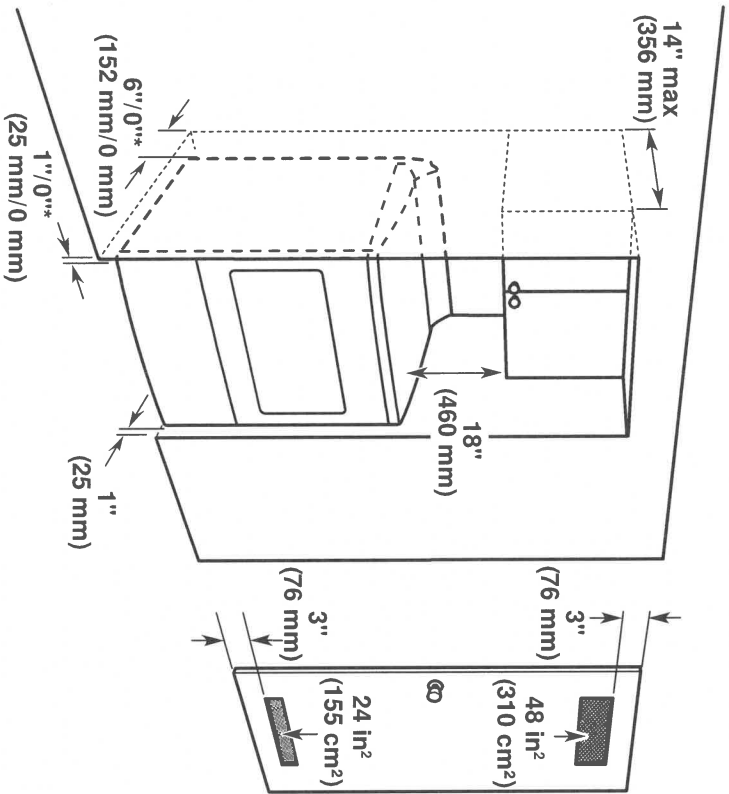

*Recommended/Minimum spacing

66W

21 of 21