



AREZZO Insert


ELICA PRO SERIES

Arezzo provides professional grade performance, while being discreetly mounted inside the cabinetry.

Arezzo is available in 28 1/2" width with a 600 CFM blower, and equipped with a 1200 CFM blower for widths of 34 1/2", 40 1/2" and 46 1/2" for extraordinary ventilating power.

The extra depth (22") is ideal for supporting powerful professional ranges. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting.


Easy maintenance, higher efficiency and a cleaner kitchen are ensured by Elica's Professional Baffle Filters, which capture a higher percentage of contaminants and hold larger volumes of grease than traditional baffle filters. Arezzo is designed for standard ducted installation only.



LED lamps



hidden metallic in/out knob controls



professional stainless steel baffle filters

Elica Design Center

Dimensions | Models

28 1/2" W x 22" D x 11 1/2" H | EAR628S3

Arezzo 28" Stainless

34 1/2" W x 22" D x 11 1/2" H | EAR134S3

Arezzo 34" Stainless

40 1/2" W x 22" D x 11 1/2" H | EAR140S3

Arezzo 40" Stainless

46 1/2" W x 22" D x 11 1/2" H | EAR146S3

Arezzo 46" Stainless



HUSH



LED LIGHT



PROFESSIONAL PERFORMANCE



HEAT GUARD




215 W

1 OF 20

FEATURES

Size (in) & Type	28", 34", 40" or 46" Wide Insert
Finish	Stainless steel
Controls	IN/OUT Backlit Knob
Illumination	2 LED (28" & 34") 7.5 watts LED light, replaceable lamps (1 intensity) 4 LED (40" & 46") 7.5 watts LED light, replaceable lamps (1 intensity)
Installation Type	Ducted Installation Only
Blower Type	600 CFM, 4-Speed Internal (28" Unit) 1200 CFM, 4-Speed Internal (34", 40", 46" Units)
Blower Performance	Speed 1 (For 28") 90 CFM, (For 34", 40" & 46") 380 CFM Speed 2 (For 28") 330 CFM, (For 34", 40" & 46") 660 CFM Speed 3 (For 28") 490 CFM, (For 34", 40" & 46") 950 CFM Speed 4 (For 28") 600 CFM, (For 34", 40" & 46") 1200 CFM
Noise (sones):	28" Unit: Min: 2.05, Max: 7.05 Sones 34", 40", 46" Units: Min: 2.05, Max: 7.05 Sones
Filter Type	Dishwasher-Safe, Professional Stainless Steel, Angled Baffle Filters 2 (28", 34", 40" Units) 3 (48" Unit)
Duct Transition	10" Round with Back Draft Damper (top only)
Electrical	120V-60Hz
Warranty	2 Year Parts & Labor, In-Home Service

Line Drawing



Models			
	EAR628S3	EAR134S3	EAR140S3
A	28½" (72.4 cm)	34½" (87.6 cm)	40½" (103 cm)
B		22" (55.9 cm)	46½" (118 cm)
C		5¾" (13.8 cm)	
D		6½" (16.4 cm)	
E		27¾" (70 cm)	
F		12¾" (31.6 cm)	
G		29¾" (75.7 cm)	
H		10¾" (25.7 cm)	
I		10" (25.4 cm)	
J		¾" (1.9 cm)	

Accessories

Replacement Grease Filter (1)
CODE: GF061A

Consumable parts are sold in units of one (1). Order accordingly.

Flint Design Partner



215W


20520

PLUS

Whirlpool®

55 dBA* Front Control Dishwasher

WDF330PAH

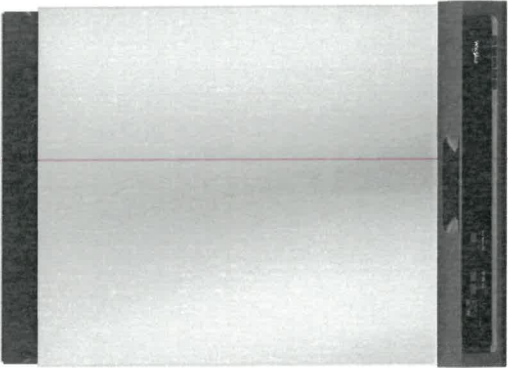

Stainless Steel
WDF330PAHS

Also available in:

- ☐

White

WDF330PAHW
- ☒

Black

WDF330PAHB

Key Features & Benefits

- 1-Hour Wash Cycle

Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*
- Soil Sensor


Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.
- Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.

Capacity	
Total Place Settings	13
General Features & Properties	
Heavy Cycle	
High Temperature Wash Option	
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dishwasher Brand†	
Designed, Engineered and Assembled in the U.S.A. with American Pride	
Electrical Details	
Amps	10
Volts	120
Hz	60
Certifications	
ENERGY STAR® Certified	Yes

ENERGY STAR® Certified

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	
Dimension Guide	
Install Guide	
Use & Care Guide	
Energy Guide	
Warranty	

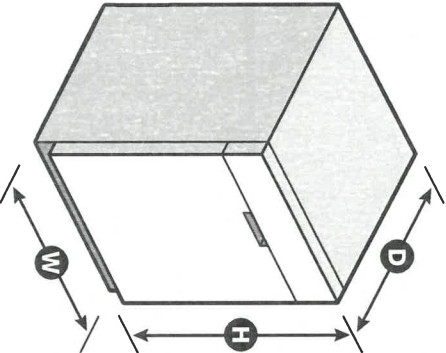


*Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. ©/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

215W
3 of 20



4.3 cu. ft. Front Load Washer

WFW560CH

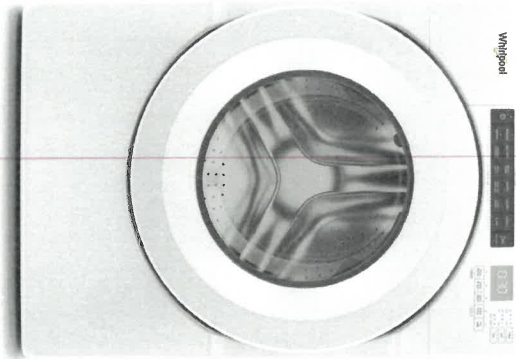

White
WFW560CHW

Key Features & Benefits

4.3 cu. ft. Capacity

Get plenty of room for bulky items with 4.3 cu. ft. capacity.

ENERGY STAR® Certified

ENERGY STAR® certified models exceed government standards to help conserve natural resources and save money on your utility bills

Intuitive Controls

Let the washer guide you to the right cycle combinations or customize up to 35 of your own to get the right type of fabric care for whatever you're washing.

Capacity	
Total	4.3 cu. ft.
General Features & Properties	
Sanitize Cycle with Oxi	
Quick Wash Cycle	
Cold Wash Cycle	
Presoak Option	
Single Load Dispenser	
Closet-Depth Fit	
Smooth Wave Stainless Steel Wash Basket	
Clean Washer with Affresh® Cycle	
Laundry Pedestals	
Electrical Details	
Amps	15 or 20
Volts	120
Certifications	
ADA Compliant	Yes
ENERGY STAR® Certified	Yes


Technical Details	
Drum Material	Stainless Steel
Control Location	Front
Control Type	Tap Touch
Number of Cycles	37
Washer Cycle Selections	
Bulky Items Clean Washer with affresh® Cold Wash Colors Delicates Drain & Spin Heavy Duty Normal Quick Wash Regular Sanitize with Oxi Towels Whites Wrinkle Control	
Number of Options	7
Washer Option Selections	Control Lock Extra Rinse
Dimensions	
Product Dimensions (H x W x D)	38-5/8" x 27" x 31-9/16"
Depth with Door Open 90°	56-1/2"
Reference Material	

[Install Guide](#)

[Use & Care Guide](#)

[Energy Guide](#)

[Warranty](#)

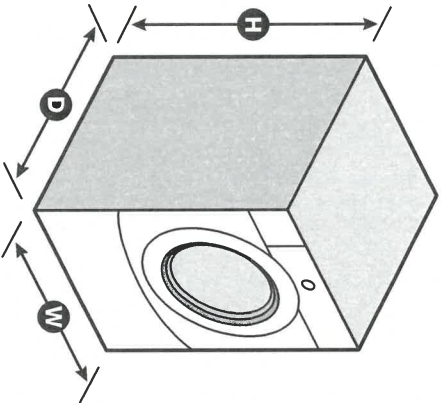

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
©/™ © 2020. All rights reserved. Printed in the U.S.A. D200104XXD. WFW560CHSpecSheetV01.

215 W
4 of 20



Dimension Guide
Whirlpool® Dryer with
Intuitive Touch Controls - 7.4 cu. ft.

White
Available
YWED5620HW - Electric
WED5620HW - Electric
WGD5620HW - Gas



W11462160A



25 W

5 of 20

DETAILED PLANNING DIMENSIONS

WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

Electrical Requirements		
Fuel Type	Electric	Gas
Minimum Circuit Amperage Rating	30 A	15 A
Maximum AMP Draw	24 A	6 A
Operating Voltage	240 V AC only 230 V AC only (Canada)	120 V AC only
Operating Frequency	60 Hz	

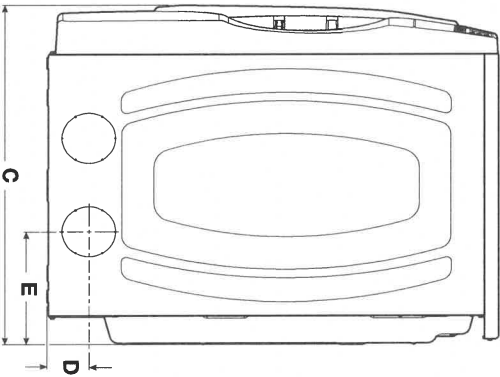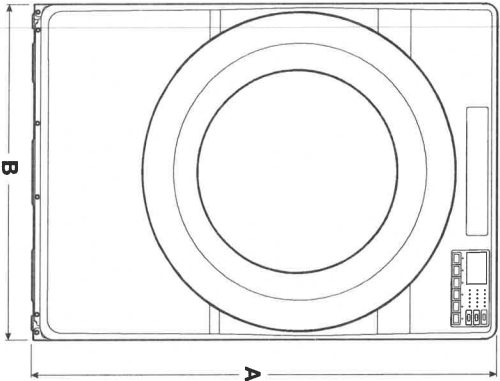


Product Dimensions					
		in (min)	in (max)	mm (min)	mm (max)
A	Height (with feet)	38 ¹ / ₈	39	968	989
B	Width	27	-	686	-
C	Depth	30 ⁵ / ₈	-	778	-
D	Side Vent Height (feet min)	3 ¹ / ₂	4 ³ / ₈	89	111
E	Side Vent (from back)	10 ³ / ₁₆	-	258	-

25M

6 of 20

DETAILED PLANNING DIMENSIONS

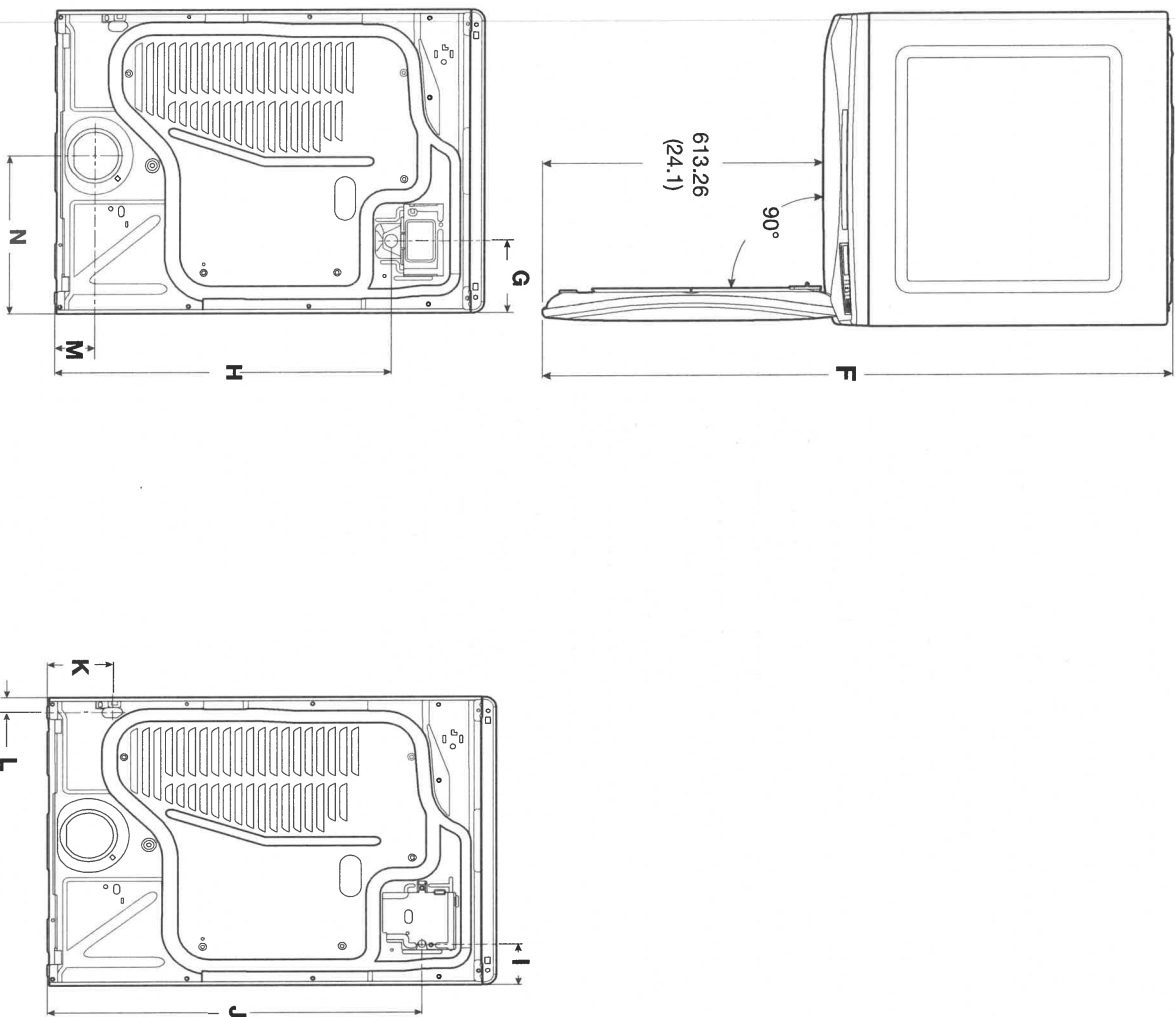

Product Dimensions				
		in (min)	in (max)	
F	Depth with Door Open	54 ⁵ / ₁₆	-	1378
G	Strain Relief from Side (elec)	6 ³ / ₈	-	163
H	Strain Relief Height (elec)	29 ⁷ / ₈	30 ¹¹ / ₁₆	759
G	Power Cord from Side (Canadian)	6 ³ / ₈	-	163
H	Power Cord Height (Canadian)	29 ⁷ / ₈	30 ¹¹ / ₁₆	759
	Power Cord Length (Canadian)	53 ³ / ₈	-	1356
I	Power Cord from Side (gas)	3 ¹³ / ₁₆	-	96
J	Power Cord Height (gas)	31 ¹³ / ₁₆	32 ¹¹ / ₁₆	808
	Power Cord Length (gas)	72	-	1828
K	Gas Valve Height	5 ⁵ / ₈	6 ³ / ₈	142
L	Gas Valve from Side	1 ³ / ₈	-	36
M	Exhaust Duct Height	3 ¹ / ₂	4 ³ / ₈	90
N	Exhaust Duct from Side	14 ¹ / ₈	-	358


215 W 7 6 f 20

DETAILED PLANNING DIMENSIONS

Spacing for recessed area or closet installation


The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

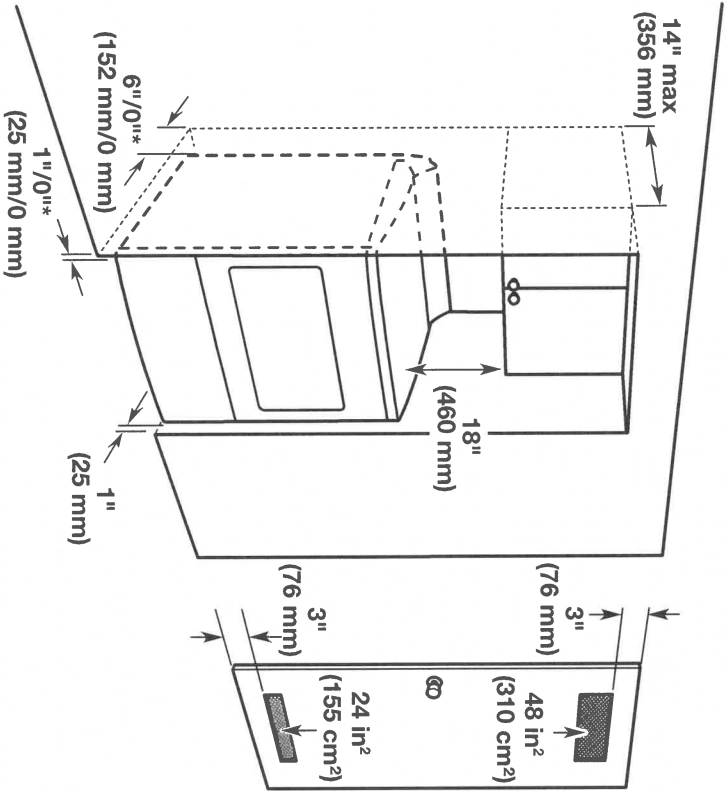

*Recommended/Minimum spacing

8 of 20
215 W

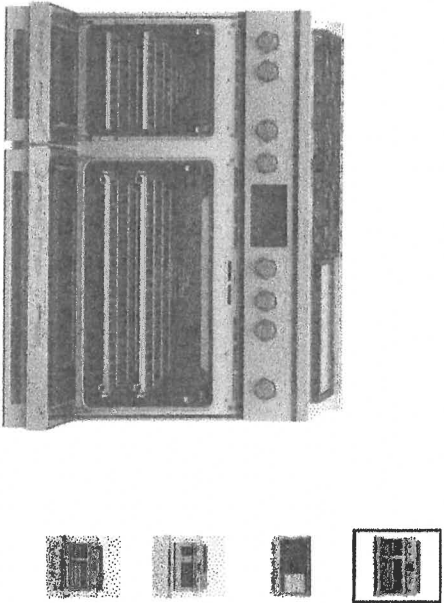

RDV3-48SGD-N

Dual Fuel Range, 48\", 5 Burners with Griddle, Self-cleaning

REVIEWS ★★★★★ 5.0 (1)

SERIES 9 ⓘ PROFESSIONAL

With intuitive touchscreen and specialized cooking functions across two ovens, this range is a stand-out addition to your kitchen.

FINISH	Stainless Steel
FUEL TYPE	Natural gas
OVERVIEW	FEATURES & BENEFITS
	SPECIFICATIONS
	RESOURCES

WHERE TO BUY

215 W 9 of 10

Dual Fuel Range, 48", 5 Burners with
Griddle, Self-cleaning

- Guided cooking using your touchscreen makes it simple to cook by food, function or recipe.
- Gas cooktop with griddle and a top burner heat up to 23,500 BTU, for seriously fast boiling
- 6.9 cu ft total oven capacity across two oven cavities
- Ensure perfect results with the food probe, included


Height
35 3/4" - 36 3/4"

Width
47 7/8"

Depth
29 1/9"

FEATURES & BENEFITS

The feature images used on this page are examples to demonstrate the product benefits and may differ slightly from the actual product.

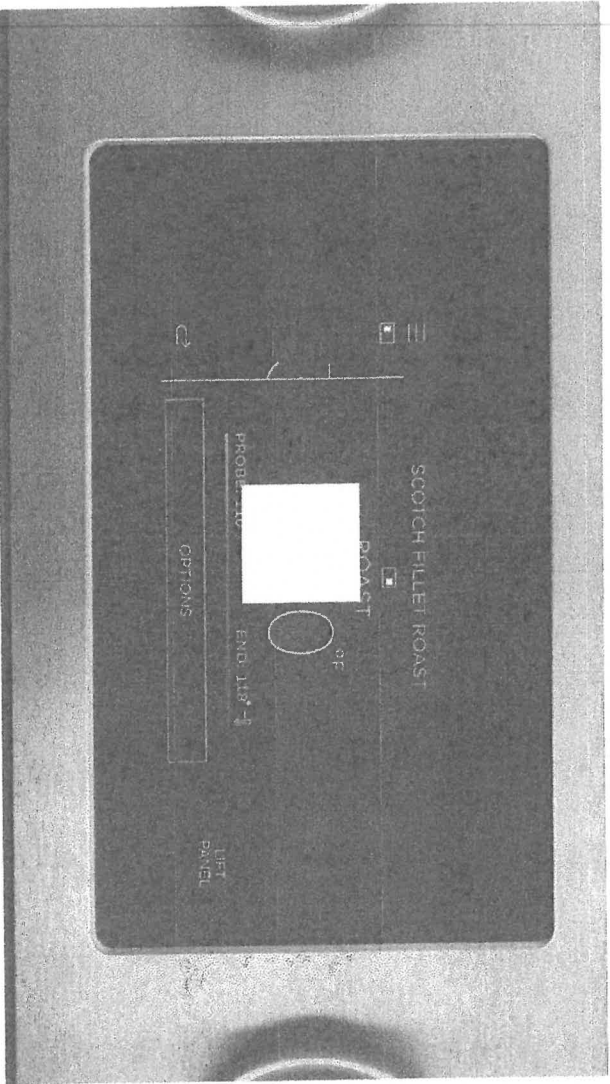


PERFECT RESULTS

COOK WITH CONFIDENCE

Our touchscreen interface provides an intuitive guided cooking experience that helps deliver perfect results, whether you've been cooking all your life or just starting out. Cook with a favorite method, a hero ingredient, or a go-to cooking function or recipe. The screen tilts for improved ergonomics and optimal visibility while cooking.

10 of 20
215 W

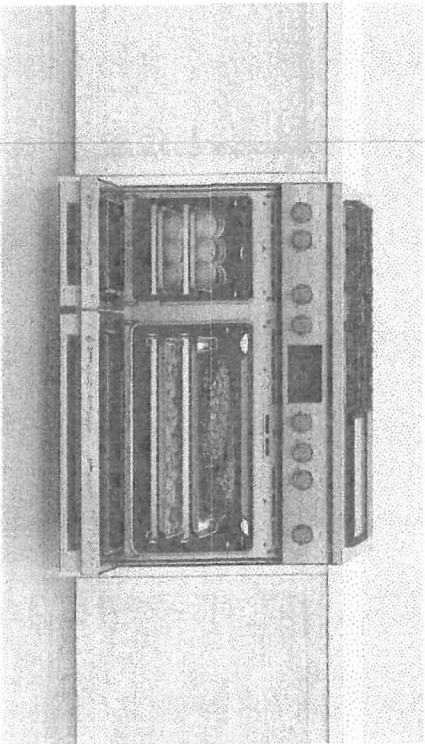

PERFECT RESULTS


GENEROUS CAPACITY

Two independently operating cavities provide a large total capacity of 4.8 cu. ft. in the main cavity and 2.1 cu. ft. in the secondary. That's enough room for a 32 lb turkey in one oven, and your sides in the other.

PERFECT RESULTS

COOKING FLEXIBILITY


No matter what you're cooking, you've got the right heat to get perfect results. Each of the 15 oven functions in the main cavity and 11 in the secondary have been extensively researched and carefully designed to cater to a broad range of dishes and cooking styles. The handy food probe helps you monitor your progress.

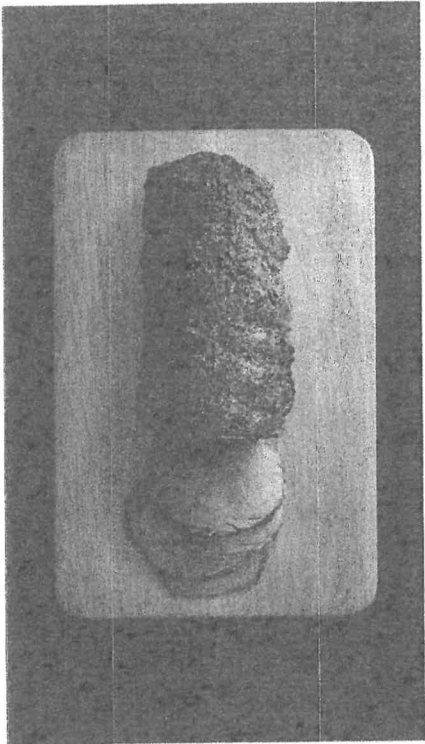

PERFECT RESULTS


COOKTOP POWER

Sealed dual flow burners deliver cooktop power up to 23,500 BTU for seriously fast boiling, and precise 140°F full surface, low temperature cooking with the gentlest of flames.

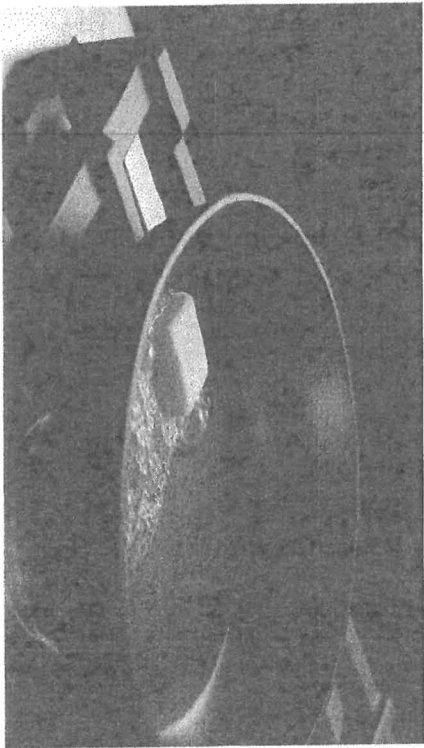

DESIGN QUALITY


This range has craftsmanship in every detail, with real stainless steel, cast-iron trivets, and beautifully weighted, halo illuminated dials. Each cavity features incandescent lights and full extension telescopic racks. From the robust legs to the powerful cooktop, this Range is built to last.

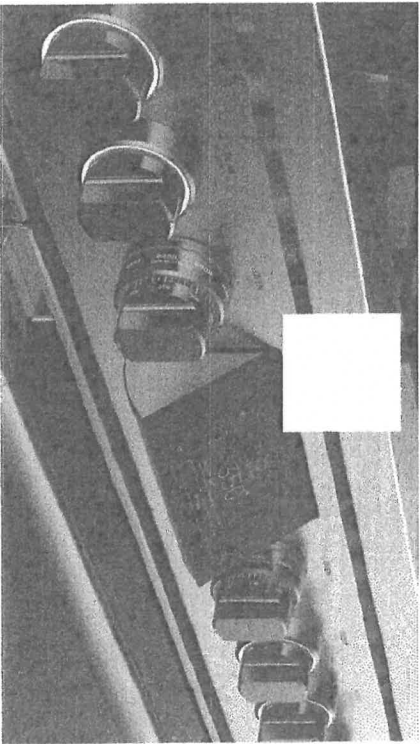


BEAUTIFUL TO USE

EASY TO CLEAN

The oven features a self-cleaning function and self-clean proof side racks, which don't need to be removed when using this function.

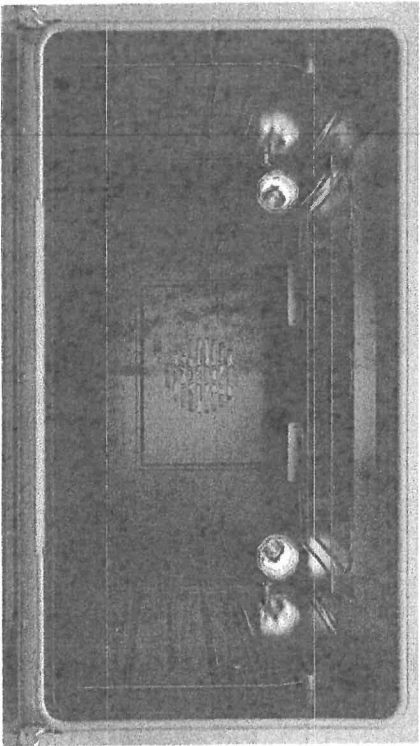

SPECIFICATIONS

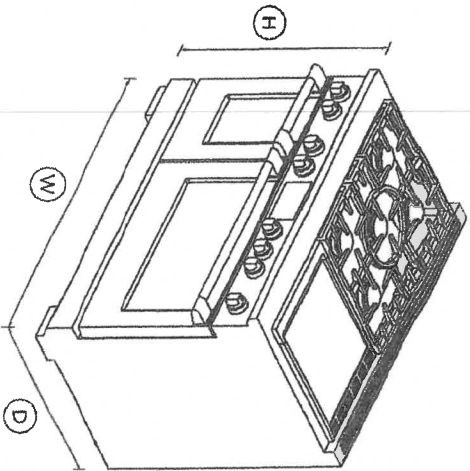

Height	35 3/4" - 36 3/4"
Width	47 7/8"
Depth	29 1/8"

215W 12 of 20

ACCESSORIES		OVEN PERFORMANCE	
Square handle option	AH-R48	Bake power	4600
CAPACITY	Shelf positions	Broil	3600W
	Total capacity second oven	Main oven - True convection power	2500W
CLEANING		POWER REQUIREMENTS	
Dishwasher proof trivets		Amperage	50A
Pyrolytic self-clean		Rated current	50A
		Supply frequency	60Hz
CONTROLS		PRODUCT DIMENSIONS	
Dial with illuminated halo		Depth	29 1/8"
Electric circuit	4 wire	Height	35 3/4" - 36 3/4"
High resolution display		Width	47 1/8"
Metal illuminated dials		RANGETOP FEATURES	
Multi-language interface		Sealed Dual Flow Burners™	5
Precise cooking with food probe		Sealed range top	
Recipe and food based functions		Vent trim included	
Sabbath mode		RANGETOP PERFORMANCE	
Tilting touch screen interface		Centre	23,500 BTU
WiFi connectivity		Power back left	18,500 BTU
		Power back right	18,500 BTU
GAS REQUIREMENTS		Power centre	23,500 BTU
Fitting and pipe	1/2 NPT, min. 5/8" Ø flex line	Power front left	18,500 BTU
Supply Pressure (LPG)	11" to 14" W/C	Power front right	18,500 BTU
Supply Pressure (Natural gas)	6" to 9" W/C	Power griddle	24,000 BTU
OVEN FEATURES		RECOMMENDED BACK GUARDS VENTILATION	
Concealed element		Combustible situation	BGRV3-3048H
Electronic oven control		Non combustible situation	BGRV2-3048 / BGRV2-1248
Full extension telescopic sliding shelves		Recommended hood	HCB48-12_N (48" Professional Range Hood, Dual Blower)
Internal light			
Titanium coated, illuminated metal dials			
OVEN FUNCTIONS		SAFETY	
Warm		ADA compliant	

SECONDARY OVEN FEATURES		SECONDARY OVEN FUNCTIONS	
3/4 Extension racks	2	Air fry	•
Concealed element	•	Bake	•
Convection bake	•	Classic bake	•
Electronic oven control	•	Convection broil	•
Food probe	•	Maxi broil	•
Internal light	•	Number of secondary oven functions	11
		Pastry bake	•
		Pizza bake	•
		Rapid proof	•
		Roast	•
		Warm	•

RESOURCES

SELECT

DESIGN PLANNING

- [1 Specification Guide Dual Fuel Range](#)
- [1 Data Sheet Dual Fuel Range](#)
- [1 Planning Guide Dual Fuel Range](#)

GENERAL

- [1 Quick Reference guide](#)
- [1 User Guide](#)
- [1 User Guide](#)
- [1 User Guide](#)
- [1 Guide D'Utilisation](#)

CAD DOWNLOADS

2D CAD Files

Show individual item downloads

3D CAD Files

Show individual item downloads

INSTALLATION

- [1 Installation Guide](#)
- [1 Installation Guide](#)
- [1 Installation Guide](#)
- [1 Guide D'Installation](#)

CUSTOMER REVIEWS



Reviews

OVERVIEW

FEATURES & BENEFITS

SPECIFICATIONS

RESOURCES

215W 14 of 26

Rating Snapshot

Select a row below to filter reviews.

5 ★	1
4 ★	0
3 ★	0
2 ★	0
1 ★	0

Average Customer Ratings

Overall	★★★★★	5.0
Design	★★★★★	5.0
Quality	★★★★★	5.0
Experience	★★★★★	5.0

★★★★★ M Dmnd · a month ago
So far so good

Only had the range a month but love it so far and hoping its as good as the dishwasher

7 photos & reviews Originally posted on fisherpaykel.com/us

Design	★★★★★	5.0
Quality	★★★★★	5.0
Experience	★★★★★	5.0

REGISTER YOUR PRODUCT

RESOLVE AN ISSUE

BOOK A SERVICE

PRODUCTS

- Cooking
- Ventilation
- Cooling
- Dishwashing
- Laundry

INSPIRATION

- Experience Centres
- Projects
- Articles
- OUR STORY
- About Us
- History
- Careers

HELP & SUPPORT

- Contact Us
- QUICK LINKS
- Trade Resources
- Promotions
- Connected Living
- Cool Blue World

OVERVIEW

FEATURES & BENEFITS

SPECIFICATIONS

RESOURCES

215 W 15 of 20

CHANGE LOCATION

Canada (English)



Latest COVID-19 precautionary measures taken by Fisher & Paykel

[Find Out More](#)



Privacy Terms & Conditions Disclaimer SiteMap

© Fisher & Paykel Appliances Ltd 2021

Member of National Kitchen & Bath Association


OVERVIEW FEATURES & BENEFITS SPECIFICATIONS RESOURCES

215W 16 of 20

FRIGIDAIRE
PROFESSIONAL

FPMO3077TF

Frigidaire Professional
30" Built-In Convection
Microwave Oven with
Drop-Down Door

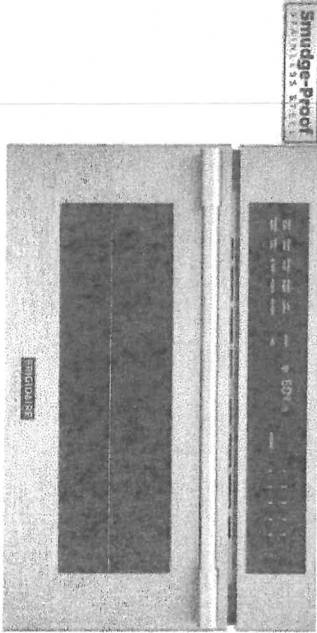

AVAILABLE
COLORS

MORE EASY-TO-USE
FEATURES


Keep Warm
Consistently keep your dishes warm, for up to 90 minutes, until everything and everyone is ready.

PowerBright® LED Lighting
See the power. See the results in action. LED interior microwave light stays on while your dish cooks.


PowerPlus™ 2-in-1 Convection Oven or Microwave
Get the great tasting results of a conventional convection oven combined with the speed of microwave technology with the PowerPlus™ 2-in-1 Convection Microwave Oven.

PowerSense™ Cooking Technology
Results you can trust. PowerSense™ Cooking Technology automatically senses ideal time and power levels.


Smudge-Proof® Stainless Steel
Resists fingerprints and cleans easily.

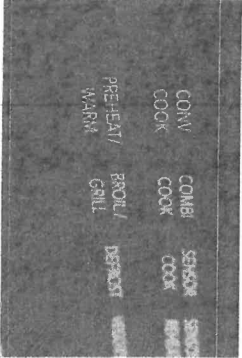


PowerSense™ Broil & Grill
Grill fresh or frozen pizza at the touch of a button.

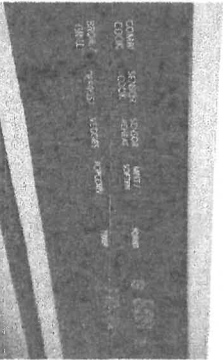

PowerSense™ Auto Defrost
Take the guesswork out of defrosting meat, poultry, or fish with PowerSense Auto Defrost.

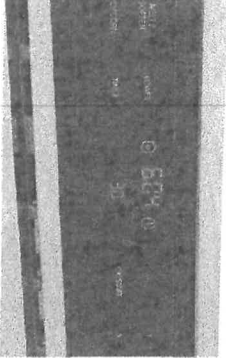

Adjustable Timer
Now you can adjust the cooking time of your dish while it's cooking. The adjustable timer allows you to add 30 seconds on the timer.



Drop Down Door
Faster, easier access to what you are cooking with Drop Down Door configuration.

215 W

17 of 20


FPMO3077TF

Frigidaire Professional 30"
Built-In Convection Microwave
Oven with Drop-Down Door

FRIGIDAIRE
P R O F E S S I O N A L .

General Specifications	
Product Weight	85.5 lbs
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Power Type	Electric
Size	30"
Installation Type	Built-In
Collection	Frigidaire Professional
Internal Specifications	
Turntable Diameter	14 19/100"
One Touch Options	
Add 30 Seconds	Yes
Snacks	Yes
Soften / Melt	Yes

Exterior	
Exterior Finish	Smudge-Proof® Stainless Steel
Dimensions and Volume	
Height	19"
Width	29 13/16"
Depth	22 3/8"
Cutout Height	18"
Cutout Width	28 3/8"
Cutout Depth	22"
Microwave Capacity	1.6 Cu. Ft.
Electrical Specifications	
Voltage Rating	120 V
Cooking Options	
Cooking Power	1750 Watts
Number of Power Levels	9

 **Notes:** For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca). Specifications subject to change. Accessories information available on the web at [frigidaire.com / frigidaire.ca](http://frigidaire.com/frigidaire.ca)

FRIGIDAIRE
USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca


FPMO3077TF
©2017 Electrolux Home Products, Inc.

215 W

18 of 20

KEY FEATURES


AVAILABLE COLOURS



Enjoy new ways to control your home with LG smart appliances

- Get an alert when kids forget to close the door
- Make more ice while you're at work
- Works with the LG SmartThinQ app

 works with the  alexa




© 2019 LG Electronics Canada Inc. All rights reserved. "Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 08/01/19

2/5 W 19 of 20

LG REFRIGERATION

LRFVS3006
36" InstaView™ Door-in-Door® with Craft Ice

PRODUCT DIMENSIONS

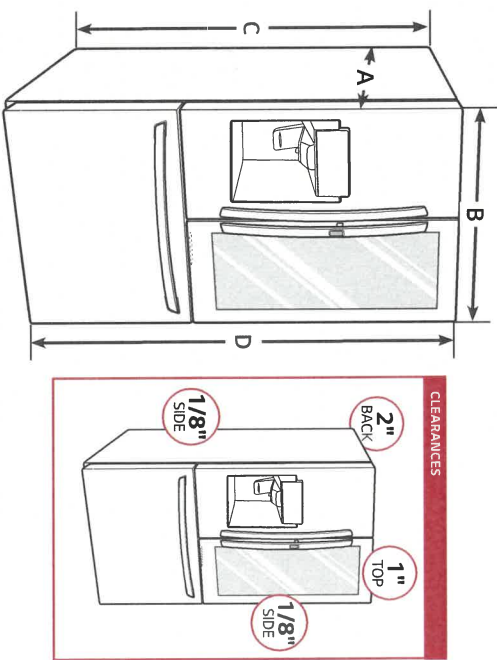

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHTS	
A Depth without Handles	34 1/8"
B Width	35 3/4"
C Height to Top of Case	68 7/8"
D Height to Top of Door Hinge	70 1/4"
E Back Clearance	2"
F Depth without Door	29 7/8"
G Depth (Total with Door Open)	48 1/2"
M Depth with Handles	36 5/8"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 1/4"
Door Edge Clearance without Handle	2 1/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Carton Dimensions (WxHxD)	38" x 73" x 39"

IMPORTANT

CHOOSING THE PROPER LOCATION

WATER

Select a place where a water supply can be easily connected for the automatic

NOTE

- The water pressure must be 20 – 120 psi or 138 – 827 kPa or 1.4 – 8.4 kgf/cm². If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, 60 Hz, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

WARNING

- To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing.

Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.

NOTE

- Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.

AMBIENT TEMPERATURE

Install this appliance in an area where the temperature is between 55°F (13°C) and 110°F (43°C). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.



CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE

Make sure the location of the water supply pipe is within the marked range.


Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)

Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.

Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.

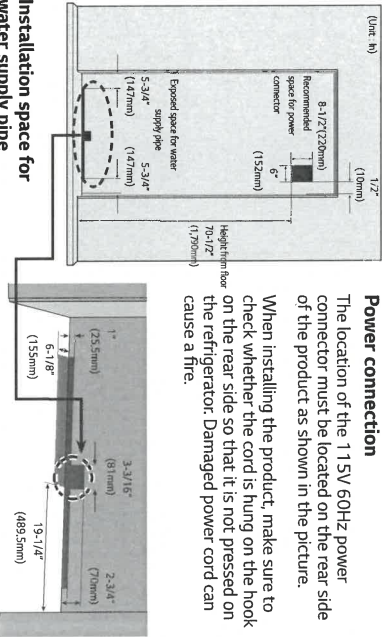

Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16\"/>

215 W

20 of 20