



KOBE Range Hoods

So Quiet... You Won't Believe It's On!




Built-In Hood



Wireless Remote Control
(Sold Separately)
- magnet to attach any magnetic surface
- remote control range up to 16 feet

3D View

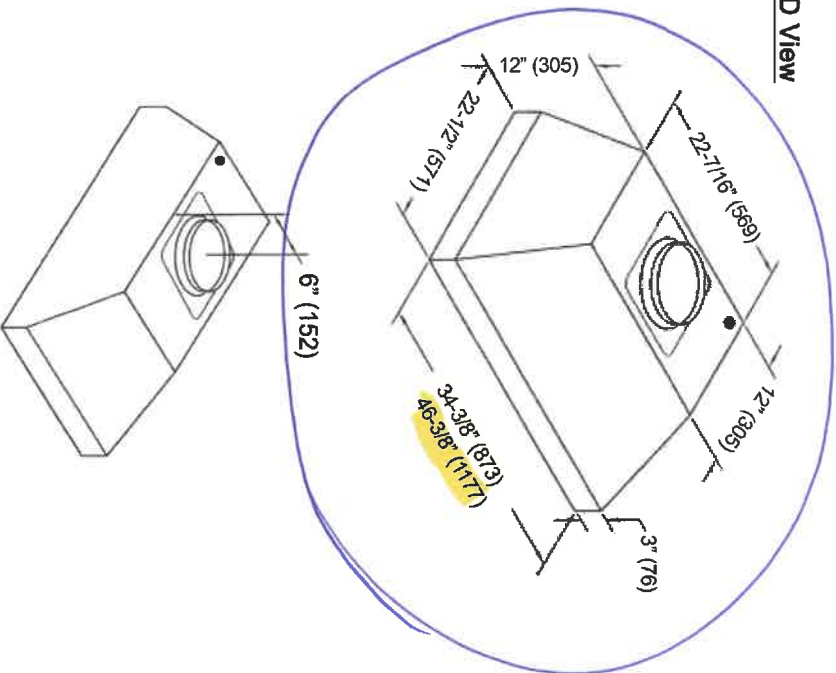


Information subject to change without notice.
Measurement in inches (mm). Inches are converted


Premium[®] IN26 SQB-1200-1 SERIES Built-In

Model / Size	
IN2636SQB-1200-1 / 36" IN2648SQB-1200-1 / 48"	
Appearance	
Stainless Steel	✓
Seamless	✓
Performance	
CFM / Sone	350 to 1200 / 1.6 to 8.0
QuietMode™	1.6 Sone / 46.5db
ECO Mode	10 Minutes on QuietMode™ Every Hour to Promote a Cleaner Kitchen Air Quality
LED Lights	3 Level Lighting 2 x Lights (3W) - 36" 3 x Lights (3W) - 48"
Speed	6 Speed
Control	Electronic Buttons with LED Display
Blower Type	Single Horizontal Squirrel Cage
Exhaust	Top - 8" Round
Consumption / Ampere	580W / 5.0A
Filter	Baffle Filter



Top View



Side View



Front View

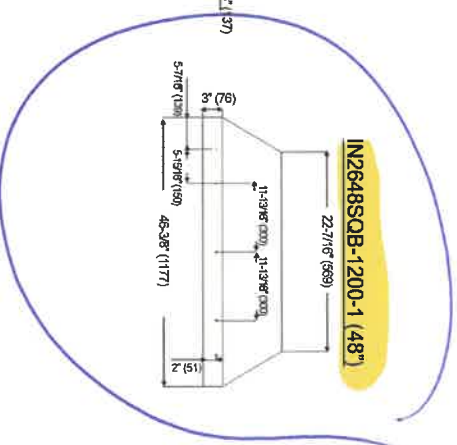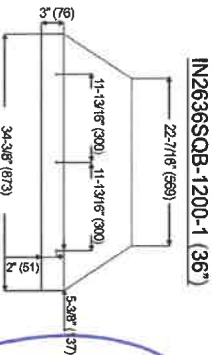

* Building code may vary.
www.koberangehoods.com VER.180101

188W


JUL 2 5 2022

RISE™ 30" Single Wall Oven with MultiMode® Convection System

JJW2430LL

Available Finishes/Colours

JJW2430LL
Stainless Steel

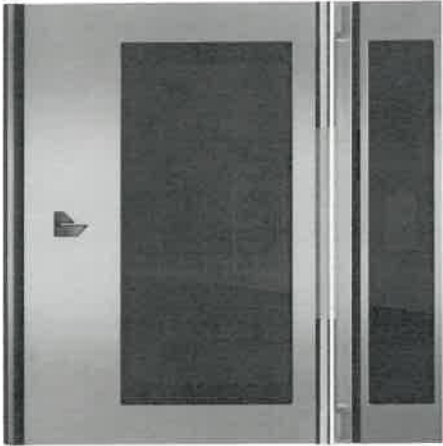

Beyond a veil of dark glass, the power of the MultiMode® Convection system caresses every morsel with even heat. With curated recipe presets and full-color images, an intuitive, guided culinary experience awaits your touch.

- Top Features
- Quieter Than the Leading Luxury Wall Oven Brand*
- MultiMode® Convection System
- V2™ Vertical Dual-Fan Convection

- Manuals & Literature:
- Dimension Guide
 - Installation Guide
 - Use and Care Guide
 - Warranty Information

Dimensions		23 1/4
Depth		
Height	29 7/8	
Width	30	
Compatibility		No
Connectivity		
Exterior		Yes
Door Lock		
Handle Material	Stainless Steel	
Door Type	Metal & Glass	
Flush Installation Approved	Yes	
Installable Under Cooktop	Yes	
Handle Color	Stainless Steel	
Controls		Tap Touch
Control Type		
Display Color	Full Color	
Controls		LCD Touch Screen
Electronic Display Type		
Features		English/French
Language Conversion		
LP Convertible	No	
Power On Indicator Light	Yes	
Details		Yes
Automatic Shut-Off		
Bake Element Power	2800W/2427W	
Number of Bake Elements	1	
Interior Color	Black	
Oven Cooking System	Convection	
Door Broil Position	Closed	



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


188W

JUL 25 2022

SINGLE WALL OVENS

JW24271 – 27" x 29-7/8" x 25-5/16"

JW24301, JW34301 – 30" x 29-7/8" x 25-5/16"

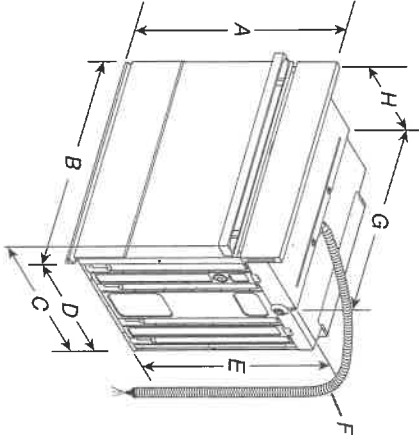


PRODUCT DIMENSIONS SINGLE OVENS

27" (68.6 CM) MODELS

- 29-7/8" (75.8 cm) max. overall height
- B. 27" (68.6 cm) overall width
- C. JW24271M – 26-3/8" (67 cm)
JW24271L – 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 27-3/16" (69 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 25-7/16" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

30" (76.2 CM) MODELS

- A. 29-7/8" (75.8 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JW24301M – 26-3/8" (67 cm)
JW24301L – 27-3/16" (69 cm)
JW34301M – 26-3/8" (67 cm)
JW34301L – 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 27-3/16" (69 cm)
- F. 48" (121.9 cm) flexible conduit length
- G. 28-7/16" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief



UNDERCOUNTER CABINET DIMENSIONS SINGLE OVENS

27" (68.6 CM) MODELS

- A. 27" (68.6 cm) min. cabinet width
- B. 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C. 5-1/4" (13.3 cm) bottom of cutout to floor
- D. 25-1/2" (64.8 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

30" (76.2 CM) MODELS

- A. 30" (76.2 cm) min. cabinet width
- B. 1-1/2" (3.8 cm) min. top of cutout to underside of countertop
- C. 5-1/4" (13.3 cm) bottom of cutout to floor
- D. 28-1/2" (72.4 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

SINGLE OVENS INSTALLED IN CABINET

27" (68.6 CM) MODELS

- A. 27" (68.6 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 25-1/2" (64.8 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm) recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 27-1/4" (69.2cm) and 29-7/16" (74.8 cm) for 27" single ovens.

30" (76.2 CM) MODELS

- A. 30" (76.2 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 28-1/2" (72.4 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm) recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 27-1/4" (69.2 cm) and 29-7/16" (74.8 cm) for 30" single ovens.

IMPORTANT: Do not make any cutouts based on this information. BEFORE



JUL 25 2022

SINGLE WALL OVENS

JW24271 – 27" x 29-7/8" x 25-5/16"
JW24301, JW34301 – 30" x 29-7/8" x 25-5/16"

ELECTRICAL REQUIREMENTS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. C-M91-latest edition, and all local codes and ordinances.


A copy of the above code standards can be obtained from:

- National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471
- CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

ELECTRICAL CONNECTION

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located under the control panel on single ovens. See the following illustration



A. Model/Serial/Rating Plate

- Models rated from 7.3 to 9.6 kW at 240 V (5.4 to 7.4 kW at 208 V) require a separate 40 A circuit. Models rated at 4.8 kW and below at 240 V (3.6 kW and below at 208 V) require a separate 20 A circuit.
- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored, or nonmetallic sheathed, copper cable (with grounding wire).
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum. Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models JW24271, JW24301 and JW34301, refer to the following table.

240 VAC		208 VAC
MODEL	kW	kW
JW24271	4.1	3.1
JW24301	4.1	3.1
JW34301	4.5	3.4


IMPORTANT: Do not make any cutouts based on this information. BEFORE



188W
JUL 25 2022

Prepared by
Grant Armstrong
grant.armstrong@caplans.ca (437) 216-5243

CAPLAN'S APPLIANCES

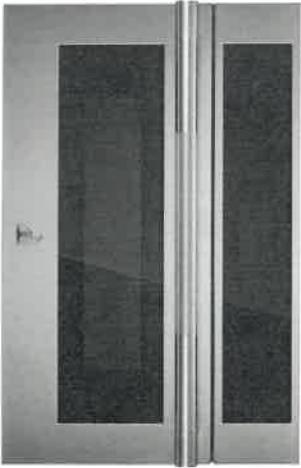

RISE™ 30" BUILT-IN MICROWAVE OVEN WITH
SPEED-COOK

JMC2430LL

Available Finishes/Colours

JMC2430LL
Stainless Steel

Dimensions		Depth	25 1/2	Connectivity	No
Height	19 7/8	Width	29 3/4	Exterior	
Microwave Details		Microwave Type	Built-In	Door Release	Handle
Cavity Finish	Stainless	Cavity Power (watts)	900	Door Opening	Drop Down
Connection	Yes	Convection Power (watts)	1200	Handle Color	Stainless Steel
Gill	Yes	Controls			
Grill Power (watts)	1600	Control Type	Tap Touch	Control Location	Top
Interior Light	No	Scrolling Electronic Display	No	Number of Quick Touch/One-Touch Selections	1
Number of Racks	1	Display Color	Full Color	Electronic Display Type	LCD Screen
Turntable	Stoppable	Features			
Turntable Diameter Size (in.)	14 1/8	Number of Power Levels	10		

Let your appetite run wild with microwave and convection energy. With curated recipes and full-color doneness images, an intelligent culinary experience awaits your touch.

- Top Features
- Convection & Microwave Combination Cooking
- 4.3-Inch Full Colour LCD Display
- Stainless Steel Microwave Interior

- Manuals & Literature:
- Installation Guide
 - Use and Care Guide
 - Warranty Information



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

188W

JUL 25 2021

Prepared by
Grant Armstrong
grant.armstrong@caplans.ca (437) 216-5243

CAPLAN'S APPLIANCES


48" RISE™ Gas Professional-Style Rangetop with Gas Grill

JGCP648HL

Available Finishes/Colours

JGCP648HL
Stainless Steel

JGCP648HM
Floating Glass Black



Dimensions

Depth	27 1/2
Height	7 7/16
Width	47 7/8

Features

Digital Display	No
Downdraft Vent	No
Hot Surface Indicator Light	No
Installs Over Built-In Oven	No
Griddle	NA
Heating Element On Indicator Light	No
LP Convertible	Yes - Kit Included
Power Boost	No
Power Outage Compatible	Yes (Gas Cooktop Burners Only)

Controls

Control Location	Front
Control Type	Knobs
Infinite Heat Controls	No
Knob Color	Stainless Steel
Knob Type	Metal

Sealed brass burners. Precise, dual flames. Unmistakable firepower erupting through cast-iron grates. Turn on the heat without the click-click clamor, and sear and simmer to satisfy your deepest hunger.

Top Features

14 Rangetop Configurations

Cast Iron Grates

Halo-Effect Knobs

Features

Automatic Pan Detection	No
-------------------------	----

Cooktop Details

Cooktop Surface Color	Black
-----------------------	-------

Manuals & Literature:

- CAD Image
- Dimension Guide
- Installation Guide
- Use and Care Guide
- Warranty Information



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

188W


JUL 23 2022

DIMENSIONS

JENNAIR® RANCETOPS

PRODUCT

	30" RANCETOP JGCP430H	36" RANCETOP JGCP436H	48" RANCETOP JGCP548H
Overall Width (A)	29-3/4" (75.6 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)
Grate Depth (B)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Depth without Control Panel (C)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)
Depth with Control Panel Overhang (D)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Depth with Knobs: RISE™ (E)	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Depth with Knobs: NOIR™ (E)	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

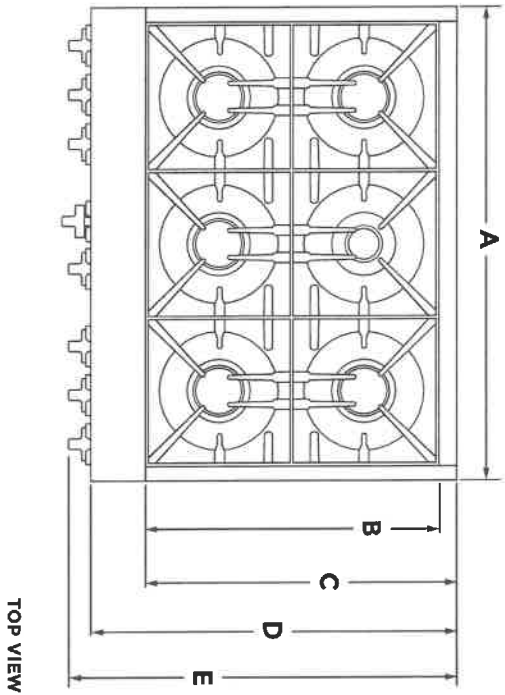

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

WT1358024A


188W

JUL 25 2022

DIMENSIONS
JENNAIR® RANCETOPS
PRODUCT

	30" RANCETOP JGCP430H	36" RANCETOP JGCP436H	48" RANCETOP JGCP548H
Grate Width (F)*	27-7/16" (69.7 cm)	33" (83.8 cm)	44-3/8" (112.7 cm)
Gas Inlet to Surface (C)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Center to Gas Inlet (H)	11" (27.8 cm)	14-1/8" (35.9 cm)	19-5/8" (49.8 cm)
Recessed Rancetop Width (I)	29-1/8" (74 cm)	35" (88.9 cm)	47-1/4" (120 cm)

*Includes width of grates and griddle.

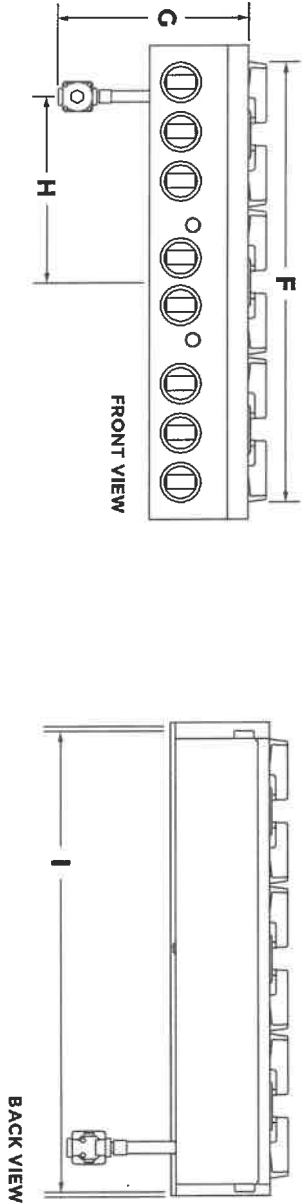


1828W

DIMENSIONS

JENNPAIR® RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Height with G-rates (J)	9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
Control Panel Height (K)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
Recessed Rangetop Height (L)	7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
Cooking Surface Height (M)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
Recessed Rangetop Depth (N)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Depth with Control Panel (O)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

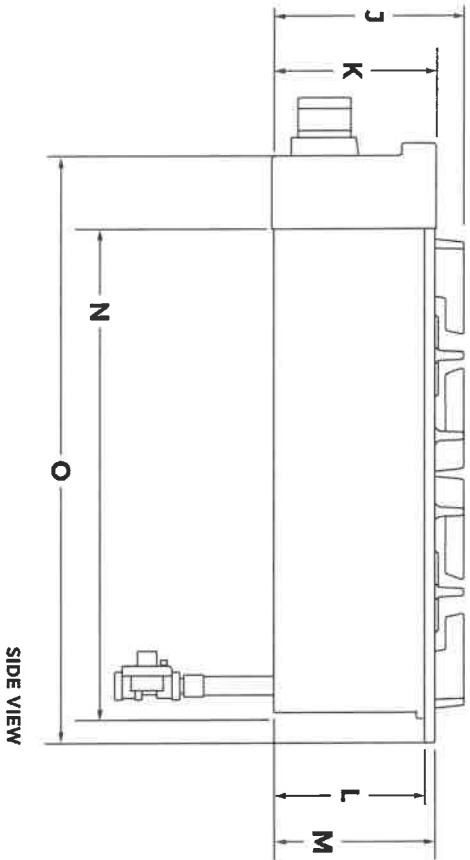

★ **IMPORTANT:** Supplied regulator does not come preattached and is pictured for reference purposes only.

188W

JUL 25 2022


DIMENSIONS

JENNAIR® RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.

*Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

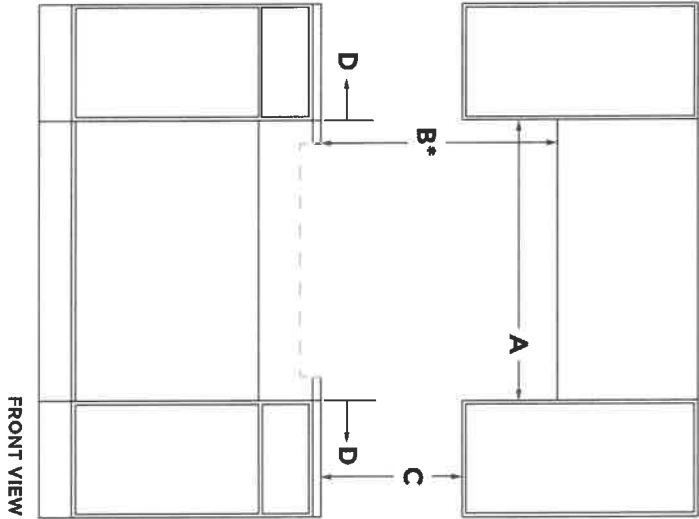

188W

JUL 25 2022


DIMENSIONS

JENNAIR® RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Recommended Upper Cabinet Depth (E)	13" (33 cm)	13" (33 cm)	13" (33 cm)
Cutout to Wall Depth (F)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.
Cabinet to Countertop Height (C)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)
Cabinet Depth (H)	24" (61 cm)	24" (61 cm)	24" (61 cm)


*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

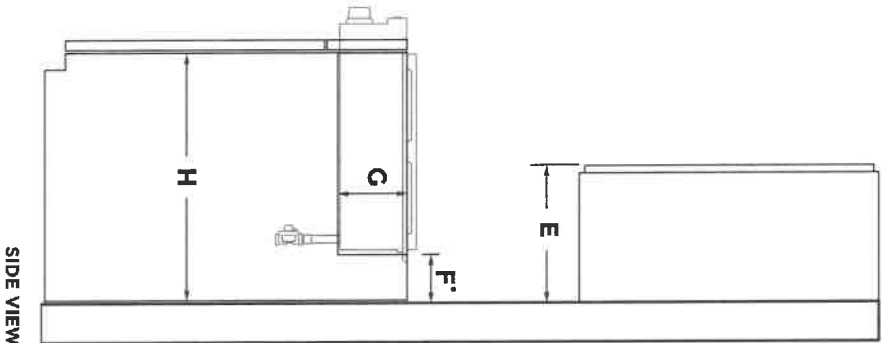

SIDE VIEW

DIMENSIONS
JENNAIR® RANCETOPS
OPENING AND CLEARANCE

	30" RANCETOP JCCP430H	36" RANCETOP JCCP436H	48" RANCETOP JCCP548H
Countertop and Cabinet Cutout Width (I)	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-3/8" (120.3 cm)
Countertop and Cutout Depth (J)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
Notch Width (K)	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
Cutout Width (L)	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

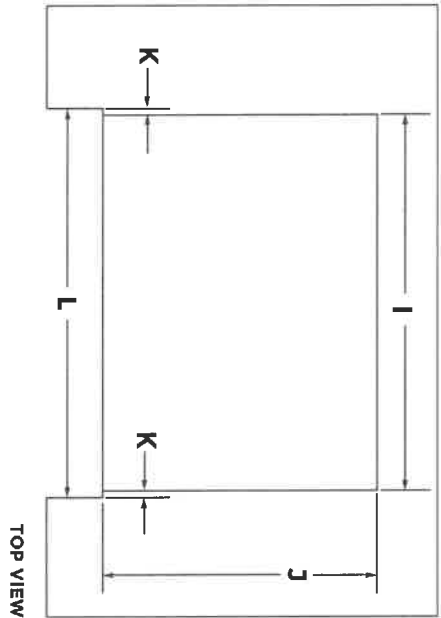


18 cm

JUL 25 2022

DIMENSIONS
JENNAIR® RANCETOPS
ELECTRICAL REQUIREMENTS

ELECTRIC REQUIREMENTS CHECKLIST	
<input type="checkbox"/>	A 120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.
<input type="checkbox"/>	A dedicated circuit is recommended.

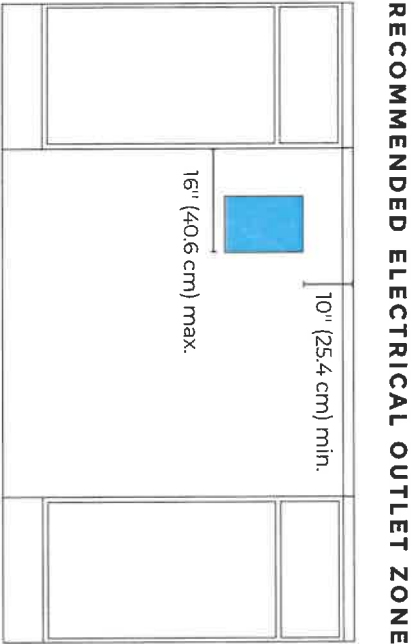

FRONT VIEW

188W


? IF YOU HAVE QUESTIONS ABOUT YOUR ELECTRICAL SUPPLY,
CALL A LICENSED, QUALIFIED ELECTRICIAN.

DIMENSIONS

JENNAIR® RANCETOPS

GAS REQUIREMENTS


RECOMMENDED GAS SUPPLY LOCATION

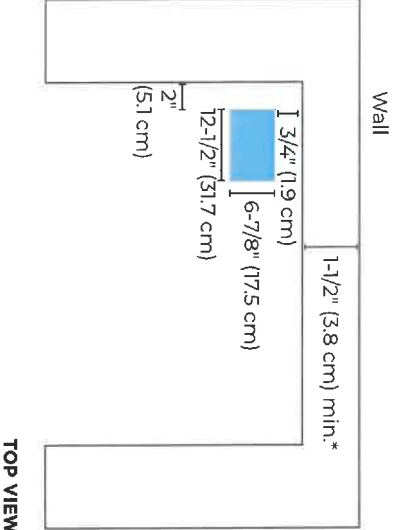

TOP VIEW

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2\" (19.1 cm) minimum clearance is required from the cutout or 6\" (15.2 cm) minimum clearance from the back edge of the rangetop.

GAS SUPPLY ZONE

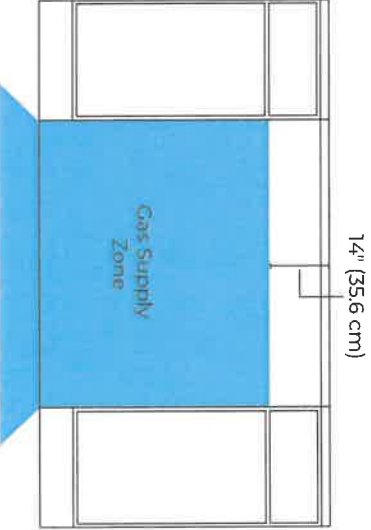

FRONT VIEW

182m



IF YOU HAVE QUESTIONS ABOUT YOUR GAS SUPPLY,
CALL A LICENSED, QUALIFIED SERVICE TECHNICIAN.



48-Inch Built-In Side-by-Side Refrigerator with
Water Dispenser

JS48PPDUDE

Available Finishes/Colours

JS48PPDUDE
Stainless Steel

Dimensions		Controls	
Depth	27 3/4	Door Ajar/Open Alarm	Yes
Height	83 3/8	Control Location	Interior Up Front
Width	48 3/8	Max Cool/Fast Cool	Yes
AHAM Volumes And Shelf Area		Sabbath Mode	Yes
Freezer Volume (Cu Ft)	10.30	Water Filter Indicator/Reset	Yes
Refrigerator Volume (Cu Ft)	19.20	Misc.	
Details		Accessory Relationships	Yes
Cooling Type	Single Evaporator	Home Delivery	Yes
Counter Depth	Yes	Will Call	Yes
Door Style	Flat	GDS	
Controls		isBaseUnit	true
Control Type	Tap Touch	isConsumerUnit	true
Air Filter Indicator/Reset	No	isDispatchUnit	
Automatic Defrost	Yes	isInvoiceUnit	true

- Manuals & Literature:
- CAD Image
 - Energy Guide
 - Use and Care Guide
 - Dimension Guide
 - Installation Guide
 - Warranty Information

This Jenn-Air® built-in side-by-side refrigerator features our exclusive Obsidian Interior that complements the convenient side-by-side design and exceptional food preservation. It also features an in-door water dispenser for ice and filtered water. This model is available in Euro-Style Stainless (JS48SSDUDE) and Pro-Style Stainless (JS48PPDUDE) exterior design styles.

Top Features

Obsidian Interior

Precision Temperature Management™ System

Capacitive Touch Controls with LED Display



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

1284N


JUL 25 2022

 **48" SIDE-BY-SIDE
REFRIGERATOR WITH ICE
AND WATER DISPENSER**

DETAILED PLANNING DIMENSIONS GUIDE

JS48PPDUDE – 47³/₄" (W) x 83³/₈" (H) x 27³/₄" (depth with handles)
JS48SSDUDE – 47³/₄" (W) x 83³/₈" (H) x 27¹/₈" (depth with handles)

PRODUCT DIMENSIONS

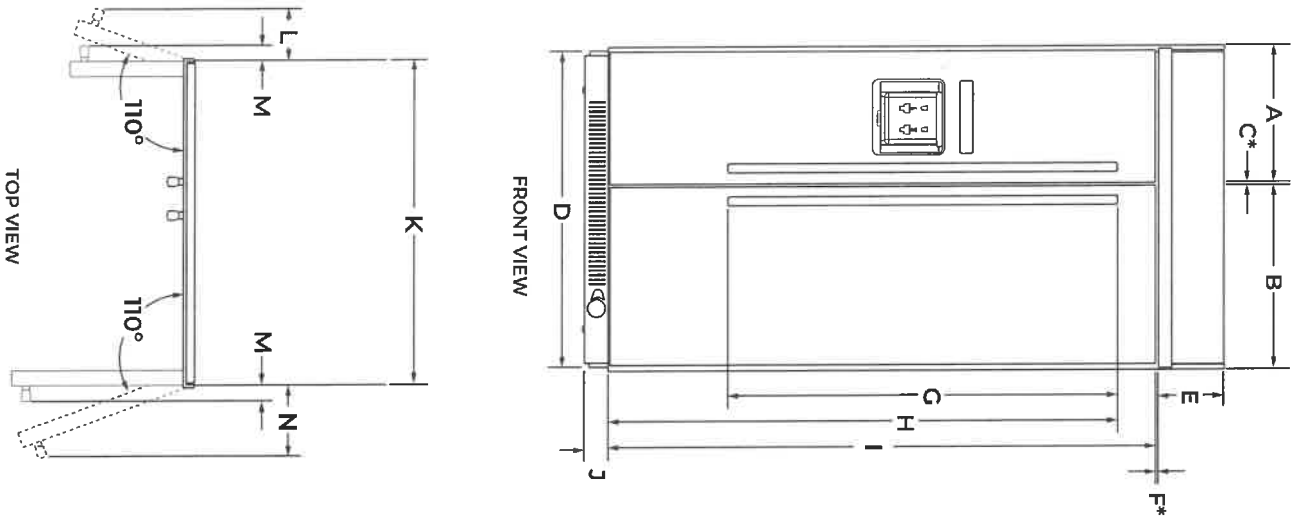

DIMENSION	DESCRIPTION	JS48PPDUDE JS48SSDUDE
A	Width of freezer door (including hinge side offset)	20" (50.8 cm)
B	Width of refrigerator door (including hinge side offset)	27" (68.6 cm)
C*	Space between doors	1/4" (0.6 cm)
D	Overall width (including side trim)	48 1/2" (123.1 cm)
E	Height of top grille	8 5/8" (21.7 cm)
F*	Space between doors and top grille	3/8" (1 cm)
G	Height of handles	
	Pro-Style® Stainless	45 9/16" (115.7 cm)
	Euro Style Stainless	50" (127.1 cm)
H	Height to top handles	
	Pro-Style® Stainless	63 11/16" (163.5 cm)
	Euro Style Stainless	65 3/4" (167 cm)
I	Height of door	71" (180.2 cm)
J	Height of bottom grille	3" (7.6 cm)
K	Width of recessed refrigerator	47" (119.4 cm)
L	Width from side of refrigerator to freezer handle – door fully open 110°	
	Pro-Style® Stainless	8 3/8" (21.3 cm)
	Euro Style Stainless	8" (20.3 cm)
M	Width from side of refrigerator to handle – door open 90°	
	Pro-Style® Stainless	2 5/8" (6.7 cm)
	Euro Style Stainless	2" (5.1 cm)
N	Width from side of refrigerator to refrigerator handle – door fully open 110°	
	Pro-Style® Stainless	10 7/8" (27.6 cm)
	Euro Style Stainless	10 1/4" (26.1 cm)

*This can vary from factory.

1886

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

W11356557C

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


 **48" SIDE-BY-SIDE
REFRIGERATOR WITH ICE
AND WATER DISPENSER**

DETAILED PLANNING DIMENSIONS GUIDE

JS48PPDUDE – 47³/₄" (W) x 83³/₈" (H) x 27³/₄" (depth with handles)
JS48SSDUDE – 47³/₄" (W) x 83³/₈" (H) x 27¹/₈" (depth with handles)

DIMENSION	DESCRIPTION	JS48PPDUDE JS48SSDUDE
A*	Height without compressor (min.)	73 ³ / ₄ " (187.3 cm)
B*	Height of recessed refrigerator (min.)	82 ³ / ₄ " (210.1 cm)
C	Depth with refrigerator door open 90° (min.)	51 ¹ / ₈ " (129.7 cm)
D	Depth with handles (min.)	
	Pro-Style® Stainless	27 ³ / ₄ " (70.5 cm)
	Euro Style Stainless	27 ¹ / ₈ " (68.8 cm)
E	Depth with doors (min.)	25 ³ / ₈ " (63.8 cm)
F	Depth without doors (min.)	23 ⁵ / ₈ " (60 cm)
G	Depth of machine compartment (min.)	19 ⁷ / ₈ " (50.5 cm)

*Add 1¹/₄" (3.2 cm) to the height dimension when leveling legs are fully extended.

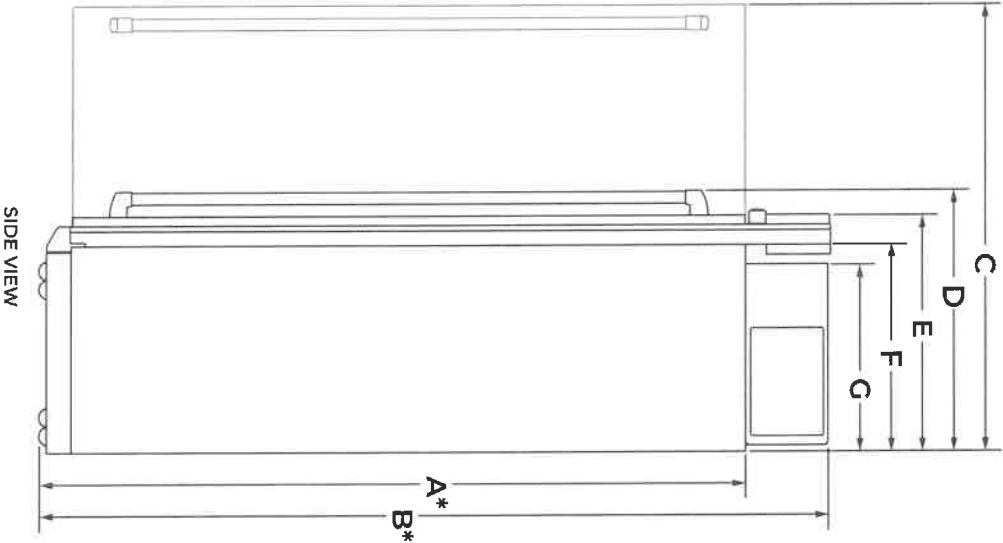

188cm

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

 **48" SIDE-BY-SIDE
REFRIGERATOR WITH ICE
JENNAIR® AND WATER DISPENSER**


DETAILED PLANNING DIMENSIONS GUIDE

JS48PPDUDE – 47³/₄" (W) x 83³/₈" (H) x 27³/₄" (depth with handles)
JS48SSDUDE – 47³/₄" (W) x 83³/₈" (H) x 27³/₈" (depth with handles)

OPENING/CLEARANCE DIMENSIONS

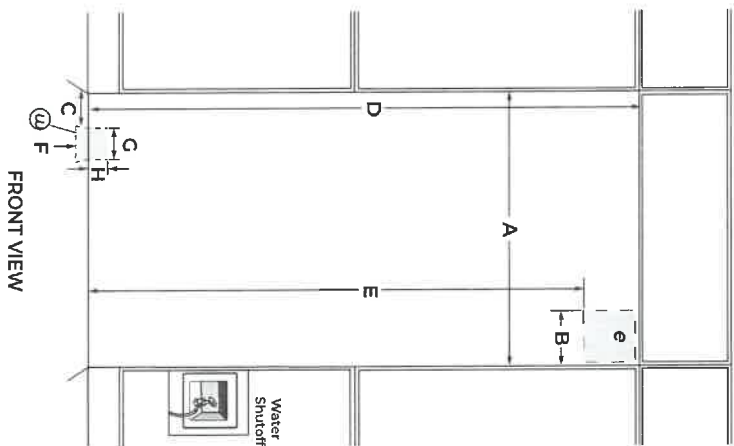

DIMENSION	DESCRIPTION	JS48PPDUDE JS48SSDUDE
A	Width (min.)	47½" (120.7 cm)
B	Width of recommended electrical location	13½" (34.3 cm)
C	Distance from side of cabinet to recommended water connection location	6" (15.2 cm)
D	Height (min.)	84" (213.4 cm)
E	Height to recommended electrical location	77" (195.6 cm)
F	Depth of recommended water connection location (max.)	1" (2.5 cm)
G	Width of recommended water connection location	1½" (3.81 cm)
H	Height of recommended water connection location (behind the unit)	2½" (6.35 cm)
e	Recommended electrical connection location	
w	Recommended water connection location	

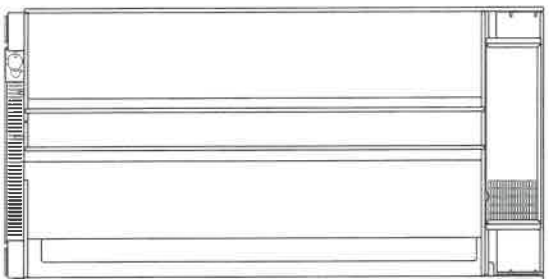



BACK VIEW

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

ELECTRICAL REQUIREMENTS

**WARNING**



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

115 V, 60 Hz, AC only, 15 or 20 A fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Minimum length of power cord is 84" (213.4 cm). Do not use an extension cord.

WATER PRESSURE REQUIREMENTS


A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.


Reverse Osmosis Water Supply

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

If a reverse osmosis water filtration system is connected to the cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

**WARNING**



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.

Floor must be able to support refrigerator (more than 600 lb [272 kg]), door panels and contents of the refrigerator and must be at the same level as flooring in the room.

188m


Prepared by
Grant Armstrong
grant.armstrong@caplans.ca (437) 216-5243

CAPLAN'S APPLIANCES

RISE™ 24" Built-In Dishwasher, 38 dBA
JDPSS246LL

Available Finishes/Colours

JDPSS246LL
Stainless Steel

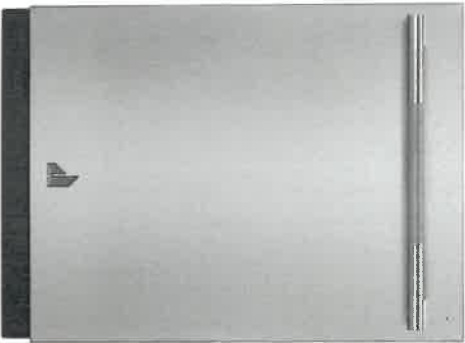

Dimensions	
Depth	24 1/2
Height	34 1/2
Width	23 7/8

Features	
Rinse Aid Dispenser Level Indicator	Yes
Dispensers	Detergent and Rinse Aid

Sound Package Yes

Controls	
Automatic Temperature Controls	Yes

Exterior	
Control Panel Color	Black

Control Type	Tap Touch with Display
--------------	------------------------

Handle Type	Towel Bar
-------------	-----------

Control Location Hidden, Top

True Hold Door Yes

Status Light	Multi-Color
--------------	-------------

Door Style	Flat
------------	------

End of Cycle Signal Yes

Handle Color Stainless Steel

Magnetic Door	No
---------------	----

Toe Panel Color Black

Handle Material	Metal
-----------------	-------

Inside, a storm rages as relentless power brings every dish and glass to a state of refined cleanliness. Outside, tranquility, with sleek lines wrapped in high design. With the largest 3rd level rack in the luxury industry* and the powerful TriFecta™ Wash System, the quietest luxury dishwasher brand** never sacrifices performance.

Top Features

Quietest Luxury Dishwasher Brand*

High-Capacity 3rd Rack with Wash

11% More Loading Height (Compared to JennAir® dishwasher models: JDTSS246GM, JDTSS246GL, JDTSS245GX.)

Manuals & Literature:

-  [Dimension Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)




Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

JUL 25 2022



JENNAI[®]

2 1/4"

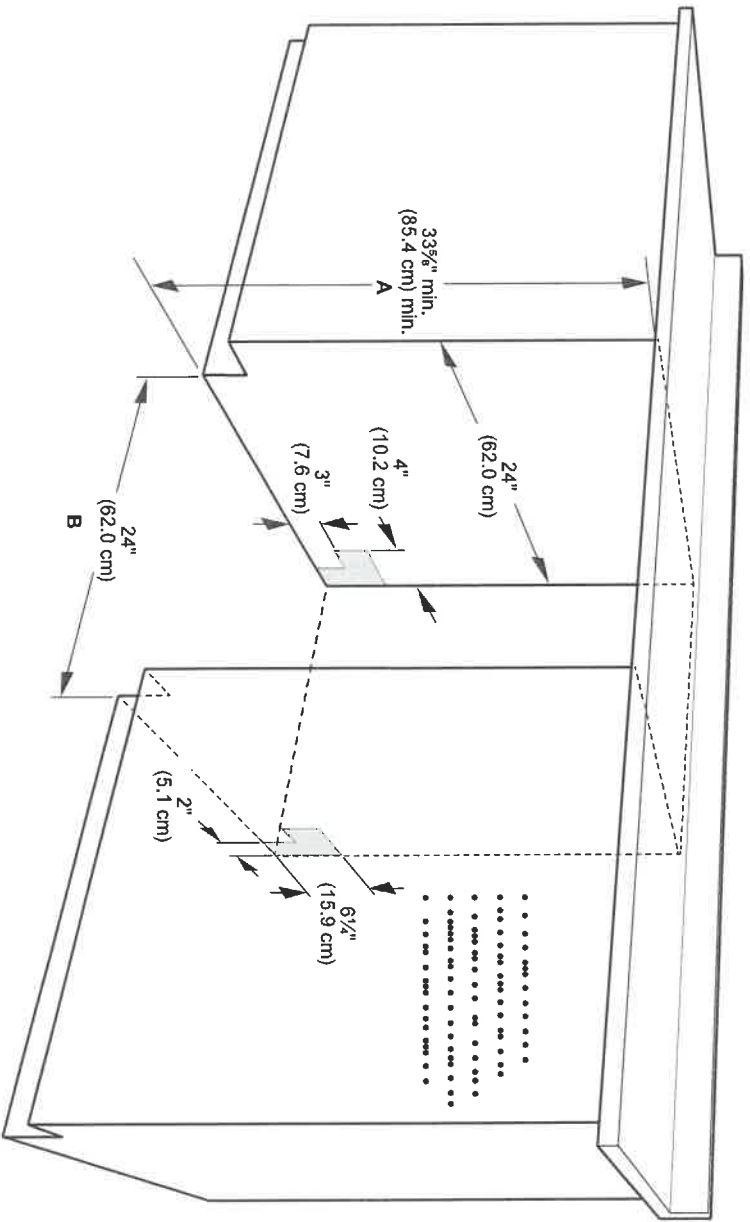

188w

JUL 25 2002