RF23A9771SR

22.5 cu. ft. Smart Counter Depth 4-Door Flex™ Refrigerator featuring Family Hub™ with Beverage Center and Dual Ice Maker



6 Simple Truths

What's for dinner?

Food recognition lets you know what's inside your fridge, quickly plan weekly meals, search for recipes, shop for missing ingredients and preheat your oven, all from the Family Hub™.

I love entertaining friends and family.

Stream your favorite music apps on the Family Hub^T through a premium speaker.

I don't want to miss my favorite show.

Mirror shows, movies, or live sports from your Samsung TV or smartphone on the Family Hub^{M} .

I love getting more done.

Get a notification on the Family Hub™ when the laundry is done.

I want to manage my life with ease.

See who's at the front door, monitor multiple rooms and adjust the thermostat, all from the Family Hub''.

It's the little moments that matter.

Upload pictures or videos remotely, leave handwritten notes and set calendar reminders, all on your Family Hub \H


Available Colors




Fingerprint Resistant Stainless Steel (shown)



Fingerprint Resistant Black Stainless Steel



Beverage Center



Dual Ice Maker with Ice Bites

Design

- · Beverage Center
- · Modern Design
- Built-in Look

Technology

- Family Hub"
- Dual Ice Maker with Ice Bites and Cubed Ice
- UV Deodorizing Filter

Performance

- FlexZone
- Flex Crisper
- · Triple Cooling

Rating



ENERGY STAR® rated: 631 kWh/yr



RF23A9771SR

SAMSHNG

22.5 cu. ft. Smart Counter Depth 4-Door Flex™ Refrigerator featuring Family Hub™ with Beverage Center and Dual Ice Maker


Installation Specifications

Dimensions

- 1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
- 2. Refer to illustration below to determine dimensions
- 3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
- 4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
- 5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and ability to open refrigerator doors completely, do not install

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product or download manual online at samsung.com.



Total Capacity: 22.5 cu. ft.

Refrigerator: 13.7 cu. ft.

- 4 Tempered Glass Spill-Proof Shelves
- 2 Clear Drawers: Flex Crisper and Crisper+
- · 6 Door Bins

Right: 1 Gallon Bin, 2 Regular Bins Left: 1 Gallon Bin, 2 Regular Bins

· LED Lighting

Freezer: 8.8 cu. ft.

- Dual Ice Maker in Freezer (Ice Bites or Cubed Ice) 2 Ice Buckets with Cover and 1 Scoop
- 3 Slide-Out Shelves
- · 6 Door Bins
- · LED Lighting

Accessories

Water Filter: HAF-QIN

One (1) Year Parts and Labor on Refrigerator

Five (5) Years Parts and Labor on Sealed Refrigeration System Only* Ten (10) Years Parts and Five (5) Years Labor on Digital Inverter Compressor *Compressor, evaporator, condenser, drier and connecting tubing.

Product Dimensions & Weight

Dimensions (WxHxD with hinges and doors):

35⁷/₈" x 71⁷/₈" x 28¹/₂"

Dimensions (WxHxD without hinges and doors):

 $35^{7}/8$ " x $70^{3}/4$ " x 24" Weight: 337.3 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: $38^{1}/_{2}$ " x $77^{5}/_{8}$ " x $30^{3}/_{5}$ "

Weight: 359.3 lbs

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	RF23A9771SR	887276525792
Fingerprint Resistant Black Stainless Steel	RF23A9771SG	887276524818

357/8"-> 717/8" 703/4

NZ30K7880US

129B Caledon


30" Induction Cooktop

Features

- Power Boost
- Wi-Fi Connectivity
- · Bluetooth Connected to Hood
- 15 Power Levels plus Booster
- Simmer
- Melt Setting
- 5 Induction Elements Including 4800W Dual Element – 7"/11"
- 8.6 kW Power
- 2-Stage Residual Heat Indicator

Convenience

- Kitchen Timer
- · Child Safety Lock
- Safety Shutoff
- Direct Access
- Quick Stop/Start/Pause Controls
- Demo Mode







Flex Zone

Magnetic Knob

Available Colors



Stainless Steel (shown)



Black Stainless Steel

Signature Features

VIRTUAL FLAME™ TECHNOLOGY

 LED Surface lights shine onto pans to give hie visual of gas cooking, with the precision of induction.

FLEX ZONE

 Large cooking area designed to adapt to different pot shapes and sizes for optimal flexibility.

DIGITAL-ANALOG CONTROLS

 The ultimate interface, choose between a removable magnetic analog-knob or digital touch controls.


NZ30K7880US

129B Caledon

30" Induction Cooktop

Installing Your Cooktop

Can be installed over a single oven.

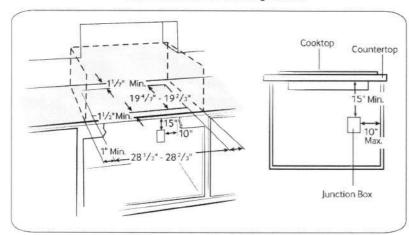

Total Power

8.6 kW

Power Source

240V / 60 Hz / 40A

Induction Cooktop

- Left Front: Flex Zone 1800W (Boost 2600W)
- Left Rear: Flex Zone 1800W (Boost 2600W)
- Right Front: 6" (Virtual Flame™) 1400W (Boost 1800W)
- Center: 7/11" (Virtual Flame™) 3600W (Boost 4800W)
- Flex Zone: 7¹¹/₁₆" x 15³/₄"

Warranty

One (1) Year All Parts and Labor

Product Dimensions & Weight (WxHxD)

Outside (Max) Cooktop Dimensions:

30" x 4" x 21 1/4"

Cooktop Cut-Out Dimensions:

281/2" x 4" x 194/7"

Weight: 49.8 lbs.


Shipping Dimensions & Weight (WxHxD)

34" x 75/16" x 25"


Weight: 60.8 lbs.

Color Model# **UPC** Code Stainless Steel NZ30K7880US 887276183190 Black Stainless Steel NZ30K7880UG 887276183435

Cut-Out Dimensions of Countertop

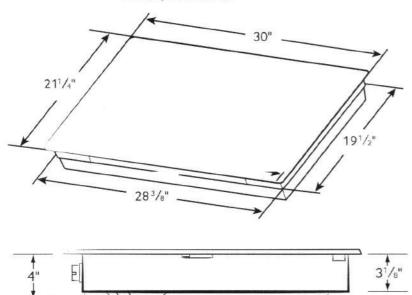

Cooktop Dimensions



- * See built-in oven installation for complete installation instructions See label on top of approved built-in oven models.
- ** Refer to installation manual of oven.

SAMSUNG

Dimensions

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate. @2017 Samsung Electronics America, Inc., 85 Chellenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG, samsung.com. Samsung is a registered trademark of Samsung Electronics Co., Ltd.

NQ70M7770DS

129B Caledon

30" Microwave Combination Wall Oven



Signature Features

Steam Cook (Oven)

 Delivers moisture at precise times for a crisp, browned outside and tender inside.

Speed Cook (Microwave)

• Cook food faster and more evenly by using power convection.

Flex Duo™ (Oven)

• Cook two dishes at different temperatures simultaneously with the Smart Divider.

Available Colors



Stainless Steel (shown)



Black Stainless Steel



Steam Cook



Flex Duo"

Features

- · Digital-Analog Controls
- 1.9/5.1 cu. ft. Capacity
- Hybrid Clean and Self-Clean (Oven)
- · Gourmet Cook (Oven)
- Dual Convection (Oven)
- Wi-Fi Connectivity
- Wi-Fi Enabled Temperature Probe (Oven)
- · LED Spotlights (Oven)
- · Easy View Window
- 3 Heavy-Duty Racks including a Gliding Rack (Oven)
- Soft-Close Door (Oven)

- · Ceramic Plate (Microwave)
- Rapid Preheat (Oven)
- Auto Latch Microwave Door
- 6 Oven Modes including Steam Bake and Steam Roast
- Blue LED Illuminated Knobs
- · Broil Element
- Smart Control Key (Oven)
- 6 Rack Positions (Oven)
- · Drop-Down Door Design
- LCD Display

Convenience

- Hidden Heating Element (Oven)
- Sabbath Mode (Oven)
- Delay Start (Oven)
- Proofing (Oven)
- Warming Mode (Oven)
- · Kitchen Timer
- Child Safety Lock
- Convection Conversion

NQ70M7770DS


30" Microwave Combination Wall Oven


Cabinet Dimensions

Product Dimensions

Combination Oven Installed in Cabinet

*Junction Box

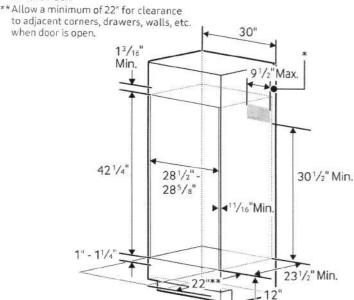

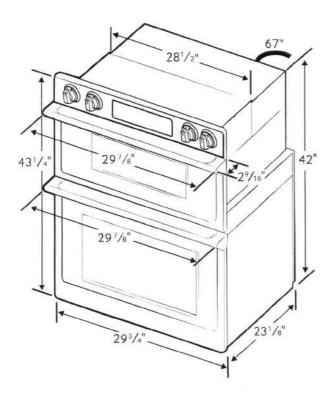

Total Capacity: 1.9/5.1 cu. ft.

• Microwave: 1.9 cu. ft.

• Wall Oven: 5.1 cu. ft. total, 2.8/2.2 cu. ft.

Hidden Bake Element

• Bake: 175°F-550°F

Convection Bake: 175°F–550°F
Convection Roast: 175°F–550°F

• Broil: Low-High

Steam Bake: 230°F–550°FSteam Roast: 230°F–550°F

• Proofing

Sabbath Mode

Warranty

One (1) Year All Parts and Labor Ten (10) Years Parts Warranty for Magnetron

Product Dimensions & Weight (WxHxD)

Outside (Max) Combination Oven Dimensions: 29 7/8" x 43 1/4" x 25 11/16"

Combination Oven Cut-Out Dimensions: 281/2" x 421/4" x 231/2"

Weight: 262.4 lbs.

Shipping Dimensions & Weight (WxHxD)

Dimensions:

 $33^{5}/_{8}$ " x $48^{3}/_{16}$ " x $29^{51}/_{64}$ "

Weight: 291.1 lbs.


Color	Model #	UPC Code
Stainless Steel	NQ70M7770DS	887276195186
Black Stainless Steel	NQ70M7770DG	887276195162

RATIN	G T
240V	9.5 kW
208V	7.2 kW
BREAK	ER SIZE
240V	40 Amps
208V	40 Amps

DW80R9950

SAMSUNG

Samsung Linear Wash 39 dBA Dishwasher



Signature Features

Linear Wash System

AquaBlast[™] jets provide corner to corner coverage for superior cleaning.

Whisper Quiet Cleaning

• Less noise and less disturbance with virtually silent wash cycles at 39 dBA.

AutoRelease™ Door

• At the end of a cycle, the door automatically opens to circulate air and improve drying performance.

Available Colors



Fingerprint Resistant Stainless Steel (shown)




Fingerprint Resistant Black Stainless Steel



Fingerprint Resistant Tuscan Stainless Steel



Linear Wash System



AutoRelease" Door

Features

- Flexible 3rd Rack
- Fingerprint Resistant Stainless Finish
- Zone Booster™
- Touch Control
- Quiet Operation: 39 dBA
- Wi-Fi Connectivity
- 7 Wash Cycles
- 8 Options
- Half-Load Cycle
- Express Cycle: 60 Minutes
- One-Touch Adjustable Racking System
- Full Stainless Steel Interior
- 15 Place Settings
- 3 Spray Wash Arms (Upper, Middle, Lower)

Convenience

- LED Time Display
- Control Lock
- Delay Start
- Digital Leak Sensor

Rating


ENERGY STAR®-rated: 239 kWh/yr

DW80R9950


SAMSUNG

Samsung Linear Wash 39 dBA Dishwasher

Installation Specifications

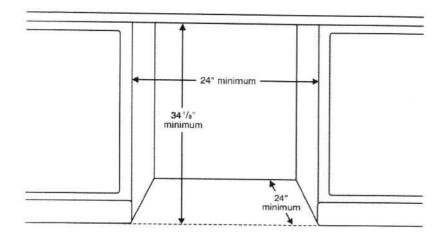

Dimensions

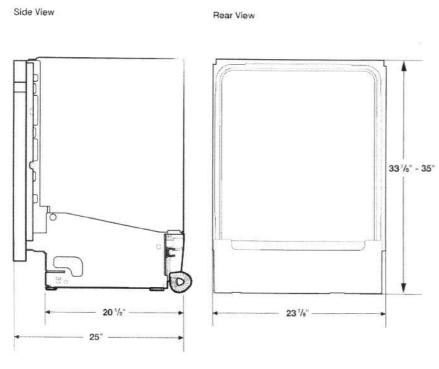

Features

- 7 Wash Cycles: Auto, Normal, Heavy, Delicate, Express 60, Rinse Only, Self Clean
- 8 Options: Half-Load Wash (Lower Rack), Zone Booster^{**} (Left), Speed Booster, Hi-Temp Wash, Sanitize (Anti-bacterial – NSF), Delay Start, Control Lock, Smart Control (Wi-Fi App)
- AutoRelease[™] Door
- Hidden Heat Element
- Stainless Steel Interior Tub

Convenience

- Control Lock
- · Digital Water Leakage Sensor
- Flexible Third Rack
- One-Touch Adjustable Racking System
- Silverware Basket
- Upper Rack: Foldable Cup Shelves, 2 Adjustable Tines
- · Lower Rack: Fold-Down Tines

Warranty

One (1) Year All Parts and Labor

Five (5) Year Limited on Printed Circuit Board and Interior Nylon Racks

Product Dimensions & Weight (WxHxD)

Dimensions (height is adjustable): $23^{7}/_{8}$ " x $33^{7}/_{8}$ " – 35" x 25"

Weight: 95 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 26" x 34³/₄" x 29³/₄"

Weight: 101 lbs

Color	Model #	UPC Code	
Fingerprint Resistant Stainless Steel	DW80R9950US	887276296647	
Fingerprint Resistant Black Stainless Steel	DW80R9950UG	887276296623	
Fingerprint Resistant Tuscan Stainless Steel	DW80R9950UT	887276320137	
	DW80R9950UT	8872763201	37


ELICA PRO SERIES LEONE






Give a splash of Italian design to your professional kitchen with Leone's crisp lines, seamless welded corner craftsmanship, beveled rim and gleaming stainless steel.

Leone has the extra depth (24") and power (1200 CFM on 36",42" & 48" W) & 36" in 600 CFM needed to support professional ranges and cooktops. No ear plugs required with Leone's HUSH sound suppression system, which enables you to comfortably talk and entertain, even when cooking up a storm. Available in 30", 36" and 42" widths, Leone features backlit hidden knob controls, which operate the 4-speed blower and LED lighting. Designed for standard ducted ventilation only.



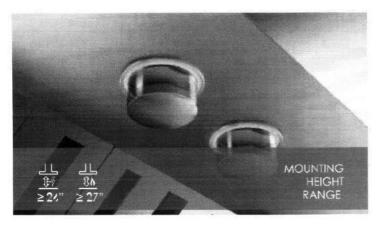


	\ \times_{\text{\chi}}	ELN636SS	- N. v. Koo	FINIARCE
	B_N830S2	ELNI 36S2	ELW14/252	ELIVA033
Α	30" (6.2 cm)	36" (91.4 cm)	42" (106.7 cm)	48" (121.0 cm)
В	/	24" (6	61 cm)	
С		Max: 47 5/8 " Min: 30" (
D	13 ² /16" (33.2 cm)			
E	10 ⁵ g" (27 cm)			
F	8" (2 0.3 cm)			

ELICA PRO SERIES

LEONE

SPECIFICATIONS





	30" Unit	36" Unit	42" Unit	48" Unit
Model:	\ 9	ELN636SS (600 CFM)		1
	ELN 63092	ELN136S2 (1200 CFM)	ELN 14252	ELN1488S
Dimensions:	30"W x 24"D x 1/8"H	36"W x 24"D x 12 1/8"H	42"W x 24"D x / 2 1/8 "H	48"W x 24"D x 12 1/8 "H
Blower Type (internal): Blower Performance:	600 CFM (4-speed)	600 CFM & 1200 CFM (4-speed)	1200 CFM(4-speed)	1200 CFM(4-speed)
Speed 1	205/CFM	205 CFM 375 CFM	375 EFM	3 X 5 CFM
Speed 2	350 CFM	350 CFM 640 CFM	640/CAM	640 CFM
Speed 3	51,0 OFM	510 CFM 940 CFM	940 CFM	/940\CFM
Speed 4	600 CFM	600 CFM 1200 CFM	1200 CFM	/1200 CFM
Noise (sones):	Min:2.01, Max:6	Min: .8 , Max: 9.5	Min:3/21, Max;7.7	Min:3.21, Max:7.7
Woking Speed		1923 91 (2)		
Finish: Controls:	E. Illy so	(TANKET BOARD	ess Steel	dialetie e
Illumination:	- 3.50	etractable rotating k 2 LED, 6.5 Watts (ELN636SS)		9 9
(replaceable lamps 1 intensity)	2 LED, 7.5 Watts	2 LED, 6.5 Walts (ELN136S2)	2 LED, 7.5 Watts	2 LED, 7.5 Watts
Filter Type:		r-Safe, Professional S		es haffled filters
Angled Baffle Filters:	1	2	2	3
Duct Transition:	8" Round with BackDraft Damper (top only)			
Installation Type:	Ducted Installation Only			
Electrical:		120V	- 60 Hz	
KITS:	KITO070E (121)			
Long Chimney Ext.	КІТО2785 (13') & КІТО1935 (11'4")			
1200 CFM External Blower	KIT0153054			
1200 CFM In Line Blower	KIT0154387			
Replacement Grease Filter (1):	GF09EA			
TO THE REPORT OF THE PROPERTY		LMP0131098A (ELN636SS		
Replacement Light Bulb (1):	LMP0131098	LMP0131098 (ELN136S2)	LMP0131098	LMP0131098
Light Bolb (1).		*Consumable parts o	are sold in units of one (1). Order accordingly
INSTALL HEIGHTS:				
Ranger Hood:		Min: 8', N	Max 10'	
Ranger Hood with	Min: 9'9", Max 13'			
	Min: 9 9 , Max 13			

PLUS FEATURES



HUSH SYSTEM - An exclusive sound deadening technology that effectively reduces sound levels by over 35%



LED CONSUMER REPLACEABLE BULB - High quality LED lighting usually requires a skilled lechnician to replace lamps. Avoid this expense with Elica's new LED lamps that enable homeowners to replace in seconds



SEAMLESS CRAFTSMANSHIP - Heavy gauge stainless steel "Seamless" construction that delivers refined elegance. *The product images shown are for illustration purposes only and may not be an exact representation of the product.



STAINLESS STEEL BAFFLE FILTERS WITH GREASE COLLECTORS - Designed for high airflow cooking, the "S" shape design traps high volumes of grease



PROFESSIONAL PERFORMANCE - Special features and high performances for models with aspiration capacity between 600 and 1200 CFM's



HEAT GUARD - Senses extreme temperatures (>158 degrees) and automatically adjusts the blower speed to HIGH

HOME APPLIANCES

LG LAUNDRY

WM4500HBA

5.0 cu.ft. Front Load Washer with TurboWash™360° and Built-In Intelligence

5.0 cu. ft. Mega Capacity TurboWash™ 360° Technology Al Fabric Sensor/ Smart Pairing™ ezDispense™ Automatic Dispenser AAFA Certified LG washer LG ThinQ® Technology / Proactive Customer Care ColdWash™ Technology Direct Drive Motor 10-Year Limited Warranty **ENERGY STAR® Certified** Closet Depth NeveRust™ Stainless Steel Tub and Lifters














Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- · Get alerts when the cycle is finished
- With Smart Pairing[™], the washer can tell the dryer to select a compatible drying cycle





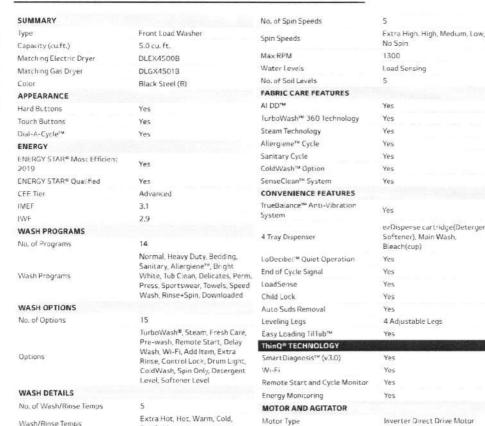

Axis

Tap Cold

) ic

MATERIALS AND FINISHES

	MATERIALS AND FINISHES	
ğ	NeveRust™ Stainless Steel Drum	Yes
	Cabinet	PCM
	Control Panel	Plastic
	Top Plate	Painted
	Door / Rim	Glass/Chrome
	Door Cover	Dark Black Tinted Square Cover
	All Available Colors	Black Steel (B)
	CERTIFICATION	
	AAFA	Yes
	POWER SOURCE	
	Ratings	UL Listed
	Electrical Requirements	120V, 10 Amps
	Туре	Electric
	OPTIONS/ACCESSORIES	
	Pedestal	WDP4B
L,	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
	LG Sidekick ^{IM} Pedestal Washer	WD100CB
	LG Sidekick ^{IIII} Pedestal Washer (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
	Stacking Kit	KSTK1
	DIMENSIONS	
	Product (WxHxD)	27" × 39" × 33 1/4"
	Depth with Door Open	(53 1/4" D with door open)
	Carton (WxHxD)	29 23/32" x 43 4/32" x 33 28/32"
	Weight (Product/Carton)	201.5 / 215.2 lbs
	LIMITED WARRANTY	
	Parts and Labor	1 Year
	Direct Drive Motor	10 Years
	Drum	3 Years
	UPC CODES	
	WM4500HBA (Black Steel)	048231026772

HOME APPLIANCES

LG LAUNDRY

DLEX4500B / DLGX4501B

7.4 cu.ft. Front Load Dryer with TurboSteam™ and **Built-In Intelligence**

7.4 cu. ft. Ultra Large Capacity TurboSteam™ Technology Al Fabric Sensor/ Smart Pairing™ LG ThinQ® Technology / Proactive Customer Care FlowSense™ Duct Clogging and Lint Filter Indicators ENERGY STAR® Certified Closet Depth LoDecibel™ Quiet Operation Reversible Door Wrinkle Care Option

AVAILABLE COLORS







Enjoy new ways to control your home with LG smart appliances

- · Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing[™], the washer can tell the dryer to select
- a compatible drying cycle

Door

All Available Colors



Matchine Washer Sensor Dry

APPEARANCE

Dial-A-Cycle™ Touch Buttons DRYER PROGRAMS No. of Programs

Programs (Sensor Dry)

Temperature Settings

Drying Levels

Manual Dry Times

No. of Options

Ontions

Intelligent Electronic Controls with

SUMMARY

Capacity

Sceam Color





	FABRIC CARE FEATURES	
Front Load Dryer	A.I Dry	Yes
7.4 cu. ft.	Sensor Dry	Yes
WM4500HBA Yes	Precise Temperature Control with Variable Heater	Yes
	Steam	TurboSteam™
Yes	CONVENIENCE FEATURES	
Black Steel (B)	3 Minute Installation Check	Yes
	LoDecibel™ Quiet Operation	Yes
Yes	End of Cycle Signal	Yes
Yes	Drum Light	Yes
Yes	Reversible Door	Yes
14	FlowSense™ Duct Clogging Indicator	Yes
Normal, Heavy Duty, Bedding,	Wrinkle Care Option	Yes
Small Load, Anti Bacterial, Steam-	Child Lock	Yes
Sanitary™, SteamFresh™, Perm Press, Delicates, Sportswear,	Venting Option	Electric: 4 Way Venting / Gas: 3. Way Venting
Towels, Speed Dry (Manual Dry),	4 Adjustable Legs	Yes
Air Dry (Manual Dry), Downloaded 12	Remaining Time Display/Status Indicator(s)	Yes
More Time, Less Time, Damp Dry	ThinQ® TECHNOLOGY	
Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, Tur-	Smart Diagnosis™ (v3,0)	Yes
boSteam™, Reduce Static, Remote	WI-Fi	Yes
Start, Drum Light, Signal	Remote Start and Cycle Monitor	Yes
High, Med.High, Medium, Low,	Energy Monitoring	Yes (Wi-Fi)
Ultra Low	ENERGY	
Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	ENERGY STAR® Certified	Yes
60 min., 50 min., 40 min., 30 min.,	CLF	Electric: 3.94 / Gas: 3.49
20 min., More Time/Less Time	MATERIALS AND FINISHES	
	NeveRust® Stainless Steel Drum	Yes
	Tub Rear	Painted
	Cabinet	Painted Steel



129B Caledon

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Туре	Electric, Gas
BTU Rating	10,000 Feet
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	383EEL9001B
Pedestal	WDP4B
Pedestal (WxHxD)	77 x 14 1/8 x 30 3/4 (50 1/7 D with door open)
DIMENSIONS (ELECTRIC)	
Product (WxHxD)	27" x 39" x 30"
Depth with Door Open	51"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	133.4 lbs
Weight (Carton)	150,1 lbs
DIMENSIONS (GAS)	
Product (WxHxD)	27" × 39" × 30"
Depth with Door Open	51"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	140.4 lbs
Weight (Carton)	153.0 lbs
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
UPC CODES	
DLEX4500B (Black Steel)	048231026789
DLGX4501B (Black Steel)	048231026796
WM4500HBA (Black Steel)	048231026772

Dark Black Tinted Square Cover

Black Steel (B)



S3RFBN / S3WFBN

KEY FEATURES

SMART - Wi-Fi Enabled

REFRESH - Reduce wrinkles and keep clothes smelling fresh

SANITARY - Reduces odors and allergens by True Steam®

GENTLE DRY - Gently dries clothing at low temperature with Heat Pump

PANTS CREASE CARE - Keeps pants creased while reducing wrinkles elsewhere











PRODUCT FEATURES

CAPACITY	
	11.5 lb (5.2kg) / 3 ltems + 1 (Pants)
FEATURES	
Touch Control Hidden Display	Yes
TrueSteam [®]	Yes
Heat-Pump System (Inverter)	Yes
Gentle Dry	Yes
Sound	On/Off
NFC Tag On Cycle Download (Android Mobile OS)	Yes (10 minute Default Course)
Interior Lights	3 LED (2 White, 1 Blue)
Reversible Door	Yes
CERTIFICATION / AWARDS	
BAF – British Allergy Foundation*	Yes
Intertek Certified**	Yes (99.9% sterilization effectiveness)
2015 F Product Design Award	Yes
Red Dot Design Award	Yes
FABRIC CARE	

Cotton, Linen, Wool, Silk, Rayon / Acetate / Polyester, Nylon, Denim / Surah / Gabardine, Velvet (Silk) / Plush (Silk, Longer Nap Than Velvet)

Estimated Cycle Times (minutes)	
- Refresh (Light/Normal/Heavy)	20/48/67 min.
- Sanitary (Normal/Heavy)	88/103 min.
- Gentle Dry (Normal/Delicates/Time Dry)	120/150/30-150 min.
- Special Care (Desembaded)	10 min


CAUTION


- Follow fabric care labels
- Found you rearns shall are sensitive to feat or are not suitable for washing with water in Styler cycles that use steam. Use the Drycycles only.
- Fur or leather terms should only be treated with the Air Fresh cycle. This is one of the default downloaded cycles on the machine
 Using the wrong cycle for items can result in damage to fabrics.

ACCESSORIES

2 Hangers, 1 Pants Hanger, 1 Shelf, 1 Drip Tray, 1 Acti-Tip Kit, 2 Rear Leveling Feet, 4 Carpet Install Spikes


0 2 6 6	CONVENIENCE		
	Portable Water Fill Container (no hose needed)	Yes	
	Portable Water Drainage Container (no hose needed)	Yes	
	Versatile Rack	Yes	
	Aroma Kit	Yes (sheets sold separately)	
	Pants Crease Care	Yes	
	Moving Hanger	3 clothes	
	SMART TECHNOLOGY (WI-FI)		
	Remote Control	Yes	
	Energy Monitoring	Yes	
	Black Box	Yes	
	SmartD:agnosis™	Yes	
	Download Course	Yes	
	One Touch	Yes	



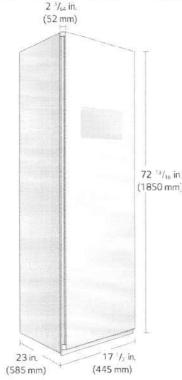

RECOMMENDED INSTALLATION SPACING

The following clearances are recommended for the Styler. The Styler has been tested for clearances of 13/16 inch (3 cm) on the sides and rear.

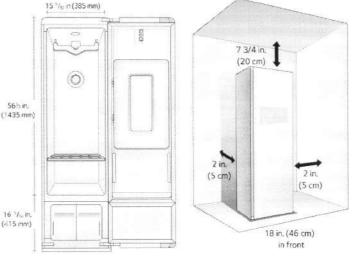

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 10 Amps/Electric, 60 Hz
Watts	1,500
Туре	Electric
DIMENSIONS	
Dimensions (WxHxD)	17 ½" X 72 3/4" × 23"
Carton Dimensions (WxHxD)	21" x 72 4/5" x 26"
Product Weight	183 lbs
Shipping Weight	207 lbs
Clearances	2" Side/Back, 7 3/4" Top
LIMITED WARRANTY	
1 Year Parts and Labo	or (In Home Service), 10 Year Smart Inverter Compressor
UPC CODES	
S3RFBN (Espresso Dark Brown)	048231025164
S3\MERN (\Mbite)	048231026314

^{*} Bindsh Allergy Foundation test results show reduction in exposure to House Dust Milte Allergen and Reduction of Live House Dust Miltes, Fungi and Bacueria.
** Insertek test results show that model S3RERB successfully reduces the reduction rate (pateric dal effectiveness) of Saureus (ATCC 5538) and E.coii (ATCC 25922) is all more than 99.9% under the sterilization course. Data on File.

DO NOT PUT THE FOLLOWING ITEMS IN THE STYLER: Starched or Vinyl Clothes, Electric Blankets, Heavy Blankets (Double Layer Or Over 3.3 Lb [1.5 Kg]), Shoes, Items Made With Sponge Rubber, Items With Adhesives